

# JVC

## SERVICE MANUAL

COLOR TELEVISION

**AV-27F476/R, AV-27F476/S,  
AV-32F476/Y, AV-32F476/Z**

BASIC CHASSIS

GJ5



*I'Art*™  
**BBE**

### TABLE OF CONTENTS

1	PRECAUTION.....	1-3
2	SPECIFIC SERVICE INSTRUCTIONS.....	1-4
3	DISASSEMBLY .....	1-6
4	ADJUSTMENT .....	1-12
5	TROUBLESHOOTING .....	1-27

# SPECIFICATION

Items		Contents	
		AV-27F476	AV-32F476
Dimensions (W × H × D)		82.9 cm × 59.3 cm × 51.9 cm (32-3/4" × 23-3/8" × 20-1/2")	93.9 cm × 68.5 cm × 57cm (37" × 27" × 22-1/2")
Mass		43.0 kg (94.6 lbs)	64.0 kg (140.8 lbs)
TV RF System		CCIR (M)	
Color System		NTSC	
Sound System		BTSC (Multi Channel Sound)	
Teletext System		Closed Caption (T1 - T4 / CC1 - CC4)	
TV Receiving Channels and Frequency	VHF low VHF high UHF CATV	02ch - 06ch: 54 MHz - 88 MHz 07ch - 13ch: 174 MHz - 216 MHz 14ch - 69ch: 470 MHz - 806 MHz 54MHz - 804 MHz Low Band: 02 - 06 High Band: 07 - 13 Mid Band: 14 - 22 Super Band: 23 - 36 Hyper Band: 37 - 64 Ultra Band: 65 - 94, 100 - 135 Sub Mid Band: 01, 96 - 99	
TV / CATV Total Channel		181 Channels [Reception of channel A-5 ("95" of the TV set's on-screen CABLE channel) is recommended for your TV set.]	
Intermediate Frequency	Video IF Sound IF	45.75 MHz 41.25 MHz (4.5 MHz)	
Color Sub Carrier		3.58 MHz	
Power Input		AC120 V, 60 Hz	
Power Consumption		140 W	160 W
Picture Tube (Visible size)		68 cm (29") Measured diagonally (H: 55.4 cm × V: 41.8 cm)	80 cm (34") Measured diagonally (H: 65.6 cm × V: 49.6 cm)
High Voltage		30.0 kV ±1.3 kV [at Zero beam current]	31.4 kV ±1.3 kV [at Zero beam current]
Speaker		6.5 cm × 13 cm (2-1/2" × 5"), Oval type × 2	
Audio Power Output		9 W + 9 W	
Antenna Terminal (VHF / UHF)		F-type connector, 75 Ω unbalanced	
Video / Audio input [Input-1/2/3]	Component Video [Input-2]  S-video [Input-1]  Video Audio	RCA pin jack × 3 Y : 1V(p-p), 75 Ω, negative sync Pb/Pr : 0.7 V(p-p), 75 Ω Mini DIN 4-pin connector × 1 Y : 1 V(p-p), 75 Ω, negative sync C : 0.286 V(p-p)(burst signal), 75 Ω 1 V(p-p), 75 Ω, negative sync, RCA pin jack × 2 500 mV(rms)(-4dBs), high impedance, RCA pin jack × 6	
Audio Output (Fix)		500 mV(rms)(-4dBs), low Impedance, (400 kHz when modulated 100 %), RCA pin jack × 2	
Remote Control Unit		RM-C1258G (AA/R6/UM-3 battery × 2)	

Design & specifications are subject to change without notice.

# SECTION 1 PRECAUTION

## 1.1 SAFETY PRECAUTIONS

- (1) The design of this product contains special hardware, many circuits and components specially for safety purposes. For continued protection, no changes should be made to the original design unless authorized in writing by the manufacturer. Replacement parts must be identical to those used in the original circuits. Service should be performed by qualified personnel only.
- (2) Alterations of the design or circuitry of the products should not be made. Any design alterations or additions will void the manufacturer's warranty and will further relieve the manufacturer of responsibility for personal injury or property damage resulting therefrom.
- (3) Many electrical and mechanical parts in the products have special safety-related characteristics. These characteristics are often not evident from visual inspection nor can the protection afforded by them necessarily be obtained by using replacement components rated for higher voltage, wattage, etc. Replacement parts which have these special safety characteristics are identified in the parts list of Service manual. **Electrical components having such features are identified by shading on the schematics and by (  $\Delta$  ) on the parts list in Service manual.** The use of a substitute replacement which does not have the same safety characteristics as the recommended replacement part shown in the parts list of Service manual may cause shock, fire, or other hazards.
- (4) **Use isolation transformer when hot chassis.**  
The chassis and any sub-chassis contained in some products are connected to one side of the AC power line. An isolation transformer of adequate capacity should be inserted between the product and the AC power supply point while performing any service on some products when the HOT chassis is exposed.
- (5) **Don't short between the LIVE side ground and ISOLATED (NEUTRAL) side ground or EARTH side ground when repairing.**  
Some model's power circuit is partly different in the GND. The difference of the GND is shown by the LIVE : (  $\perp$  ) side GND, the ISOLATED (NEUTRAL) : (  $\equiv$  ) side GND and EARTH : (  $\oplus$  ) side GND. Don't short between the LIVE side GND and ISOLATED (NEUTRAL) side GND or EARTH side GND and never measure the LIVE side GND and ISOLATED (NEUTRAL) side GND or EARTH side GND at the same time with a measuring apparatus (oscilloscope etc.). If above note will not be kept, a fuse or any parts will be broken.
- (6) If any repair has been made to the chassis, it is recommended that the B1 setting should be checked or adjusted (See B1 POWER SUPPLY check).
- (7) The high voltage applied to the picture tube must conform with that specified in Service manual. Excessive high voltage can cause an increase in X-Ray emission, arcing and possible component damage, therefore operation under excessive high voltage conditions should be kept to a minimum, or should be prevented. If severe arcing occurs, remove the AC power immediately and determine the cause by visual inspection (incorrect installation, cracked or melted high voltage harness, poor soldering, etc.). To maintain the proper minimum level of soft X-Ray emission, components in the high voltage circuitry including the picture tube must be the exact replacements or alternatives approved by the manufacturer of the complete product.
- (8) Do not check high voltage by drawing an arc. Use a high voltage meter or a high voltage probe with a VTVM. Discharge the picture tube before attempting meter connection, by connecting a clip lead to the ground frame and connecting the other end of the lead through a 10k $\Omega$  2W resistor to the anode button.
- (9) When service is required, observe the original lead dress. Extra precaution should be given to assure correct lead dress in the high voltage circuit area. Where a short circuit has occurred, those components that indicate evidence of overheating should be replaced. Always use the manufacturer's replacement components.

### (10) Isolation Check (Safety for Electrical Shock Hazard)

After re-assembling the product, always perform an isolation check on the exposed metal parts of the cabinet (antenna terminals, video/audio input and output terminals, Control knobs, metal cabinet, screw heads, earphone jack, control shafts, etc.) to be sure the product is safe to operate without danger of electrical shock.

#### a) Dielectric Strength Test

The isolation between the AC primary circuit and all metal parts exposed to the user, particularly any exposed metal part having a return path to the chassis should withstand a voltage of 1100V AC (r.m.s.) for a period of one second.

(... Withstand a voltage of 1100V AC (r.m.s.) to an appliance rated up to 120V, and 3000V AC (r.m.s.) to an appliance rated 200V or more, for a period of one second.) This method of test requires a test equipment not generally found in the service trade.

#### b) Leakage Current Check


Plug the AC line cord directly into the AC outlet (do not use a line isolation transformer during this check.). Using a "Leakage Current Tester", measure the leakage current from each exposed metal part of the cabinet, particularly any exposed metal part having a return path to the chassis, to a known good earth ground (water pipe, etc.). Any leakage current must not exceed 0.5mA AC (r.m.s.).

However, in tropical area, this must not exceed 0.2mA AC (r.m.s.).

#### Alternate Check Method



Plug the AC line cord directly into the AC outlet (do not use a line isolation transformer during this check.). Use an AC voltmeter having 1000 $\Omega$  per volt or more sensitivity in the following manner. Connect a 1500 $\Omega$  10W resistor paralleled by a 0.15 $\mu$ F AC-type capacitor between an exposed metal part and a known good earth ground (water pipe, etc.). Measure the AC voltage across the resistor with the AC voltmeter. Move the resistor connection to each exposed metal part, particularly any exposed metal part having a return path to the chassis, and measure the AC voltage across the resistor. Now, reverse the plug in the AC outlet and repeat each measurement. Any voltage measured must not exceed 0.75V AC (r.m.s.). This corresponds to 0.5mA AC (r.m.s.).

However, in tropical area, this must not exceed 0.3V AC (r.m.s.). This corresponds to 0.2mA AC (r.m.s.).

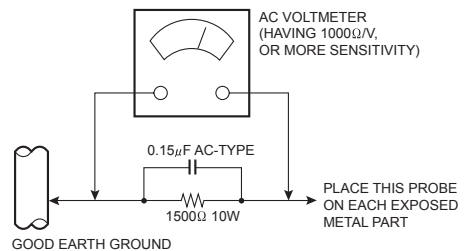

### (11) High voltage hold down circuit check.

After repair of the high voltage hold down circuit, this circuit shall be checked to operate correctly. See item "How to check the high voltage hold down circuit".

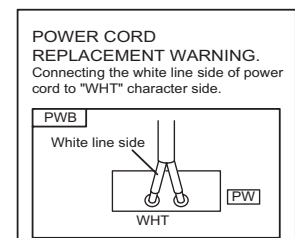

## SECTION 2

### SPECIFIC SERVICE INSTRUCTIONS

#### 2.1 FEATURES

##### SMART CAPTION

Smart caption will appear when you press the MUTING button, only on channels where the broadcast contains CLOSED CAPTION information.

##### SMART SOUND

Decreases high sound levels, giving a regulated sound level.

##### FLAT SQUARE CRT

It became legible from any position by CRT with few reflection and reflect lumps on the flat screen.

##### DIGITAL COMB FILTER

By the 3 line digital comb filter, the refreshed image can be seen.

##### VIDEO STATUS

Expression of a favorite screen can be chosen by the VIDEO STATUS function.

##### COMPONENT INPUT

Since the component signal input terminal is equipped, it reappears direct without deteriorating the signal from DVD.

##### V-CHIP

Since the V-CHIP is built in, it can choose, view and listen to a healthy program.

##### MTS STEREO

The voice multiplex function of the MTS system is built in. (MTS = Multi channel Television Sound system)

##### RETURN PLUS

You program a specific channel to return to while scanning through the channels using the CH+ and CH - keys.

##### VIDEO INPUT LABEL

This function is used to label video input connections for the onscreen displays.

##### WORLD CLOCK

The world clock feature provides time differences for some of the major cities around the world in real time.

##### BBE

High definition audio adds natural, clear and extraordinary sound quality to any program.

##### HYPER SURROUND


Creates a deep, three-dimensional sound effect by channeling the audio through the TV's front-firing speakers.

#### 2.2 MAIN DIFFERENCE LIST

Item	AV-27F476/R	AV-27F476/S	AV-32F476/Y	AV-32F476/Z
PICTURE TUBE (ITC)	A68ELH021X201	A68QCP693X003	A80AKS90X03	A80ERF182X17
MAIN PWB	SGJ-1580A-M2	SGJ-1579A-M2	SGJ-1572A-M2	SGJ-1575A-M2
CRT SOCKET PWB	SGJ-3523A-M2	←	SGJ-3521A-M2	SGJ-3522A-M2

#### 2.3 HOW TO IDENTIFY MODELS

How to recognize from the appearance of the model concerned is written below. Please distinguish from several contents currently printed on the rating label

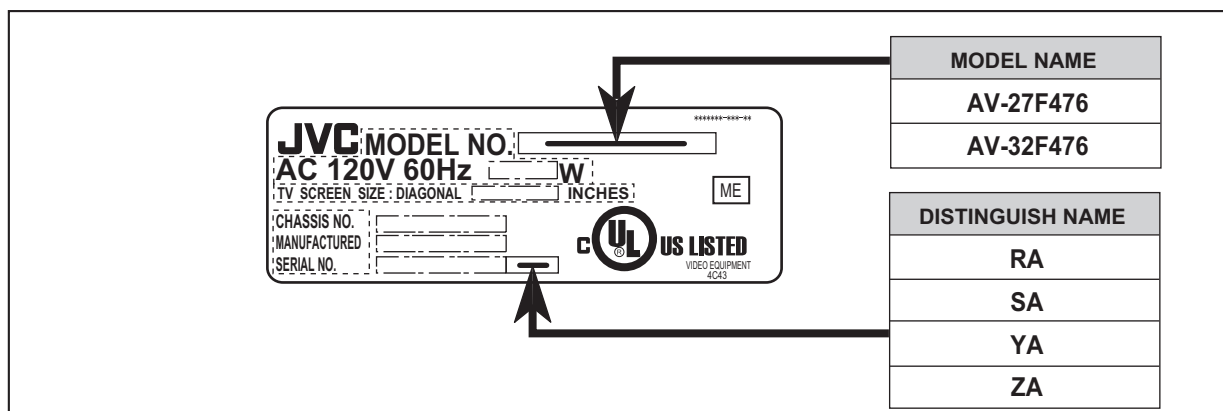

## 2.4 TECHNICAL INFORMATION

### 2.4.1 MAIN MI-COM (CPU) PIN FUNCTION

Pin No.	Pin name	I/O	Function	Pin No.	Pin name	I/O	Function
1	MTS_ADJ	I	Not used	29	YC_GND	-	GND
2	AFT1	I	AFT voltage for tuner (Tuning frequency control)	30	V1_IN	I	Not used
3	KEY	I	Key scan for front control [No signal: H]	31	ABCL	I	Current for automatic beam (brightness)/contrast limit
4	uP_DVss	-	GND	32	MONITOR_OUT	O	Not used
5	Reset	I	CPU reset [Reset: L]	33	BLACK_DET	-	Black level detection filter
6	8MHz_OUT	O	CPU system clock: 8MHz oscillation	34	SVM_OUT	O	Y signal for scan velocity scan modulation
7	8MHz_IN	I	CPU system clock: 8MHz oscillation	35	APL_FIL	-	Average picture level filter
8	TEST	-	GND	36	APC_FIL	-	Automatic phase control filter
9	uP_DVDD	I	5V	37	fsc_OUT	O	Color sub carrier (3.58MHz) for 3-line digital comb filter [IC5201]
10	AGC_MUTE	O	AGC muting for tuner (when channel select) [Muting : H]	38	YC_Vcc	I	5V (for video process circuit)
11	uP_VVSS	-	GND	39	R_OUT	O	R signal for CRT output
12	TV_HGND	-	GND	40	G_OUT	O	G signal for CRT output
13	FBP_SCP	I	Flyback pulse (H. pulse)	41	B_OUT	O	B signal for CRT output
14	HOUT	O	H. drive (oscillation)	42	RGB_Vcc	I	9V (for RGB process circuit)
15	H_Vcc	I	9V (for H. oscillation start)	43	IK_IN	I	Not used
16	HAFC_1	-	H. AFC filter	44	TV_DGND	-	GND
17	Vsaw	-	V. saw filter	45	uP_AGND	-	GND
18	VOUT	O	V. drive	46	uP_AVdd	-	5V
19	EW_OUT	O	Parabola waveform (for sidepin correction)	47	MAIN_POWER	O	Power on/off switching control [Power on: L]
20	X-RAY	I	X-ray detection (for protection) [Detection : H]	48	PANORAMA	I	Not used: Aspect size control [PANORAMA: L]
21	Ys	I	Not used	49	SDA0	I/O	Data for Inter IC control bus (for various devices)
22	Cb_IN	I	Cb (external) signal	50	SCL0	O	Clock for Inter IC control bus (for various devices)
23	Y_IN	I	Y (external) signal	51	SDA1	I/O	Data for Inter IC control bus (for main memory)
24	Cr_IN	I	Cr (external) signal	52	A_MUTING	O	Audio muting [Muting : H]
25	TV_DVcc	I	3.3V	53	SCL1	O	Clock for Inter IC control bus (for main memory)
26	V3IN/CIN	I	Chroma signal (for YC separation output)	54	LED	O	POWER / ON TIMER LED Indication [lighting : L]
27	EHT_IN	I	Not used	55	REMOCON	I	Remote control sensor input [No input : H]
28	V2_IN/Y_IN	I	Y signal (for YC separation output)	56	ASP_ABL	I	Not used

## SECTION 3

### DISASSEMBLY

#### 3.1 DISASSEMBLY PROCEDURE

##### 3.1.1 REMOVING THE REAR COVER

- (1) Disconnect the power plug.
- (2) Remove the 11 screws [A].
- (3) Withdraw the REAR COVER backward.

##### 3.1.2 REMOVING THE AV TERMINAL BOARD

- Remove the REAR COVER.
  - (1) Remove the 4 screws [B].
  - (2) Withdraw the AV TERMINAL BOARD toward you.

##### 3.1.3 REMOVING THE CHASSIS

- Remove the REAR COVER.
- Remove the AV TERMINAL BOARD.
  - (1) Slightly raise the both sides of CHASSIS by hand.
  - (2) Remove the 2 claws under the both side of the CHASSIS from the front cabinet.
  - (3) Withdraw the CHASSIS backward.  
(If necessary, remove the wire clamp, connectors etc.)

##### 3.1.4 REMOVING THE SPEAKER

- Remove the REAR COVER.
  - (1) Remove the 2 screws [C], then remove the SPEAKER with SPEAKER HOLDER.
  - (2) Remove the 2 screws [D], then remove the SPEAKER from the SPEAKER HOLDER.
  - (3) Follow the same steps when removing the other hand SPEAKER.

#### NOTE :

When remove the 2 screws [C] of the SPEAKER, remove the lower side screw first, and then remove the upper one.

##### 3.1.5 REMOVING THE LED & POWER SW PWB

- Remove the REAR COVER.
    - (1) Remove the 2 screws [E].
    - (2) Withdraw the LED & POWER SW PWB toward you.
- \*If necessary, remove the wire clamp, connector etc.

##### 3.1.6 REMOVING THE FRONT CONTROL PWB

- Remove the REAR COVER.
    - (1) Remove the 2 screws [F].
    - (2) Withdraw the FRONT CONTROL PWB toward you.
- \*If necessary, remove the wire clamp, connector etc.

##### 3.1.7 CHECKING THE CHASSIS

To check the PW Board from back side.


- (1) Pull out the CHASSIS (refer to REMOVING THE CHASSIS).
- (2) Erect the CHASSIS vertically with the HVT side facing up so that you can easily check the back side of the PW board.

#### CAUTION :

- When erecting the CHASSIS, be careful so that there will be no contacting with other PW Board.
- Before turning on power, make sure that the wire connector is properly connected.
- **When conducting a check with power supplied, be sure to confirm that the CRT EARTH WIRE (BRAIDED ASS'Y) is connected to the CRT SOCKET PWB.**

##### 3.1.8 WIRE CLAMPING AND CABLE TYING

- (1) Be sure to clamp the wire.
- (2) Never remove the cable tie used for tying the wires together. Should it be inadvertently removed, be sure to tie the wires with a new cable tie.

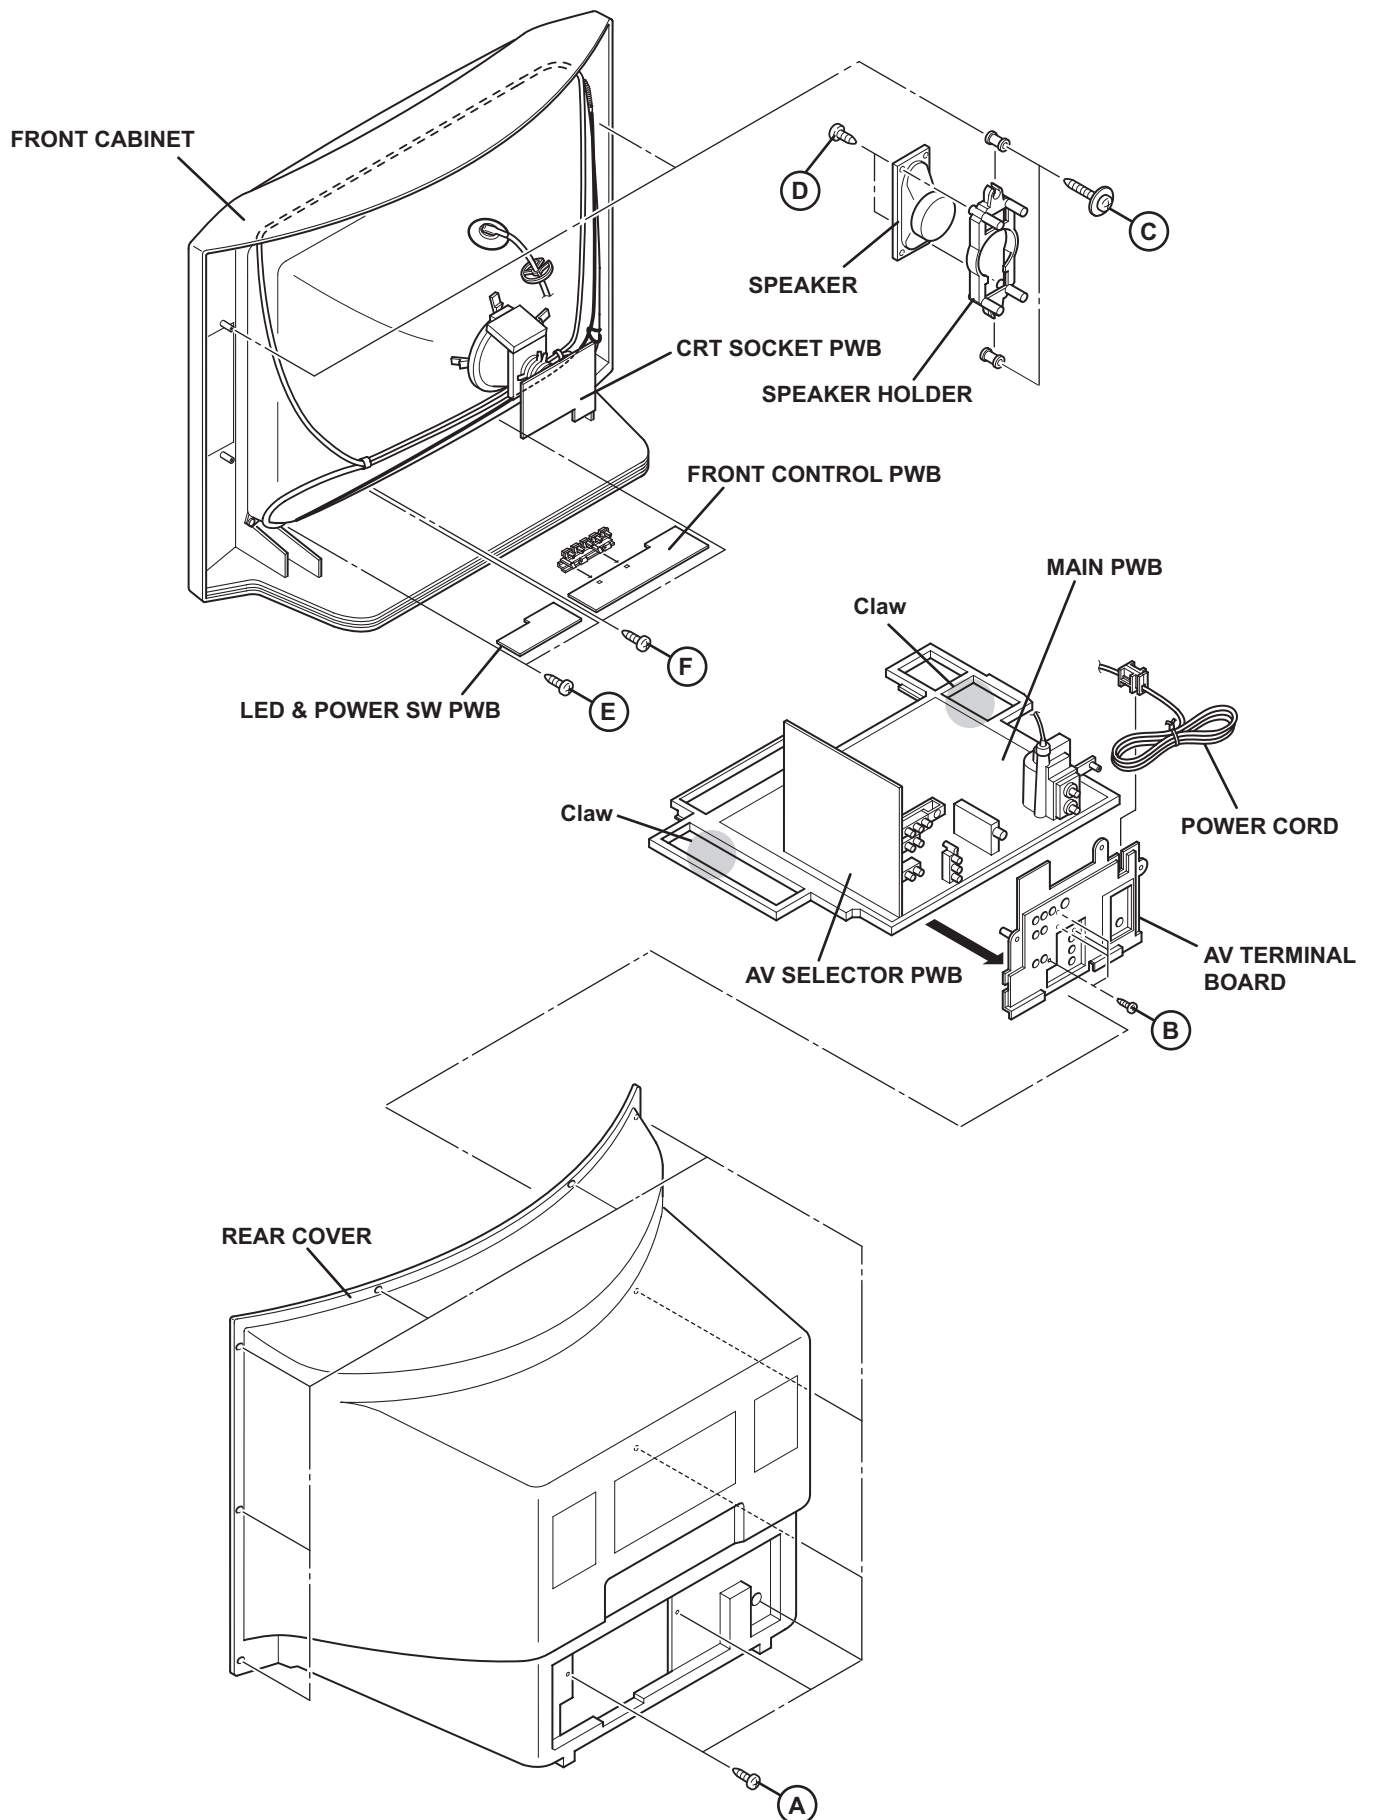

### 3.1.9 REMOVING THE CRT

#### NOTE:

- Replacement of the CRT should be performed by 2 or more persons.
  - After removing the REAR COVER, CHASSIS etc.,
- (1) Putting the CRT change table on soft cloth, the CRT change table should also be covered with such soft cloth (shown in Fig. 2).
  - (2) While keeping the surface of CRT down, mount the TV set on the CRT change table balanced will as shown in Fig. 2.
  - (3) Remove 4 screws marked by arrows with a box type screw-driver as shown in Fig. 3.

#### NOTE:

Since the cabinet will drop when screws have been removed, be sure to support the cabinet with hands.

- (4) After 4 screws have been removed, put the cabinet slowly on cloth (At this time, be carefully so as not to damage the front surface of the cabinet) shown in Fig. 4.

#### NOTE:

- The CRT should be assembled according to the opposite sequence of its dismantling steps.
- The CRT change table should preferably be smaller than the CRT surface, and its height be about 35cm.

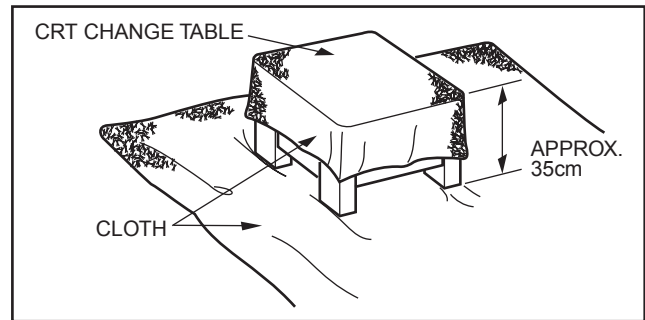


Fig.2

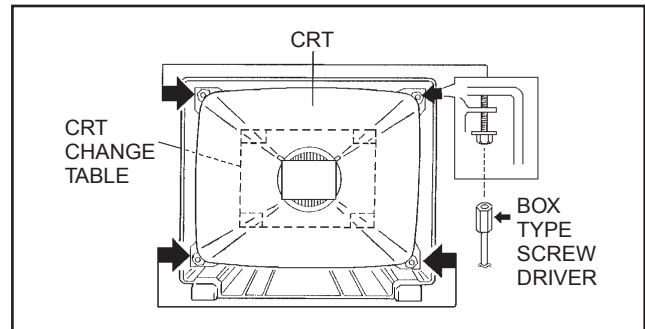


Fig.3

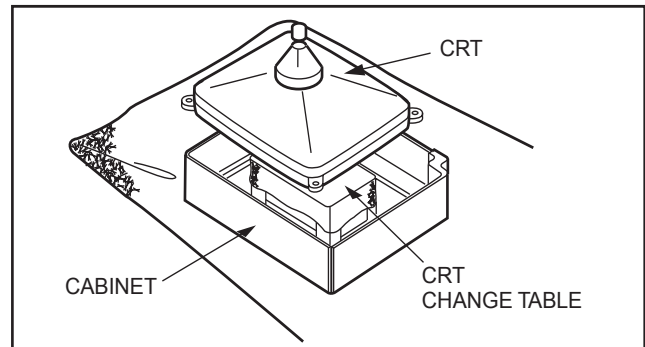


Fig.4

### COATING OF SILICON GREASE FOR ELECTRICAL INSULATION ON THE CRT ANODE CAP SECTION.

Subsequent to replacement of the CRT and HV transformer or repair of the anode cap, etc. by dismantling them, be sure to coat silicon grease for electrical insulation as shown in Fig.5. Wipe around the anode button with clean and dry cloth. (Fig.5) Coat silicon grease on the section around the anode button. At this time, take care so that any silicon greases dose not sticks to the anode button. (Fig.6)

**Silicon grease product No. KS - 650N**

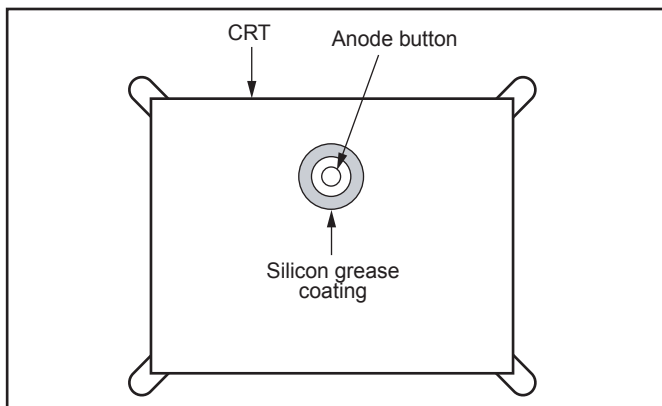


Fig.5

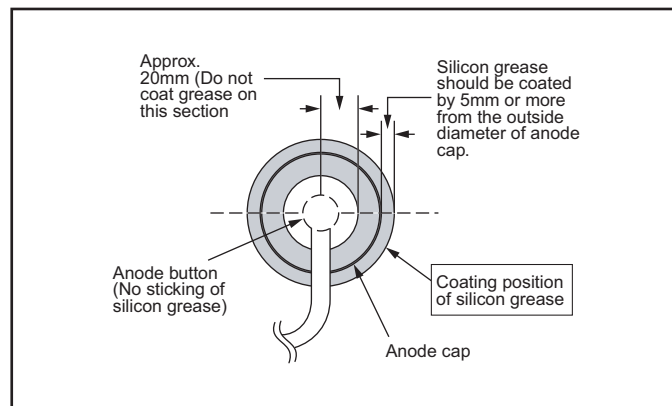


Fig.6



## 3.2 MEMORY IC REPLACEMENT

- This model uses the memory IC.
- This memory IC stores data for proper operation of the video and drive circuits.
- When replacing, be sure to use an IC containing this (initial value) data.

### 3.2.1 MEMORY IC REPLACEMENT PROCEDURE

#### 1. Power off

Switch off the power and disconnect the power plug.

#### 2. Replace the memory IC

Be sure to use a memory IC written with the initial setting data.

#### 3. Power on

Connect the power cord to the wall outlet and switch on the power.

#### 4. Receiving channel setting

Refer to the OPERATING INSTRUCTIONS (USER'S GUIDE) and set the receive channels (Channels Preset) as described.

#### 5. User settings

Check the user setting items according to the "FACTORY SETTING ITEM" table.

Where these do not agree, refer to the OPERATING INSTRUCTIONS (USER'S GUIDE) and set the items as described.

#### 6. SERVICE MODE setting

Verify what to set in the SERVICE MODE, and set whatever is necessary(Fig.1) .

Refer to the SERVICE ADJUSTMENT for setting.

### 3.2.2 SERVICE MODE SETTING ITEMS






SERVICE MENU	
1. V/C(S)	2. DEF(D)
3. SOUND(A)	4. OTHERS(F)
5. 3L Y/C(LYC)	
7. LOW LIGHT	8. HIGH LIGHT
9. VCO	
11. I2C BUS	12. SYSTEM(SYS)
SELECT BY  	
OPERATE BY   EXIT BY 	

Fig.1

Setting items	Settings	Item No.
<b>1. V/C(S)</b> (Video setting)	Adjust	S01~S48
<b>2. DEF(D)</b> (Deflection setting)	Adjust	D01~D33
<b>3. SOUND(A)</b> (Audio setting)	Adjust	A01~A08
<b>4. OTHERS [Do not adjust]</b> (Factory setting)	Fixed	F01~F18
<b>5. 3L Y/C(LYC) [Do not adjust]</b> (Y/C separate setting)	Fixed	LYC01~LYC12
<b>7. LOW LIGHT</b> (White balance setting)	Adjust	---
<b>8. HIGH LIGHT</b> (White balance setting)	Adjust	---
<b>9. VCO</b> (VCO setting)	Adjust	---
<b>11. I2C BUS [Do not adjust]</b> (I <sup>2</sup> C BUS setting)	Fixed	---
<b>12.SYSTEM (SYS)</b> (System constant setting)	Fixed	SYS01~SYS26

### 3.2.3 SETTINGS OF FACTORY SHIPMENT

#### 3.2.3.1 BUTTON OPERATION

Setting item	Setting position
POWER	Off
CHANNEL	CH-02
VOLUME	10

#### 3.2.3.2 REMOTE CONTROL DIRECT OPERATION

Setting item		Setting position
INPUT		TV
CHANNEL		CH-02
VOLUME		10
MUTING		OFF
DISPLAY		OFF
SLEEP TIMER		OFF
THEATER PRO		OFF
VIDEO STATUS		DYNAMIC
ASPECT		4 : 3
SOUND	HYPER SURROUND	OFF
	BBE	ON

#### 3.2.3.3 REMOTE CONTROL MENU OPERATION

##### (1) PICTURE ADJUST

Setting item	Setting position
TINT	0
COLOR	0
PICTURE	+8
BRIGHT	0
DETAIL	+8
COLOR TEMPERATURE	HIGH
NOISE MUTING	ON
VSM	ON

##### (2) SOUND ADJUST

Setting item	Setting position
BASS	0
TREBLE	0
BALANCE	0
MTS	STEREO
SMART SOUND	OFF

##### (3) CLOCK / TIMERS

Setting item	Setting position
SET CLOCK	OFF
ON / OFF TIMER	OFF

##### (4) INITIAL SETUP

Setting item	Setting position
LANGUAGE	ENG.
CLOSED CAPTION	OFF(CC1/T1)
FRONT PANEL LOCK	OFF
AUTO SHUT OFF	OFF
XDS ID	ON
V-CHIP	OFF

### 3.3 REPLACEMENT OF CHIP COMPONENT

#### 3.3.1 CAUTIONS

- (1) Avoid heating for more than 3 seconds.
- (2) Do not rub the electrodes and the resist parts of the pattern.
- (3) When removing a chip part, melt the solder adequately.
- (4) Do not reuse a chip part after removing it.

#### 3.3.2 SOLDERING IRON


- (1) Use a high insulation soldering iron with a thin pointed end of it.
- (2) A 30w soldering iron is recommended for easily removing parts.

#### 3.3.3 REPLACEMENT STEPS


##### 1. How to remove Chip parts

[Resistors, capacitors, etc.]

- (1) As shown in the figure, push the part with tweezers and alternately melt the solder at each end.



- (2) Shift with the tweezers and remove the chip part.




[Transistors, diodes, variable resistors, etc.]

- (1) Apply extra solder to each lead.



- (2) As shown in the figure, push the part with tweezers and alternately melt the solder at each lead. Shift and remove the chip part.




#### NOTE :

After removing the part, remove remaining solder from the pattern.


##### 2. How to install Chip parts

[Resistors, capacitors, etc.]

- (1) Apply solder to the pattern as indicated in the figure.




- (2) Grasp the chip part with tweezers and place it on the solder. Then heat and melt the solder at both ends of the chip part.




[Transistors, diodes, variable resistors, etc.]

- (1) Apply solder to the pattern as indicated in the figure.
- (2) Grasp the chip part with tweezers and place it on the solder.
- (3) First solder lead **A** as indicated in the figure.



- (4) Then solder leads **B** and **C**.



## SECTION 4

### ADJUSTMENT

#### 4.1 ADJUSTMENT PREPARATION

- (1) There are 2 ways of adjusting this TV : One is with the **REMOTE CONTROL UNIT** and the other is the conventional method using adjustment parts and components.
- (2) The adjustment using the **REMOTE CONTROL UNIT** is made on the basis of the initial setting values. The setting values which adjust the screen to the optimum condition can be different from the initial setting values.
- (3) Make sure that connection is correctly made AC to AC power source.
- (4) Turn on the power of the TV and measuring instruments for warming up for at least 30 minutes before starting adjustments.
- (5) If the receive or input signal is not specified, use the most appropriate signal for adjustment.
- (6) Never touch the parts (such as variable resistors, transformers and condensers) not shown in the adjustment items of this service adjustment.

#### 4.2 PRESET SETTING BEFORE ADJUSTMENTS

Unless otherwise specified in the adjustment items, preset the following functions with the **REMOTE CONTROL UNIT**.

Item	Preset value
VIDEO STATUS	STANDARD
PICTURE adjustment	All 00
COLOR TEMPERATURE	LOW
VSM	OFF
SOUND adjustment	All 00
BBE	OFF
HYPER SORROUND	OFF
ASPECT	4 : 3

#### 4.3 MEASURING INSTRUMENT AND FIXTURES

- DC voltmeter (or digital voltmeter)
- Oscilloscope
- Signal generator (Pattern generator) [NTSC]
- TV audio multiplex signal generator
- Remote control unit

#### 4.4 ADJUSTMENT ITEMS

##### ■CHECK ITEM

- B1 VOLTAGE check
- HIGH VOLTAGE HOLD DOWN check

##### ■FOCUS

- FOCUS adjustment

##### ■DEFLECTION CIRCUIT

- V. SIZE / V. POSITION (4:3) adjustment
- V. SIZE / V. POSITION (16:9) adjustment
- H. POSITION / H. SIZE / SIDE PIN (4:3) / (16:9) adjustment


##### ■VIDEO CIRCUIT

- WHITE BALANCE(High Light & Low Light) adjustment
- SUB BRIGHT adjustment
- SUB CONTRAST adjustment


##### ■MTS CIRCUIT

- MTS INPUT LEVEL adjustment
- MTS SEPARATION adjustment

## 4.5 ADJUSTMENT LOCATIONS

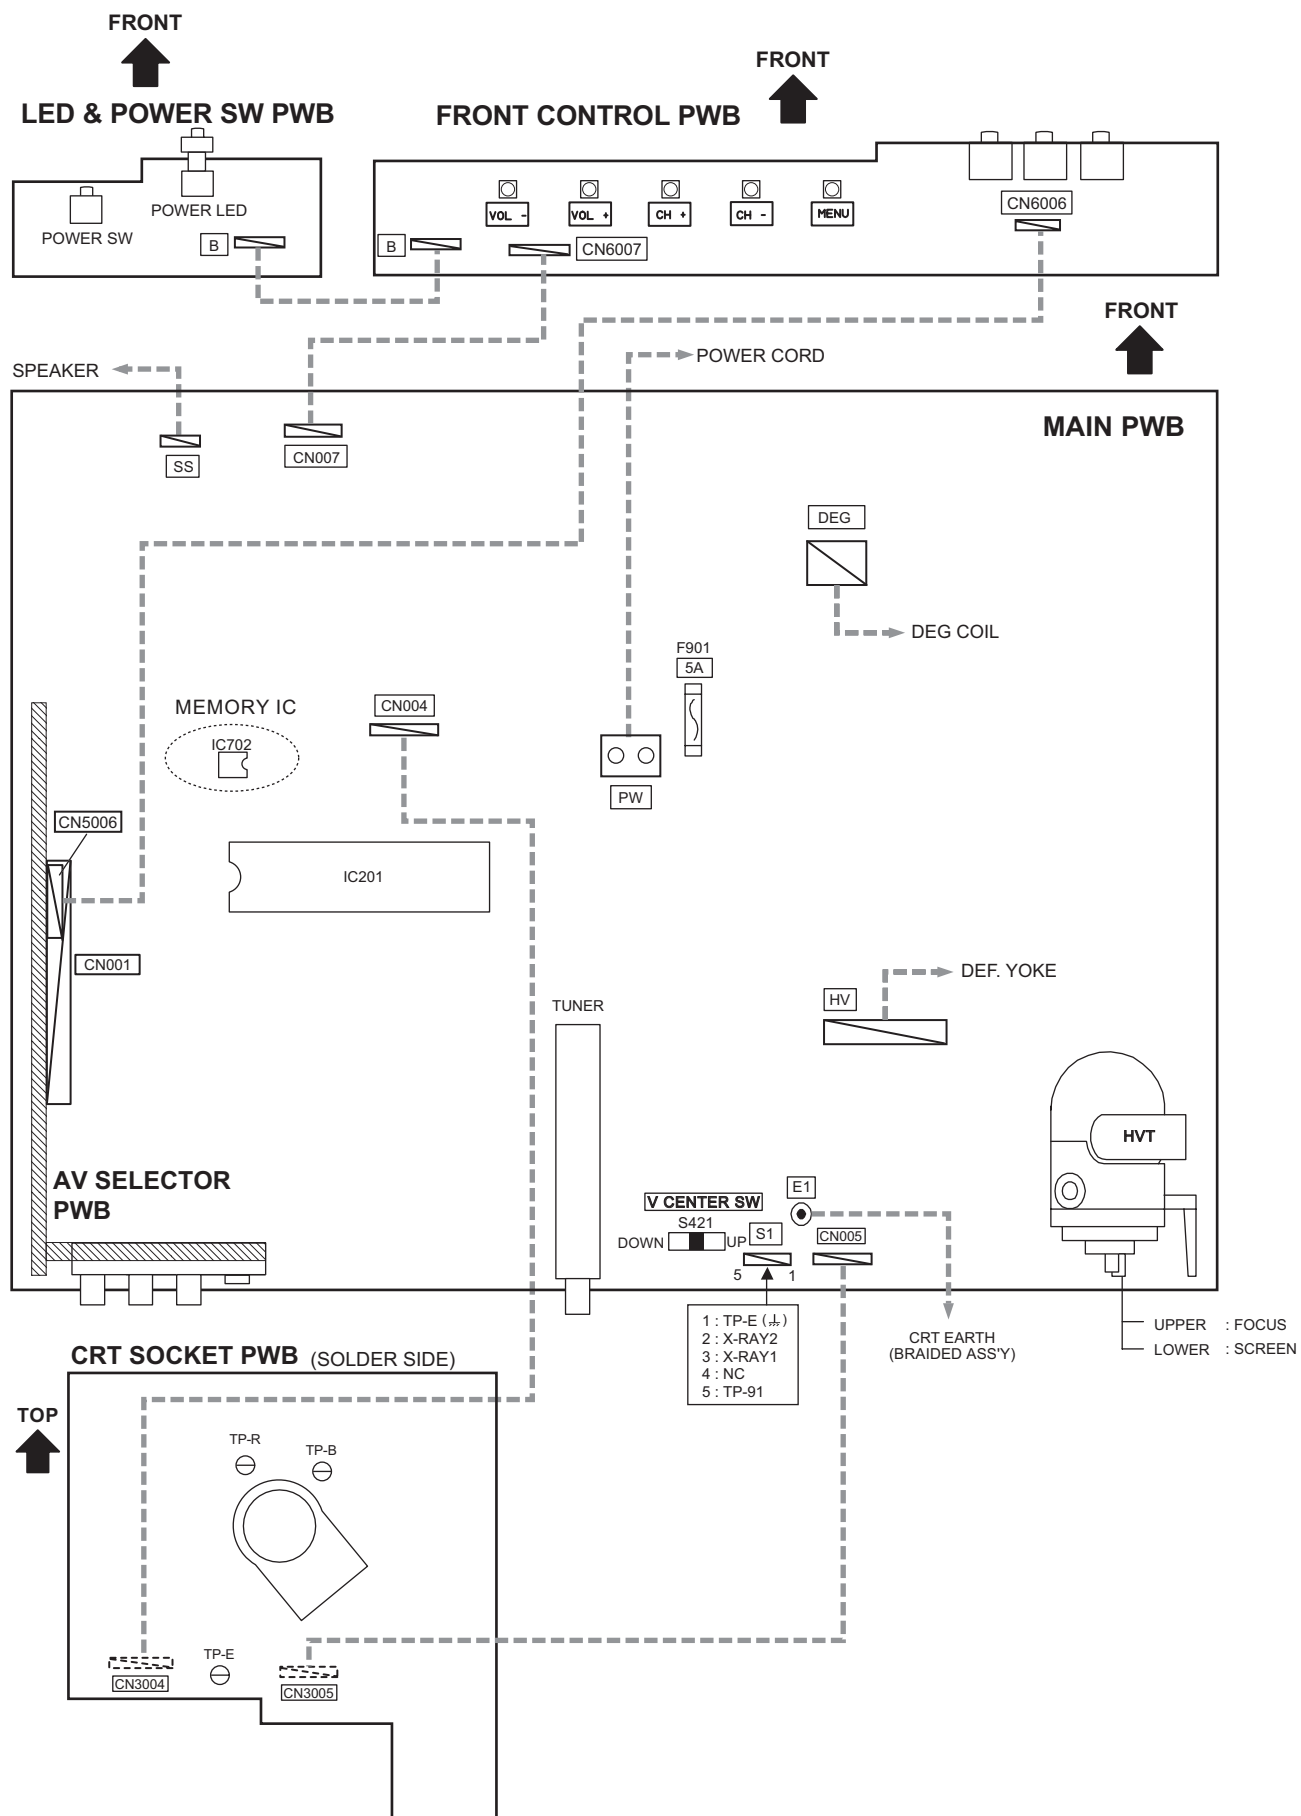

4.6 BASIC OPERATION OF SERVICE MODE

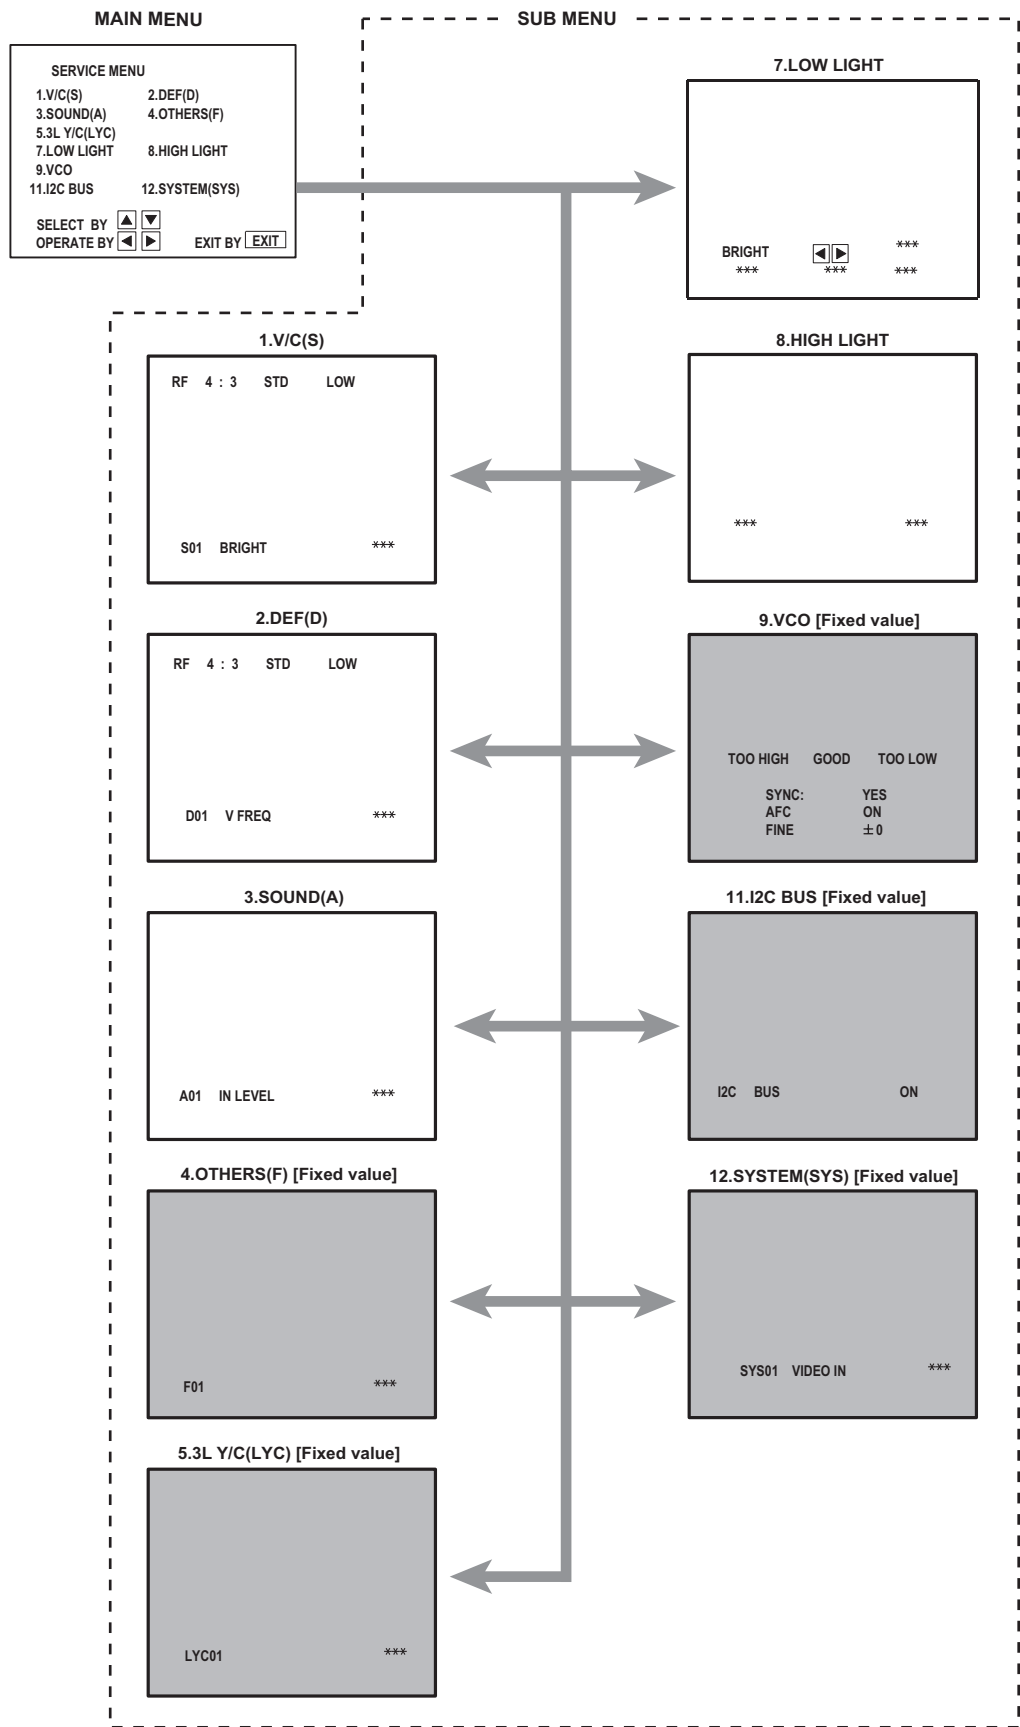

#### 4.6.1 TOOL OF SERVICE MODE OPERATION

Operate the SERVICE MODE with the REMOTE CONTROL UNIT.

#### 4.6.2 SERVICE MODE ITEMS

In general, basic setting (adjustments) items or verifications are performed in the SERVICE MODE.

1. V/C (S)	This sets the setting values of the VIDEO circuit.
2. DEF (D)	This sets the setting values of the DEFLECTION circuit.
3. SOUND (A)	This sets the setting values of the AUDIO circuit.
4. OTHERS (F)	This sets the setting values of the factory settings. <b>[Do not adjust]</b>
6. 3L Y/C(LYC)	This sets the setting values of the 3 line YC separation control circuit. <b>[Do not adjust]</b>
7. LOW LIGHT	This sets the setting values of the WHITE BALANCE (LOW LIGHT) control circuit.
8. HIGH LIGHT	This sets the setting values of the WHITE BALANCE (HIGH LIGHT) control circuit.
9. VCO	This sets the setting values of the VCO control circuit. <b>[Do not adjust]</b>
11. I2C BUS	This sets the setting values of the I <sup>2</sup> C BUS control circuit. <b>[Do not adjust]</b>
12. SYSTEM(SYS)	This sets the setting values of the system control circuit. <b>[Do not adjust]</b>

#### 4.6.3 HOW TO ENTER THE SERVICE MODE

- (1) Set to 0 minutes using the **[SLEEP TIMER]** key.
- (2) Press the **[VIDEO STATUS]** key and **[DISPLAY]** key simultaneously while "0 MIN" is displayed, then enter the SERVICE MODE.

##### NOTE:


Before entering the SERVICE MODE, confirm that the setting of TV / CATV switch of the REMOTE CONTROL UNIT is at the "TV" side and the setting of VCR / DVD switch is at the "VCR" side. If the switches have not been properly set, you cannot enter the SERVICE MODE.

#### 4.6.4 HOW TO STORE OF SETTING VALUE

The setting value will be stored automatically when release the REMOTE CONTROL UNIT keys

#### 4.6.5 HOW TO EXIT THE SERVICE MODE

Press the **[EXIT]** key to exit the SERVICE MODE.

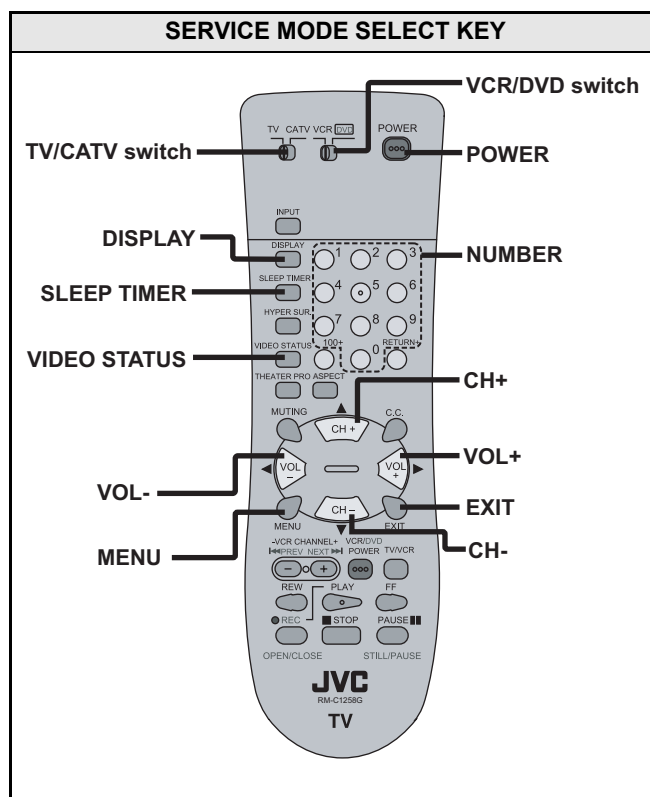


## 4.6.6 SERVICE MODE SETTING

### 1. V/C, 2. DEF

- Press **[CH+]** / **[CH-]** key  
For scrolling up/down the adjustment item.
- Press **[VOL+]** / **[VOL-]** key  
For scrolling up/down the data values.

#### NOTE:

The setting value will be stored automatically when release the REMOTE CONTROL UNIT keys.

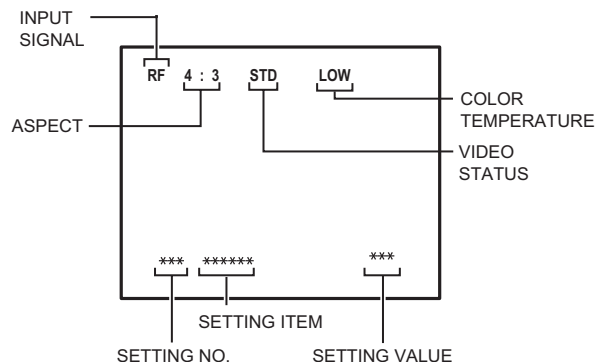

#### (1) INPUT SIGNAL

- RF : Antenna input
- COMP : External (Component) input
- EXT : External (S / Composite) input

#### (2) ASPECT

- 4 : 3 : 4 : 3 screen mode
- 16 : 9 : 16 : 9 screen mode

#### (3) VIDEO STATUS

- STD : STANDARD
- THEA : THEATER

#### (4) COLOR TEMPERATURE


- HIGH : White balance high mode
- LOW : White balance low mode

### 3. SOUND (A)

- Press **[CH+]** / **[CH-]** key  
For scrolling up/down the adjustment item.
- Press **[VOL+]** / **[VOL-]** key  
For scrolling up/down the data values.

#### NOTE:

The setting value will be stored automatically when release the REMOTE CONTROL UNIT keys.




### 7. LOW LIGHT

The settings for WHITE BALANCE(LOW LIGHT) control circuit.

#### NOTE:

The setting value will be stored automatically when release the REMOTE CONTROL UNIT keys.

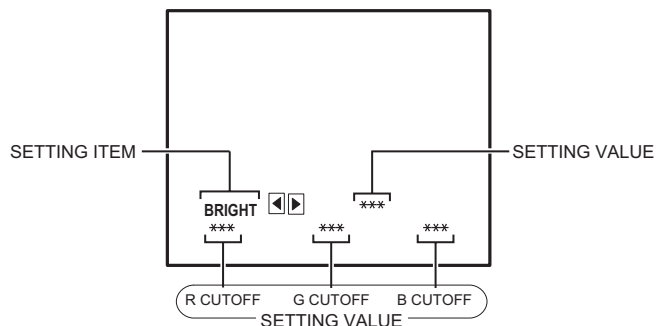


### 8. HIGH LIGHT

The settings for WHITE BALANCE(HIGH LIGHT) control circuit.

#### NOTE:

The setting value will be stored automatically when release the REMOTE CONTROL UNIT keys.





#### 4.7 INITIAL SETTING VALUE OF SERVICE MODE

- (1) Adjustment of the SERVICE MODE is made on the basis of the initial setting values ; however, the new setting values which set the screen in its optimum condition may differ from the initial setting.
- (2) Do not change the initial setting values of the setting items NOT LISTED IN ADJUSTMENT PROCEDURE.
- (3) --- : This mark described in each table shows "Cannot adjust it."

##### 4.7.1 [1.V/C(S)]

No.	Setting item	Variable range	Initial setting value				
			AV-27F476/R AV-27F476/S				
			RF		EXTERNAL (S / COMPOSITE)	EXTERNAL (COMPONENT)	
			STANDARD		THEATER	STANDARD	STANDARD
			4 : 3	16 : 9	4 : 3	4 : 3	4 : 3
S01	BRIGHT	0 - 127	64	---	---	---	---
S02	PICTURE	0 - 127	55	---	---	---	---
S03	COLOR	0 - 127	48	---	---	---	48
S04	TINT	0 - 127	50	---	---	---	72
S05	DETAIL	0 - 63	35	---	---	40	40
S06	BRIGHT+-	-32 - +32	---	±0	+1	+4	-4
S07	PICT+-	-32 - +32	---	-8	-7	+3	+3
S08	COLOR+-	-32 - +32	---	±0	-3	-3	---
S09	TINT+-	-32 - +32	---	±0	-3	+14	---
S10	DETAIL+-	-32 - +32	---	---	±0	---	---

No.	Setting item	Variable range	Initial setting value				
			AV-32F476/Y				
			RF		EXTERNAL (S / COMPOSITE)	EXTERNAL (COMPONENT)	
			STANDARD		THEATER	STANDARD	STANDARD
			4 : 3	16 : 9	4 : 3	4 : 3	4 : 3
S01	BRIGHT	0 - 127	64	---	---	---	---
S02	PICTURE	0 - 127	55	---	---	---	---
S03	COLOR	0 - 127	45	---	---	---	43
S04	TINT	0 - 127	58	---	---	---	70
S05	DETAIL	0 - 63	35	---	---	40	40
S06	BRIGHT+-	-32 - +32	---	±0	+3	-2	-2
S07	PICT+-	-32 - +32	---	-8	-7	+2	+2
S08	COLOR+-	-32 - +32	---	±0	-3	±0	---
S09	TINT+-	-32 - +32	---	±0	-3	+6	---
S10	DETAIL+-	-32 - +32	---	---	±0	---	---

No.	Setting item	Variable range	Initial setting value				
			AV-32F476/Z				
			RF		EXTERNAL (S / COMPOSITE)	EXTERNAL (COMPONENT)	
			STANDARD		THEATER	STANDARD	STANDARD
			4 : 3	16 : 9	4 : 3	4 : 3	4 : 3
S01	BRIGHT	0 - 127	64	---	---	---	---
S02	PICTURE	0 - 127	50	---	---	---	---
S03	COLOR	0 - 127	45	---	---	---	45
S04	TINT	0 - 127	56	---	---	---	70
S05	DETAIL	0 - 63	35	---	---	40	40
S06	BRIGHT+-	-32 - +32	---	±0	+3	-2	-3
S07	PICT+-	-32 - +32	---	-8	-7	+2	±0
S08	COLOR+-	-32 - +32	---	±0	-3	-1	---
S09	TINT+-	-32 - +32	---	±0	-3	+14	---
S10	DETAIL+-	-32 - +32	---	---	±0	---	---

No.	Setting item	Variable range	Initial setting value							
			AV-27F476/R AV-27F476/S							
			RF / EXTERNAL (S / COMPOSITE)				EXTERNAL (COMPONENT)			
			STANDARD		THEATER		STANDARD		THEATER	
			LOW	HIGH	LOW	HIGH	LOW	HIGH	LOW	HIGH
S11	R CUT OFF	0 - 255	30	---	---	---	---	---	---	---
S12	G CUT OFF	0 - 255	30	---	---	---	---	---	---	---
S13	B CUT OFF	0 - 255	30	---	---	---	---	---	---	---
S14	R DRIVE	0 - 127	64	---	---	---	---	---	---	---
S15	B DRIVE	0 - 127	64	---	---	---	---	---	---	---
S16	R CUT +-	-128 - +127	---	±0	±0	±0	-5	---	---	---
S17	G CUT +-	-128 - +127	---	±0	±0	±0	±0	---	---	---
S18	B CUT +-	-128 - +127	---	±0	±0	±0	-6	---	---	---
S19	R DRV +-	-128 - +127	---	+5	+13	+7	±0	---	---	---
S20	B DRV +-	-128 - +127	---	+6	-25	-9	±0	---	---	---
S21	NTSC MAT	0 - 3	3	3	1	1	2	2	1	1
S22	BLACK ST	0 - 3	2	---	2	---	---	---	---	---
S23	DC REST	0 - 1	1	---	1	---	---	---	---	---
S24	DCRSW	0 - 1	1	---	1	---	---	---	---	---

No.	Setting item	Variable range	Initial setting value							
			AV-32F476/Y AV-32F476/Z							
			RF / EXTERNAL (S / COMPOSITE)				EXTERNAL (COMPONENT)			
			STANDARD		THEATER		STANDARD		THEATER	
			LOW	HIGH	LOW	HIGH	LOW	HIGH	LOW	HIGH
S11	R CUT OFF	0 - 255	30	---	---	---	---	---	---	---
S12	G CUT OFF	0 - 255	30	---	---	---	---	---	---	---
S13	B CUT OFF	0 - 255	30	---	---	---	---	---	---	---
S14	R DRIVE	0 - 127	64	---	---	---	---	---	---	---
S15	B DRIVE	0 - 127	64	---	---	---	---	---	---	---

No.	Setting item	Variable range	Initial setting value							
			AV-32F476/Y AV-32F476/Z							
			RF / EXTERNAL (S / COMPOSITE)				EXTERNAL (COMPONENT)			
			STANDARD		THEATER		STANDARD		THEATER	
			LOW	HIGH	LOW	HIGH	LOW	HIGH	LOW	HIGH
S16	R CUT +-	-128 - +127	---	±0	±0	±0	±0	---	---	---
S17	G CUT +-	-128 - +127	---	±0	±0	±0	±0	---	---	---
S18	B CUT +-	-128 - +127	---	±0	±0	±0	±0	---	---	---
S19	R DRV +-	-128 - +127	---	+5	+13	+7	±0	---	---	---
S20	B DRV +-	-128 - +127	---	+6	-25	-9	±0	---	---	---
S21	NTSC MAT	0 - 3	3	3	1	1	2	2	1	1
S22	BLACK ST	0 - 3	2	---	2	---	---	---	---	---
S23	DC REST	0 - 1	1	---	1	---	---	---	---	---
S24	DCRSW	0 - 1	1	---	1	---	---	---	---	---

No.	Setting item	Variable range	Initial setting value		
			RF	EXTERNAL (S / COMPOSITE)	EXTERNAL (COMPONENT)
S25	ASSY SHRP	0 - 7	4	4	4
S26	BPF FO	0 - 1	0	0	---
S27	KILR OFF	0 - 1	0	0	---
S28	KILR SEN	0 - 1	1	1	---

No.	Setting item	Variable range	Initial setting value	
			AV-27F476/R AV-27F476/S	AV-32F476/Y AV-32F476/Z
S29	RGB MUTE	0 - 1	0	0
S30	BLUE B	0 - 1	0	0
S31	VIDEO SW	0 - 3	3	3
S32	CMP ABCL	0 - 1	0	0
S33	OSD ABL	0 - 1	0	0
S34	OSD CONT	0 - 63	7	8
S35	SUB CONT	0 - 15	5	5
S36	ABL GAIN	0 - 3	0	0
S37	ABL PNT	0 - 3	3	3
S38	Y GAMMA	0 - 3	1	1
S39	Y MUTE	0 - 1	0	0
S40	SVM GAIN	0 - 3	3	3
S41	SVM PH	0 - 3	1	2
S42	WPL	0 - 1	0	0
S43	COL GMM	0 - 1	0	0
S44	V1 GAIN	0 - 7	4	4
S46	VMOFF DE	-128 - +127	3	3
S47	APC CLK	0 - 1	1	1
S48	PIP ADJ	0 - 15	4	8

#### 4.7.2 [2. DEF (D)]

No.	Setting item	Variable range	Initial setting value								
			AV-27F476/R AV-27F476/S			AV-32F476/Y			AV-32F476/Z		
			RF		EXTERNAL	RF		EXTERNAL	RF		EXTERNAL
			4 : 3	16 : 9	4 : 3	4 : 3	16 : 9	4 : 3	4 : 3	16 : 9	4 : 3
D01	V FREQ	0 - 3	0	0	3	0	0	3	0	0	3
D02	AFC GAIN	0 - 3	0	0	2	0	0	2	0	0	2
D03	H POSI	0 - 31	21	---	21	19	---	19	19	---	19
D04	H POSI+-	-128 - +127	---	0	---	---	0	---	---	0	---
D05	V PHASE	0 - 7	0	---	0	0	---	0	0	---	0
D06	V PH+-	-128 - +127	---	0	---	---	0	---	---	0	---
D07	V SIZE	0 - 127	105	---	105	58	---	58	45	---	45
D08	V SIZE+-	-128 - +127	---	-30	---	---	-30	---	---	-30	---
D09	V CENTER	0 - 63	32	---	32	32	---	32	32	---	32
D10	V CENT+-	-128 - +127	---	0	---	---	0	---	---	0	---
D11	V S CORR	0 - 15	7	---	7	9	---	9	8	---	8
D12	V S CO+-	-128 - +127	---	0	---	---	0	---	---	0	---
D13	V LIN	0 - 15	10	---	10	10	---	10	8	---	8
D14	V LIN+-	-128 - +127	---	0	---	---	0	---	---	0	---
D15	H SIZE	0 - 63	38	---	38	49	---	49	28	---	28
D16	H SIZE+-	-128 - +127	---	0	---	---	0	---	---	0	---
D17	WVMT TOP	0 - 3	0	1	0	0	1	0	0	1	0
D18	WVMT BTM	0 - 3	0	1	0	0	1	0	0	1	0
D19	EWCR TOP	0 - 31	14	---	14	14	---	14	11	---	11
D20	EWCR T+-	-128 - +127	---	0	---	---	0	---	---	0	---
D21	EWCR BTM	0 - 31	13	---	13	16	---	16	11	---	11
D22	EWCR B+-	-128 - +127	---	0	---	---	0	---	---	0	---
D23	EW PARA	0 - 63	42	---	42	35	---	35	31	---	31
D24	EW PARA+-	-128 - +127	---	-15	---	---	-16	---	---	-16	---
D25	V EHT	0 - 7	0	---	0	0	---	0	0	---	0
D26	V EHT+-	-128 - +127	---	0	---	---	0	---	---	0	---
D27	H EHT	0 - 7	0	---	0	0	---	0	0	---	0
D28	H EHT+-	-128 - +127	---	0	---	---	0	---	---	0	---
D29	TRAPEZ	0 - 63	30	---	30	34	---	34	36	---	36
D30	TRAPEZ+-	-128 - +127	---	0	---	---	0	---	---	0	---
D31	V AGC	0 - 1	0	0	0	0	0	0	0	0	0
D32	BLANK SW	0 - 1	0	0	0	0	0	0	0	0	0
D33	VRMP BI	0 - 1	0	0	0	0	0	0	0	0	0

#### 4.7.3 [3. SOUND(A)]

No.	Setting item	Variable range	Initial setting value
A01	IN LEVEL	0 - 15	9
A02	LOW SEP	0 - 63	41
A03	HI SEP	0 - 63	36
A04	SAPC	0 - 1	0
A05	BBE BASS	-128 - +127	-2
A06	BBE TRE	-128 - +127	-2
A07	AHS MVE	-128 - +127	±0
A08	AHS MSC	-128 - +127	±0

#### 4.7.4 [4. OTHERS(F)] [Do Not adjust : All fixed]

No.	Setting item	Variable range	Initial setting value		Initial setting value	
			AV-27F476/R	AV-27F476/S	AV-32F476/Y	AV-32F476/Z
F01	OSD POSI	0 - 255	39	39	42	42
F02	OSD FREQ	0 - 255	90	90	90	90
F03	CCD POSI	0 - 255	42	42	48	48
F04	CCD FREQ	0 - 255	91	91	93	93
F05	CCD CONT	0 - 63	4	4	4	4
F06	PUR WBCK	0 - 1	0	0	0	0
F07	PUR CONT	0 - 63	2	2	2	2
F08	CCD PCHK	0 - 1	1	1	1	1
F09	VMOFF	0 - 1	0	0	0	0
F10	VNR CHK	0 - 255	3	3	3	3
F11	VCSN TM	0 - 255	5	5	5	5
F12	VM DAT A	-128 - +127	+8	+127	+8	+8
F13	VM DAT B	-128 - +127	+8	+8	-8	-8
F14	VM DAT C	-128 - +127	-20	-8	-20	-20
F15	VM DAT D	-128 - +127	-32	-20	-32	-32
F16	VM DAT E	0 - 1	1	1	1	1
F17	XDSID TM	0 - 255	15	15	15	15
F18	FM TRAP	0 - 1	0	0	0	0

**4.7.5 [5. 3L Y/C(LYC)] [Do not adjust : All fixed]**

No.	Setting item	Variable range	Initial setting value
LYC01	MODE	0 - 7	4
LYC02	VENH	0 - 7	1
LYC03	PDSOFF	0 - 1	0
LYC04	CB	0 - 1	0
LYC05	VNLR	0 - 15	2
LYC06	GSEL0	0 - 1	0
LYC07	GSEL1	0 - 1	1
LYC08	COR	0 - 3	0
LYC09	TRAP	0 - 1	1
LYC10	CHTRAP	0 - 1	0
LYC11	CBPF	0 - 1	0
LYC12	ENHOFF	0 - 1	0


**4.7.6 [12. SYSTEM(SYS)] [Do not adjust : All fixed]**

No.	Setting item	Variable range	Initial setting value
SYS01	VIDEO IN	0 - 4	3
SYS02	VSM	0 - 1	1
SYS03	CLR TEMP	0 - 1	1
SYS04	THEATER	0 - 1	1
SYS05	THEA PRO	0 - 1	1
SYS06	GAME MD	0 - 1	0
SYS07	AHS	0 - 1	0
SYS08	HYPER SR	0 - 1	1
SYS09	BBE	0 - 1	1
SYS10	S SOUND	0 - 1	1
SYS11	16:9 MD	0 - 3	1
SYS12	S CCD	0 - 1	1
SYS13	ID DISP	0 - 1	1
SYS14	CH LAB	0 - 1	1
SYS15	V LAB	0 - 1	1
SYS16	W CLOCK	0 - 1	1
SYS17	PIM	0 - 1	1
SYS18	PURITY	0 - 1	0
SYS19	VOL MUTE	0 - 1	1
SYS20	VCHIP	0 - 1	1
SYS21	VCHIP CA	0 - 1	1
SYS22	CCD	0 - 1	1
SYS23	HYPSCAN	0 - 1	1
SYS24	JVC LOGO	0 - 1	1
SYS25	PANORAMA	0 - 1	0

## 4.8 ADJUSTMENT PROCEDURE

### 4.8.1 CHECK ITEM


Item	Measuring instrument	Test point	Adjustment part	Description
<b>B1 VOLTAGE</b>	DC voltmeter	S1 Connector 1-pin : TP-E 5-pin : TP-91B [MAIN PWB]		(1) Receive the black and white signal. (color off) (2) Connect the DC voltmeter to the 1-pin and 5-pin of <b>S1 connector</b> . (3) Confirm that the voltage is <b>DC134.5V±2V</b> .
<b>HIGH VOLTAGE HOLD DOWN</b>	Resistor (22.0kΩ, 1/4W)	S1 connector 2-pin : X-RAY2 3-pin : X-RAY1 [MAIN PWB]		<ul style="list-style-type: none"> <li>After repairing the high voltage hold down circuit. This circuit shall be checked to operate correctly.</li> </ul> (1) Turn the power switch to on. (2) Refer to the figure, connect the resistor between <b>S1 connector</b> 2-pin and 3-pin. (3) Make sure that the screen picture disappears. (4) Disconnect the power plug. (5) Remove the resistor. (6) Again connect the power plug. (7) Turn the power switch to on. (8) Make sure that the normal picture is displayed on the screen.



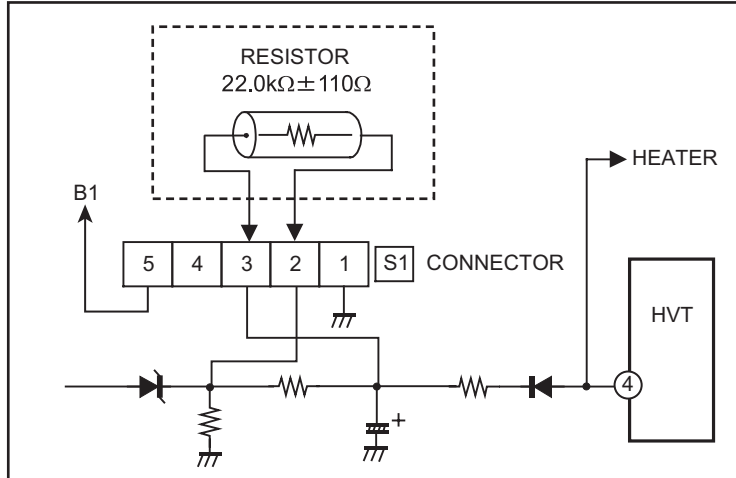


### 4.8.2 FOCUS

Item	Measuring instrument	Test point	Adjustment part	Description
<b>FOCUS</b>	Signal generator		FOCUS VR [In HVT]	(1) Receive the crosshatch signal. (2) While watching at the screen, adjust the <b>FOCUS VR</b> to the vertical and horizontal lines will be thinnest and sharpest center horizontal line. (3) Make sure that the picture is in focus even when the screen gets darkened.

### 4.8.3 DEFLECTION CIRCUIT

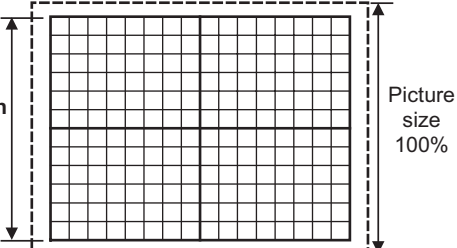Item	Measuring instrument	Test point	Adjustment part	Description
V. SIZE / V. POSITION (4:3)	Signal generator  Remote control unit		[2.DEF (D)] D05: V PHASE D07: V SIZE D11: VS CORR D13: V LIN	(1) Receive the crosshatch signal. (2) Select <b>2.DEF(D)</b> from the SERVICE MODE. (3) Select < <b>D05</b> > (V PHASE). (4) Set the initial setting of < <b>D05</b> >. (5) Adjust V. CENTER SW to agree the vertical center with display center. (6) Select < <b>D07</b> > (V SIZE). (7) Adjust < <b>D07</b> > to the vertical screen size become setting value is <b>92%</b> .
		V. CENTER SW (S1421) [MAIN PWB]	<b>NOTE:</b> <ul style="list-style-type: none"><li>• Bottom is to be located within the <b>85%-95%</b> range.</li><li>• When vertical linearity is not even, adjust &lt; <b>D13</b> &gt; (V LIN) and &lt; <b>D11</b> &gt; (VS CORR) to vertical linearity</li></ul>	

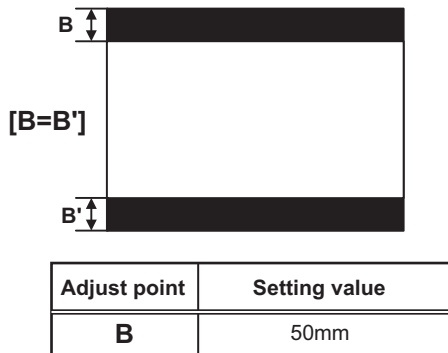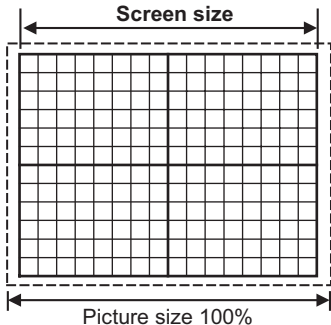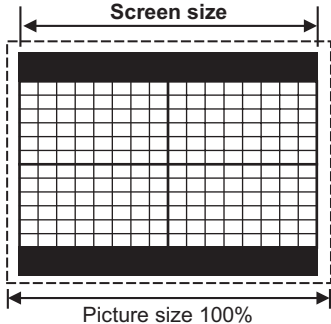Item	Measuring instrument	Test point	Adjustment part	Description
V. SIZE / V. POSITION (16:9)	Signal generator  Remote control unit		[2.DEF (D)] D08: V. SIZE+ D14: V. LIN+  	<ul style="list-style-type: none"><li>V. SIZE / V. POSITION (4:3) adjustment should be finished.</li><li>(1) Receive a black and white signal (color off).</li><li>(2) Select 16:9 mode.</li><li>(3) Confirm that the width of V. BLANKING is equal to adjustment value <b>(B)</b>.</li><li>(4) If the value <b>(B)</b> is not correct, select <b>2.DEF(D)</b> from the SERVICE MODE.</li><li>(5) Adjust <b>&lt; D08 &gt;</b> (V. SIZE+) and <b>&lt; D14 &gt;</b> (V. LIN+) to be same to adjustment value <b>(B)</b>.</li></ul> <p><b>NOTE :</b></p> <ul style="list-style-type: none"><li>When you change the VERTICAL adjustment value of the regular mode (4:3), review the adjustment of 16:9 mode again.</li></ul>
H. SIZE / H. POSITION / SIDE PIN (4:3)	Signal generator  Remote control unit		[2.DEF (D)] D03: H POSI D15: H SIZE D23: EW PARA D19: EWCR TOP D21: EWCR BTM  	<ul style="list-style-type: none"><li>(1) Receive the crosshatch signal.</li><li>(2) Select <b>2.DEF(D)</b> from the SERVICE MODE.</li><li>(3) Select <b>&lt; D03 &gt;</b> (H POSI).</li><li>(4) Adjust <b>&lt; D03 &gt;</b> to the left width and right width of the crosshatch screen becomes equal.</li><li>(5) Select <b>&lt; D15 &gt;</b> (H SIZE).</li><li>(6) Adjust <b>&lt; D15 &gt;</b> to the horizontal screen size become setting value is <b>90%</b>.</li><li>(7) Select <b>&lt; D23 &gt;</b> (EW PARA).</li><li>(8) Adjust <b>&lt; D23 &gt;</b> to vertical line at both side to become straight.</li><li>(9) If it is necessary, readjust step 3 to 8.</li></ul> <p><b>NOTE:</b></p> <p>If it is not straight at the vertical upper and bottom corner line, adjust the upper and bottom corner pin by <b>&lt; D19 &gt;</b> (EWCR TOP) and <b>&lt; D21 &gt;</b> (EWCR BTM).</p>
H. POSITION / H. SIZE / SIDE PIN (16:9)	Signal generator  Remote control unit		[2.DEF (D)] D16: H SIZE+ D04: H POSI+ D24: EW PARA+ D20: EWCR T+ D22: EWCR B+  	<ul style="list-style-type: none"><li>V. SIZE / V. POSITION adjustment should be finished.</li><li>H. SIZE / H. POSITION / SIDE PIN adjustment should be finished. (Regular size(4:3)).</li><li>(1) Receive the crosshatch signal.</li><li>(2) Select 16:9 mode.</li><li>(3) Select <b>2.DEF(D)</b> from the SERVICE MODE.</li><li>(4) Confirm both sides of crosshatch to be the adjustment value <b>90%</b>.</li><li>(5) If the value is not correct, adjust <b>&lt; D16 &gt;</b> (H SIZE+) and <b>&lt; D04 &gt;</b> (H POSI+) to the horizontal screen size become setting value is <b>90%</b>.</li><li>(6) Confirm the second vertical line from left to right to be straight.</li><li>(7) If it is not straight, adjust to be straight by <b>&lt; D24 &gt;</b> (EW PARA+), <b>&lt; D20 &gt;</b> (EWCR T+) and <b>&lt; D22 &gt;</b> (EWCR B+).</li></ul> <p><b>NOTE :</b></p> <ul style="list-style-type: none"><li>Review the adjustment of 16:9 mode again when you change the SIDE PIN adjustment value of regular (4:3) mode.</li></ul>




#### 4.8.4 VIDEO CIRCUIT

Item	Measuring instrument	Test point	Adjustment part	Description
<b>WHITE BALANCE (LOW LIGHT)</b>	Signal generator  Remote control unit		[1.V/C (S)] S01: BRIGHT S11: R CUTOFF S12: G CUTOFF S13: B CUTOFF	<ol style="list-style-type: none"> <li>(1) Receive the black and white signal ( color off ).</li> <li>(2) Select the <b>1.V/C (S)</b> from the SERVICE MODE.</li> <li>(3) Confirm the initial setting value of <b>&lt; S11 &gt;</b> (R CUTOFF), <b>&lt; S12 &gt;</b> (G CUTOFF), <b>&lt; S13 &gt;</b> (B CUTOFF) and <b>&lt; S01 &gt;</b> (BRIGHT).</li> <li>(4) Return to the main menu in SERVICE MODE.</li> <li>(5) Select the <b>7.LOW LIGHT</b> from the SERVICE MODE.</li> <li>(6) Display a single horizontal line by pressing the <b>[1]</b> key.</li> <li>(7) Turn the SCREEN VR all the way to the left.</li> <li>(8) Turn the SCREEN VR gradually to the right from the left until either one of the red, blue or green colors appears faintly.</li> <li>(9) Adjust the two colors which did not appear until the single horizontal line that is displayed becomes white using the <b>[4]</b> to <b>[9]</b> keys.</li> <li>(10) Turn the SCREEN VR until the single horizontal line is displayed faintly.</li> <li>(11) Press the <b>[2]</b> key to cancel the single horizontal line mode.</li> <li>(12) Return to the main menu in SERVICE MODE.</li> <li>(13) Select the <b>1.V/C (S)</b> from the SERVICE MODE.</li> <li>(14) Adjust the BRIGHT level to become the black component shines white slightly by <b>&lt; S01 &gt;</b>.</li> <li>(15) Confirm that whether the color ingredient of R, G, or B is visible to the black component, which shines white slightly.</li> <li>(16) When the color ingredient can be seen, two colors other than a visible color are adjusted, and it is made to look white.</li> <li>(17) Return the value of <b>&lt; S01 &gt;</b> to initial setting value.</li> </ol> <ul style="list-style-type: none"> <li>• The <b>[3]</b> (EXIT) key is the cancel key for the WHITE BALANCE.</li> </ul>
<div style="border: 1px solid black; padding: 10px; text-align: center;"> <b>REMOTE CONTROL UNIT</b> </div> <div style="display: flex; justify-content: space-around; margin-top: 10px;"> <div>H.LINE ON <b>(1)</b></div> <div>H.LINE OFF <b>(2)</b></div> <div>EXIT <b>(3)</b></div> </div> <div style="display: flex; justify-content: space-around; margin-top: 10px;"> <div>R CUTOFF▲ <b>(4)</b></div> <div>G CUTOFF▲ <b>(5)</b></div> <div>B CUTOFF▲ <b>(6)</b></div> </div> <div style="display: flex; justify-content: space-around; margin-top: 10px;"> <div>R CUTOFF▼ <b>(7)</b></div> <div>G CUTOFF▼ <b>(8)</b></div> <div>B CUTOFF▼ <b>(9)</b></div> </div>			[7.LOW LIGHT]  SCREEN VR [in HVT]	
<b>WHITE BALANCE (HIGH LIGHT)</b>	Signal generator  Remote control unit		[1.V/C (S)] S14: R DRIVE S15: B DRIVE	<ol style="list-style-type: none"> <li>(1) Receive the black and white signal (color off).</li> <li>(2) Select the <b>1.V/C (S)</b> from the SERVICE MODE.</li> <li>(3) Set the initial setting value of <b>&lt; S14 &gt;</b> (R DRIVE) and <b>&lt; S15 &gt;</b> (B DRIVE).</li> <li>(4) Return to the main menu in SERVICE MODE.</li> <li>(5) Select the <b>8.HIGH LIGHT</b> from the SERVICE MODE.</li> <li>(6) Adjust the screen until it becomes white using the <b>[4]</b>, <b>[6]</b>, <b>[7]</b> and <b>[9]</b> keys.</li> </ol> <ul style="list-style-type: none"> <li>• The <b>[3]</b> (EXIT) key is the cancel key for the WHITE BALANCE.</li> </ul>
<div style="border: 1px solid black; padding: 10px; text-align: center;"> <b>REMOTE CONTROL UNIT</b> </div> <div style="display: flex; justify-content: space-around; margin-top: 10px;"> <div><b>(1)</b></div> <div><b>(2)</b></div> <div>EXIT <b>(3)</b></div> </div> <div style="display: flex; justify-content: space-around; margin-top: 10px;"> <div>R DRIVE▲ <b>(4)</b></div> <div><b>(5)</b></div> <div>B DRIVE▲ <b>(6)</b></div> </div> <div style="display: flex; justify-content: space-around; margin-top: 10px;"> <div>R DRIVE▼ <b>(7)</b></div> <div><b>(8)</b></div> <div>B DRIVE▼ <b>(9)</b></div> </div>			[8.HIGH LIHGT]	
<b>SUB BRIGHT</b>	Remote control unit		[1.V/C (S)] S01: BRIGHT	<ol style="list-style-type: none"> <li>(1) Receive any broadcast.</li> <li>(2) Select the <b>1.V/C (S)</b> from the SERVICE MODE.</li> <li>(3) Select <b>&lt; S01 &gt;</b> (BRIGHT).</li> <li>(4) Set the initial setting value of <b>&lt; S01 &gt;</b>.</li> <li>(5) If the brightness is not the best with the initial setting value, make fine adjustment of <b>&lt; S01 &gt;</b> until you get the optimum brightness.</li> </ol>

Item	Measuring instrument	Test point	Adjustment part	Description
<b>SUB CONTRAST</b>	Remote control unit		[1.V/C (S)] S02: PICTURE	(1) Receive any broadcast. (2) Select the <b>1.V/C (S)</b> from the SERVICE MODE. (3) Select <b>&lt; S02 &gt;</b> (PICTURE). (4) Set the initial setting value of <b>&lt; S02 &gt;</b> . (5) If the contrast is not the best with the initial setting value, make fine adjustment of the <b>&lt; S02 &gt;</b> until you get the optimum contrast.

#### 4.8.5 MTS CIRCUIT

Item	Measuring instrument	Test point	Adjustment part	Description
<b>MTS INPUT LEVEL</b>	Remote control unit		[3.SOUND (A)] A01: IN LEVEL	(1) Receive any broadcast. (2) Select the <b>3.SOUND (A)</b> from the SERVICE MODE. (3) Select the <b>&lt; A01 &gt;</b> (IN LEVEL). (4) Set the initial setting value of <b>&lt; A01 &gt;</b> .
<b>MTS SEPARATION</b>	TV audio multiplex signal generator  Oscilloscope  Remote control unit	R OUT L OUT [AUDIO OUT]	[3.SOUND (A)] A02: LOW SEP. A03: HI SEP.	(1) Input the stereo L signal (300 Hz) from the TV audio multiplex signal generator to the antenna terminal. (2) Connect an oscilloscope to R OUT pin of the AUDIO OUT, and display one cycle portion of the 300 Hz signal. (3) Select the <b>3.SOUND (A)</b> from the SERVICE MODE. (4) Select the <b>&lt; A02 &gt;</b> (LOW SEP.). (5) Set the initial setting value of <b>&lt; A02 &gt;</b> . (6) Adjust the <b>&lt; A02 &gt;</b> so that the stroke element of the 300Hz signal will become minimum. (7) Change the connection of the oscilloscope to L OUT pin of the AUDIO OUT, and enlarge the voltage axis. (8) Change the signal to 3 kHz, and similarly adjust <b>&lt; A03 &gt;</b> (HI SEP.).

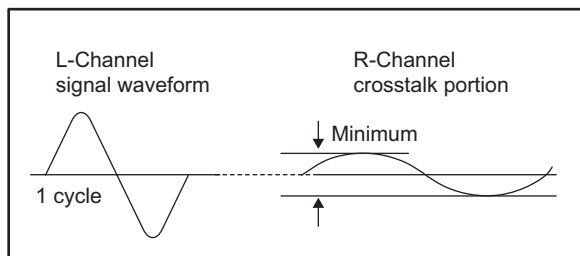

## **SECTION 5**

### **TROUBLESHOOTING**

This service manual does not describe TROUBLESHOOTING.



Victor Company of Japan, Limited  
AV & MULTIMEDIA COMPANY VIDEO DISPLAY CATEGORY 12, 3-chome, Moriya-cho, kanagawa-ku, Yokohama, kanagawa-prefecture, 221-8528, Japan

(No.YA243)



Printed in Japan  
VPT

# PARTS LIST

## CAUTION

- The parts identified by the  $\Delta$  symbol are important for the safety . Whenever replacing these parts, be sure to use specified ones to secure the safety.
- The parts not indicated in this Parts List and those which are filled with lines --- in the Parts No. columns will not be supplied.
- P.W. BOARD Ass'y will not be supplied, but those which are filled with the Parts No. in the Parts No. columns will be supplied.

### ABBREVIATIONS OF RESISTORS, CAPACITORS AND TOLERANCES

RESISTORS		CAPACITORS	
CR	Carbon Resistor	C CAP.	Ceramic Capacitor
FR	Fusible Resistor	E CAP.	Electrolytic Capacitor
PR	Plate Resistor	M CAP.	Mylar Capacitor
VR	Variable Resistor	CH CAP.	Chip Capacitor
HV R	High Voltage Resistor	HV CAP.	High Voltage Capacitor
MF R	Metal Film Resistor	MF CAP.	Metalized Film Capacitor
MG R	Metal Glazed Resistor	MM CAP.	Metalized Mylar Capacitor
MP R	Metal Plate Resistor	MP CAP.	Metalized Polystyrol Capacitor
OM R	Metal Oxide Film Resistor	PP CAP.	Polypropylene Capacitor
CMF R	Coating Metal Film Resistor	PS CAP.	Polystyrol Capacitor
UNF R	Non-Flammable Resistor	TF CAP.	Thin Film Capacitor
CH V R	Chip Variable Resistor	MPP CAP.	Metalized Polypropylene Capacitor
CH MG R	Chip Metal Glazed Resistor	TAN. CAP.	Tantalum Capacitor
COMP. R	Composition Resistor	CH C CAP.	Chip Ceramic Capacitor
LPTC R	Linear Positive Temperature Coefficient Resistor	BP E CAP.	Bi-Polar Electrolytic Capacitor
		CH AL E CAP.	Chip Aluminum Electrolytic Capacitor
		CH AL BP CAP.	Chip Aluminum Bi-Polar Capacitor
		CH TAN. E CAP.	Chip Tantalum Electrolytic Capacitor
		CH AL BP E CAP.	Chip Tantalum Bi-Polar Electrolytic Capacitor

RESISTORS									
F	G	J	K	M	N	R	H	Z	P
±1%	±2%	±5%	±10%	±20%	±30%	+30% -10%	+50% -10%	+80% -20%	+100% -0%

# CONTENTS

<b>USING P.W. BOARD &amp; REMOTE CONTROL UNIT .....</b>	<b>3-3</b>
<b>EXPLODED VIEW PARTS LIST -1 .....</b>	<b>3-3</b>
<b>EXPLODED VIEW -1 .....</b>	<b>3-3</b>
<b>EXPLODED VIEW PARTS LIST -2 .....</b>	<b>3-4</b>
<b>EXPLODED VIEW -2 .....</b>	<b>3-5</b>
<b>PRINTED WIRING BOARD PARTS LIST [AV-27F476/R] .....</b>	<b>3-6</b>
MAIN P.W. BOARD ASS'Y (SGJ-1580A-M2) .....	3-6
CRT SOCKET P.W. BOARD ASS'Y (SGJ-3523A-M2) .....	3-8
AV SELECTOR P.W. BOARD ASS'Y (SGJ-5521A-M2) .....	3-9
FRONT CONTROL P.W. BOARD ASS'Y (SGJ-6521A-M2) .....	3-10
LED & POWER SW P.W. BOARD ASS'Y (SGJ-7521A-M2) .....	3-10
<b>PRINTED WIRING BOARD PARTS LIST [AV-27F476/S] .....</b>	<b>3-11</b>
MAIN P.W. BOARD ASS'Y (SGJ-1579A-M2) .....	3-11
CRT SOCKET P.W. BOARD ASS'Y (SGJ-3523A-M2) .....	3-13
AV SELECTOR P.W. BOARD ASS'Y (SGJ-5521A-M2) .....	3-13
FRONT CONTROL P.W. BOARD ASS'Y (SGJ-6521A-M2) .....	3-13
LED & POWER SW P.W. BOARD ASS'Y (SGJ-7521A-M2) .....	3-13
<b>PRINTED WIRING BOARD PARTS LIST [AV-32F476/Y] .....</b>	<b>3-14</b>
MAIN P.W. BOARD ASS'Y (SGJ-1572A-M2) .....	3-14
CRT SOCKET P.W. BOARD ASS'Y (SGJ-3521A-M2) .....	3-16
AV SELECTOR P.W. BOARD ASS'Y (SGJ-5521A-M2) .....	3-17
FRONT CONTROL P.W. BOARD ASS'Y (SGJ-6521A-M2) .....	3-17
LED & POWER SW P.W. BOARD ASS'Y (SGJ-7521A-M2) .....	3-17
<b>PRINTED WIRING BOARD PARTS LIST [AV-32F476/Z] .....</b>	<b>3-18</b>
MAIN P.W. BOARD ASS'Y (SGJ-1575A-M2) .....	3-18
CRT SOCKET P.W. BOARD ASS'Y (SGJ-3522A-M2) .....	3-20
AV SELECTOR P.W. BOARD ASS'Y (SGJ-5521A-M2) .....	3-21
FRONT CONTROL P.W. BOARD ASS'Y (SGJ-6521A-M2) .....	3-21
LED & POWER SW P.W. BOARD ASS'Y (SGJ-7521A-M2) .....	3-21
<b>REMOTE CONTROL UNIT PARTS LIST (RM-C1258G-1H) .....</b>	<b>3-22</b>
<b>PACKING .....</b>	<b>3-22</b>
<b>PACKING PARTS LIST .....</b>	<b>3-22</b>


## USING P.W. BOARD & REMOTE CONTROL UNIT

P.W.B ASS'Y name	AV-27F476/R	AV-27F476/S	AV-32F476/Y	AV-32F476/Z
MAIN PWB	SGJ-1580A-M2	SGJ-1579A-M2	SGJ-1572A-M2	SGJ-1575A-M2
CRT SOCKET PWB	SGJ-3523A-M2	←	SGJ-3521A-M2	SGJ-3522A-M2
AV SELECTOR PWB	SGJ-5521A-M2	←	←	←
FRONT CONTROL PWB	SGJ-6521A-M2	←	←	←
LED & POWER SWICH PWB	SGJ-7521A-M2	←	←	←
REMOTE CONTROL UNIT	RM-C1258G-1H	←	←	←

## EXPLODED VIEW PARTS LIST -1

△ Ref.No.	Part No.	Part Name	Description	Local
1	LC41193-003A-C	JVC MARK		
2	LC32242-001A-A	RC LENS		
△ 100	LC11556-003B-A	FRONT CABINET ASSY	Inc.No.101-105	AV-27F476/R,AV-27F476/S
△ 100	LC11531-004B-A	FRONT CABINET ASSY	Inc.No.101-105	AV-32F476/Y,AV-32F476/Z
101	LC21239-002A-A	DOOR		
102	CM48229-00A-C	DOOR LATCH		
△ 103	LC32240-001A-A	POWER KNOB		
104	CM36481-002A-A	SPRING		
105	LC32241-001B-A	OPERATION SHEET		

## EXPLODED VIEW -1

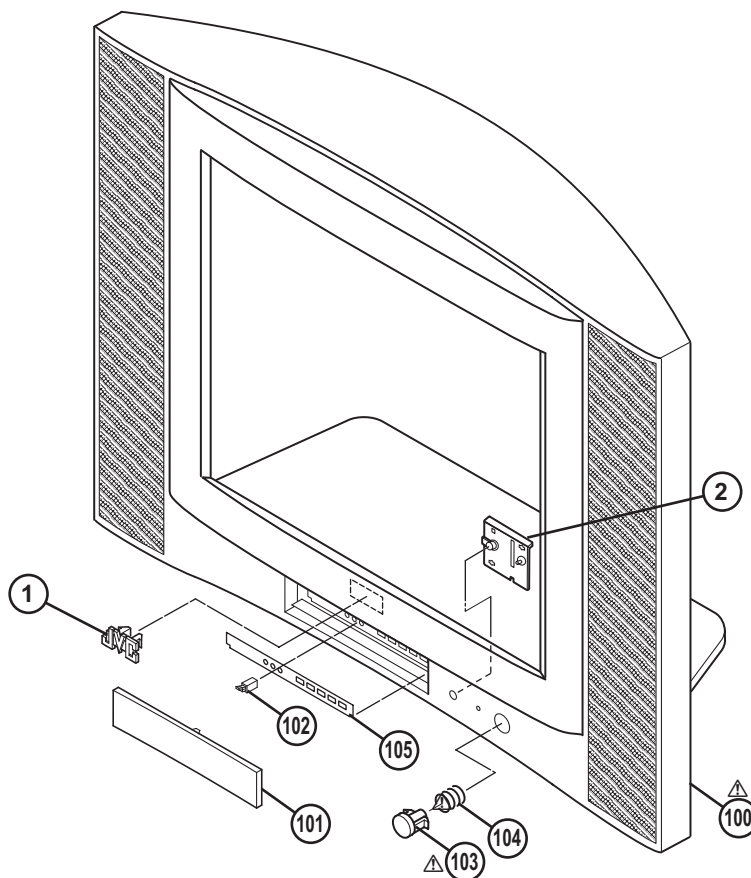


# EXPLODED VIEW PARTS LIST -2

△	Ref.No.	Part No.	Part Name	Description	Local
△	V01	A68ELH021X201	ITC	Inc.DY/PC MAGNET/WEDGE	AV-27F476/R
△	V01	A68QCP693X003	ITC	Inc.DY/PC MAGNET/WEDGE	AV-27F476/S
△	V01	A80AKS90X03	ITC	Inc.DY/PC MAGNET/WEDGE	AV-32F476/Y
△	V01	A80ERF182X17	ITC	Inc.DY/PC MAGNET/WEDGE	AV-32F476/Z
△	L01	QQW0090-001	DEG COIL		AV-27F476/R,AV-27F476/S
△	L01	QQW0116-001	DEG COIL		AV-32F476/Y
△	L01	QQW0176-001	DEG COIL		AV-32F476/Z
△	T502	QQH0175-001	FB TRANSF		
	3	A48457-4-S	SPRING		
	4	WJY0016-001A	E BRAIDED ASSY		AV-27F476/R,AV-27F476/S
	4	WJY0016-002A	E-BRAIDED ASSY		AV-32F476/Y,AV-32F476/Z
	5	WJY0013-003A	E-BRAIDED ASSY		
△	6	LC21260-001B-A	CONTROL KNOB		
△	7	GQ30034-001B-A	WARNING LABEL		
△	8	LC10883-001D-A	CHASSIS BASE		
△	9	LC20899-006A-A	TERMINAL BOARD		
	10	QYSBSB3010Z	TAP SCREW	M3 x 10mm(x4)	
△	11	QMPD200-200-JC	POWER CORD(US/CA)	2m BLACK	AV-27F476/R,AV-27F476/S,AV-32F476/Z
△	12	LC20106-001D-A	POWER CORD CLAMP		
△	13	LC11555-001D-A	REAR COVER		AV-27F476/R,AV-27F476/S
△	13	LC11533-001C-A	REAR COVER		AV-32F476/Y,AV-32F476/Z
	14	QYSBSFG4016Z	TAP SCREW	M4 x 16mm(x11)	
△	15	GQ30032-001A-A	RATING LABEL		
	16	QAS0243-001	SPEAKER	SP01/SP02(x2)	
	17	LC21261-001B-A	SP HOLDER	(x2)	
	18	LC41029-002A-A	TAPPING SCREW	(x4)	AV-27F476/S,AV-32F476/Y
	18	LC41029-001B-A	TAPPING SCREW	(x4)	AV-27F476/R,AV-32F476/Z
	19	LC40226-003A-H	SPACER	(x4)	
△	30	SGJ-3523A-M2	CRT SOCKET PWB		AV-27F476/R,AV-27F476/S
△	30	SGJ-3521A-M2	CRT SOCKET PWB		AV-32F476/Y
△	30	SGJ-3522A-M2	CRT SOCKET PWB		AV-32F476/Z
△	31	SGJ-6521A-M2	FRONT CONTROL PWB		
△	32	SGJ-7521A-M2	LED & POWER SW PWB		
△	33	SGJ-5521A-M2	AV SELECTOR PWB		
△	34	SGJ-1580A-M2	MAIN PWB		AV-27F476/R
△	34	SGJ-1579A-M2	MAIN PWB		AV-27F476/S
△	34	SGJ-1572A-M2	MAIN PWB		AV-32F476/Y
△	34	SGJ-1575A-M2	MAIN PWB		AV-32F476/Z



EXPLODED VIEW -2

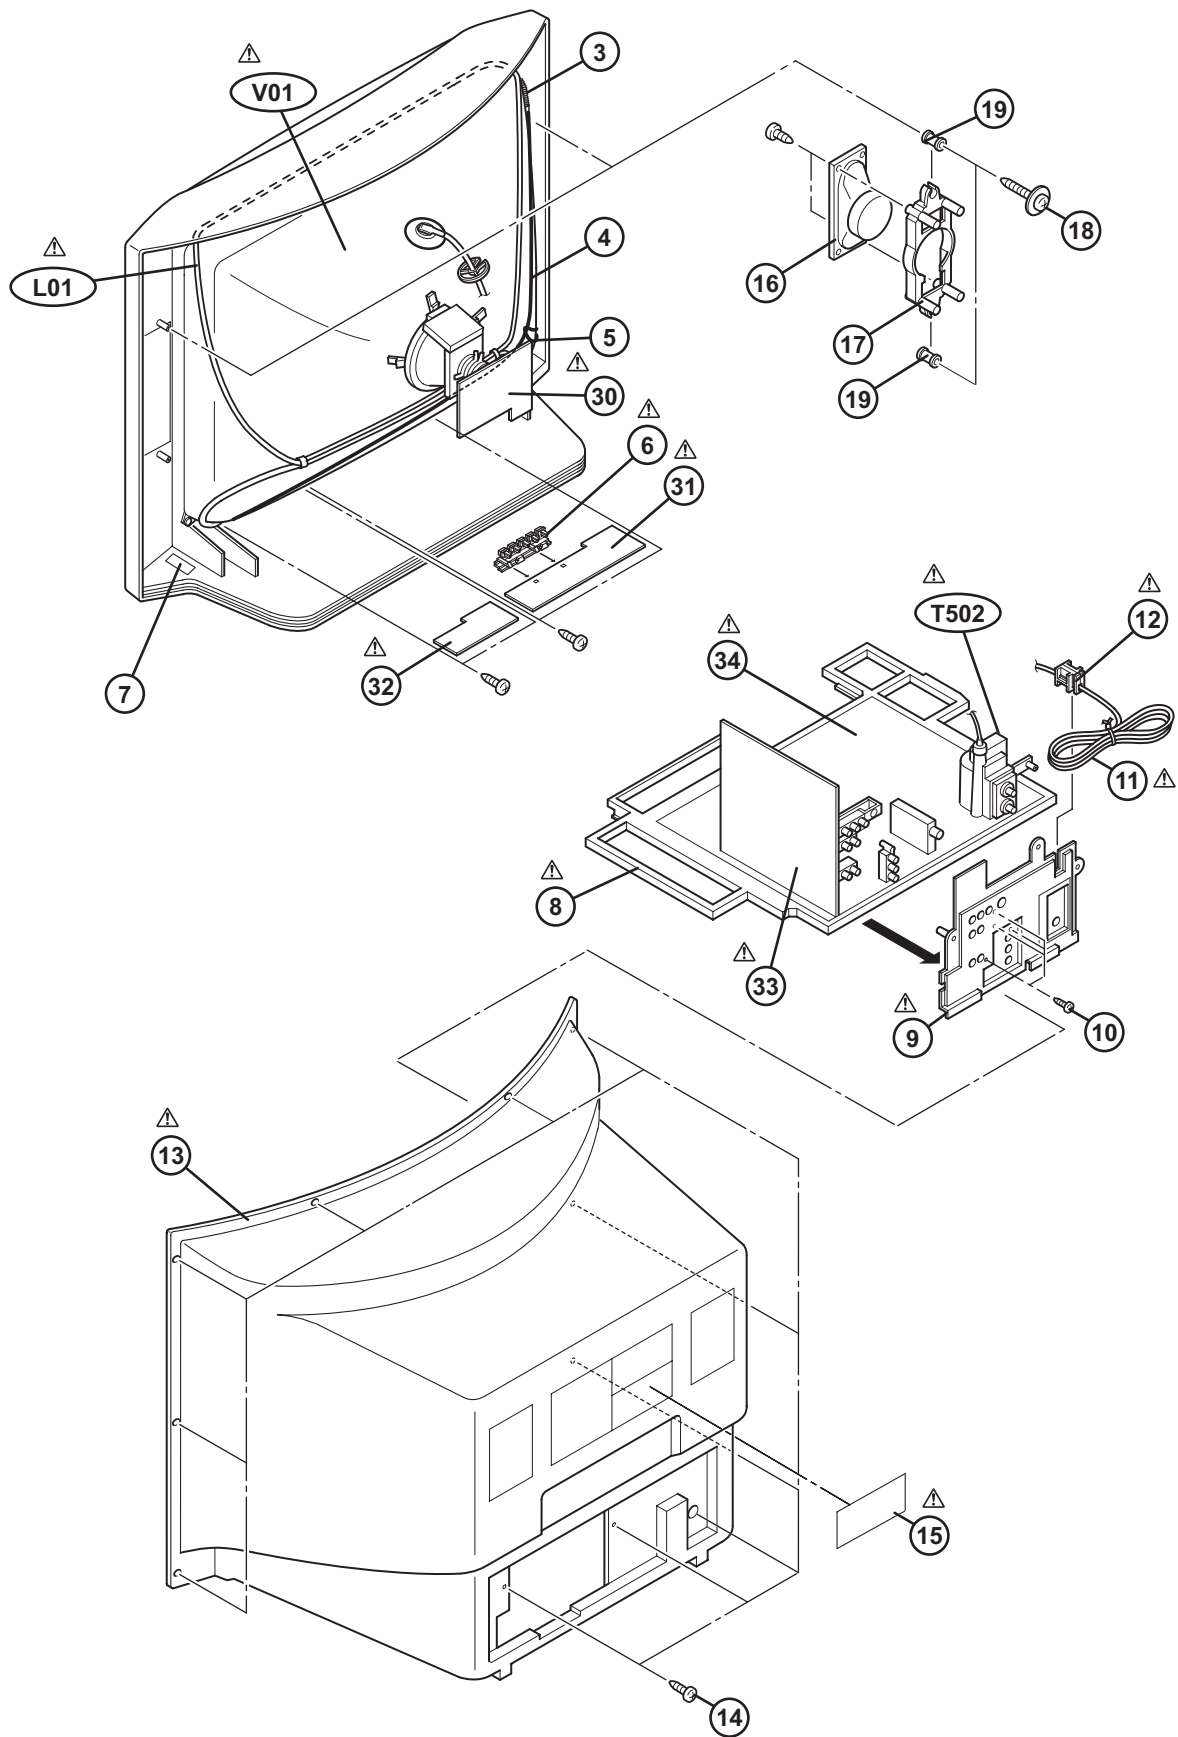

# PRINTED WIRING BOARD PARTS LIST [AV-27F476/R]

## MAIN P.W. BOARD ASS'Y (SGJ-1580A-M2)

△Ref No.	Part No.	Part Name	Description Local
IC201	TM8812CSDNG5JB4	IC	(SERVICE)
IC421	LA78041	IC	
IC621	TFA9843J/N1	IC	
IC651	NJM2150AD	IC	
IC702	ATE08-27F476R	IC	
IC703	S-80840CNY-G-T	IC	
IC704	AN78L05-T	IC	
IC852	L7809CP	IC	
IC853	L7805CP	IC	
△IC911	STR-G9626-F3	IC	
△IC921	SE135N	IC	
Q003	UN2212-X	DIGI TRANSISTOR	H. OUT
Q211	2SC3928A/QR/-X	TRANSISTOR	
Q232	2SC3928A/QR/-X	TRANSISTOR	
Q233	2SC3928A/QR/-X	TRANSISTOR	
Q352	2SC3928A/QR/-X	TRANSISTOR	
Q501	2SC4212/Z1/	TRANSISTOR	
△Q511	2SD2645-YD	POW TRANSISTOR	
△Q531	2SC2785/JH/-T	TRANSISTOR	
Q532	2SA1530A/QR/-X	TRANSISTOR	
Q541	2SA1530A/QR/-X	TRANSISTOR	
Q542	2SA1530A/QR/-X	TRANSISTOR	
Q543	2SD1267A/QP/	POW TRANSISTOR	
Q621	2SD601A/QR/-X	TRANSISTOR	
Q622	2SD601A/QR/-X	TRANSISTOR	
Q623	2SA1530A/QR/-X	TRANSISTOR	
Q625	2SD601A/QR/-X	TRANSISTOR	
Q701	2SA1530A/QR/-X	TRANSISTOR	
Q951	2SD1383K/AB/-X	SI TRANSISTOR	
Q971	2SA1208/ST/Z1-T	TRANSISTOR	
D308	MTZJ5.1B-T2	Z DIODE	
D309	MTZJ5.1B-T2	Z DIODE	
D310	MTZJ4.3A-T2	Z DIODE	
D352	MTZJ9.1C-T2	Z DIODE	
D353	1SS133-T2	SI DIODE	
D354	MTZJ3.3A-T2	Z DIODE	
D421	1N4003-T2	SI DIODE	
D422	MTZJ75-T2	Z DIODE	
D501	RH3G-F1	SI DIODE	
D502	RU3AM-LFC4	SI DIODE	
D521	RH1S-T3	SI DIODE	
D523	RGP10J-04TS-T3	SI DIODE	
D525	1SS81-T5	SI DIODE	
D526	1SS81-T5	SI DIODE	
D527	1SR124-400A-T2	SI DIODE	
D529	MTZJ9.1C-T2	Z DIODE	
△D531	MA4068N/Z1-T2	Z DIODE	
D535	1SS133-T2	SI DIODE	
D601	MTZJ9.1C-T2	Z DIODE	
D602	MTZJ9.1C-T2	Z DIODE	
D603	MTZJ9.1C-T2	Z DIODE	
D621	1SS133-T2	SI DIODE	
D623	1SS133-T2	SI DIODE	
D626	1SS133-T2	SI DIODE	
D705	1SS133-T2	SI DIODE	
D706	MTZJ5.6B-T2	Z DIODE	
D707	MTZJ5.6B-T2	Z DIODE	
D708	MTZJ5.6B-T2	Z DIODE	
D709	MTZJ5.6B-T2	Z DIODE	
△D901	GSIB460	BRIDGE DIODE	
D910	MA700A-T2	SB DIODE	
D911	RGP10J-04TS-T3	SI DIODE	
D912	RGP10J-04TS-T3	SI DIODE	
D913	1SS133-T2	SI DIODE	
D914	1SS133-T2	SI DIODE	
D915	SARS01-T2	SI DIODE	
D917	MTZJ30A-T2	Z DIODE	
D918	MTZJ5.1C-T2	Z DIODE	
D920	1SS133-T2	SI DIODE	
D931	RU4AM-LFT2	SI DIODE	
D933	RU3YX-LFC4	SI DIODE	
D935	RU3YX-LFC4	SI DIODE	
D937	RU3YX-LFC4	SI DIODE	
D941	MTZJ33A-T2	Z DIODE	
D945	MTZJ9.1B-T2	Z DIODE	
D952	1SS133-T2	SI DIODE	
D953	1SS133-T2	SI DIODE	
D954	1N4002G-T2	SI DIODE	
D955	1N4002G-T2	SI DIODE	
D956	1N4002G-T2	SI DIODE	

△Ref No.	Part No.	Part Name	Description Local
D957	1N4002G-T2	SI DIODE	
D972	MTZJ15C-T2	Z DIODE	
D973	1SS133-T2	SI DIODE	
△PC921	PC123Y22	PHOTO COUPLER	
C001	NDC31HJ-100X	C CAPACITOR	10pF 50V J
C002	QETN0JM-477Z	E CAPACITOR	470uF 6.3V M
C202	QETN1HM-105Z	E CAPACITOR	1uF 50V M
C203	NCB31HK-152X	C CAPACITOR	1500pF 50V K
C211	QENC1CM-106Z	BP E CAPACITOR	10uF 16V M
C212	NDC31HJ-100X	C CAPACITOR	10pF 50V J
C221	QETN1HM-106Z	E CAPACITOR	10uF 50V M
C222	NCF31AZ-105X	C CAPACITOR	1uF 10V Z
C223	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C233	NDC31HJ-680X	C CAPACITOR	68pF 50V J
C237	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C241	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C242	QETN1HM-225Z	E CAPACITOR	2.2uF 50V M
C243	QETN0JM-227Z	E CAPACITOR	220uF 6.3V M
C244	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C281	QFVF1HJ-474Z	MF CAPACITOR	0.47uF 50V J
C282	QETN1CM-107Z	E CAPACITOR	100uF 16V M
C283	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C284	QETN1HM-225Z	E CAPACITOR	2.2uF 50V M
C285	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C286	QETN1HM-474Z	E CAPACITOR	0.47uF 50V M
C287	QETN1CM-107Z	E CAPACITOR	100uF 16V M
C288	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C302	NCB31EK-104X	C CAPACITOR	0.1uF 25V K
C352	QETN1EM-476Z	E CAPACITOR	47uF 25V M
C354	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C360	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C391	QETN1CM-107Z	E CAPACITOR	100uF 16V M
C392	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C422	QFN32AK-102Z	M CAPACITOR	1000pF 100V K
C424	QETN1VM-107Z	E CAPACITOR	100uF 35V M
C425	QETN1VM-477Z	E CAPACITOR	470uF 35V M
C427	QETN1HM-225Z	E CAPACITOR	2.2uF 50V M
C428	QETM1EM-228	E CAPACITOR	2200uF 25V M
C431	QFLC2AK-563Z	M CAPACITOR	0.056uF 100V K
C433	QETN1EM-476Z	E CAPACITOR	47uF 25V M
C435	NCB31HK-183X	C CAPACITOR	0.018uF 50V K
C440	QCS32HJ-100Z	C CAPACITOR	10pF 500V J
C501	QCB32HK-151Z	C CAPACITOR	150pF 500V K
C502	QCB32HK-331Z	C CAPACITOR	330pF 500V K
C503	QEHR2CM-105Z	E CAPACITOR	1uF 160V M
C504	QEZO203-107	E CAPACITOR	100uF 160V M
C507	QEM61HK-475Z	E CAPACITOR	4.7uF 50V K
C508	QEM61HK-475Z	E CAPACITOR	4.7uF 50V K
△C510	QFZO200-482	MPP CAPACITOR	4800pF 1.5kV H
△C513	QFZO196-113	MPP CAPACITOR	0.011uF 1.5kV H
C514	QFP32GJ-183	PP CAPACITOR	0.018uF 400V J
C515	QFZO197-404	MPP CAPACITOR	0.4uF 250V J
C516	QCB32HK-561Z	C CAPACITOR	560pF 500V K
C521	QETN2EM-106Z	E CAPACITOR	10uF 250V M
C523	QEHR1VM-477Z	E CAPACITOR	470uF 35V M
C525	QETN1VM-107Z	E CAPACITOR	100uF 35V M
C526	QFV21HJ-824Z	MF CAPACITOR	0.82uF 50V J
C527	QFLC2AJ-103Z	M CAPACITOR	0.01uF 100V J
C531	QCB32HK-471Z	C CAPACITOR	470pF 500V K
C533	QETN1HM-106Z	E CAPACITOR	10uF 50V M
C601	NCB31CK-224X	C CAPACITOR	0.22uF 16V K
C602	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C603	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C604	QETN1HM-106Z	E CAPACITOR	10uF 50V M
C621	QETN1HM-106Z	E CAPACITOR	10uF 50V M
C622	QETN1HM-106Z	E CAPACITOR	10uF 50V M
C624	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M
C626	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M
C627	NCF21CZ-105X	C CAPACITOR	1uF 16V Z
C628	QETN1HM-226Z	E CAPACITOR	22uF 50V M
C629	NCF21CZ-105X	C CAPACITOR	1uF 16V Z
C630	QETN1EM-227Z	E CAPACITOR	220uF 25V M
C632	QETN1EM-477Z	E CAPACITOR	470uF 25V M
C633	QETN1EM-227Z	E CAPACITOR	220uF 25V M
C634	QETN1HM-106Z	E CAPACITOR	10uF 50V M
C635	QETN1HM-105Z	E CAPACITOR	1uF 50V M
C637	QETN1EM-108Z	E CAPACITOR	1000uF 25V M
C638	QETN1EM-108Z	E CAPACITOR	1000uF 25V M
C651	NCF31AZ-105X	C CAPACITOR	1uF 10V Z
C652	NCF31AZ-105X	C CAPACITOR	1uF 10V Z
C655	NCB31HK-332X	C CAPACITOR	3300pF 50V K
C656	NCB31HK-332X	C CAPACITOR	3300pF 50V K

△Ref No.	Part No.	Part Name	Description Local	△Ref No.	Part No.	Part Name	Description Local
C657	NCB31HK-333X	C CAPACITOR	0.033uF 50V K	R303	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J
C658	NCB31HK-333X	C CAPACITOR	0.033uF 50V K	R304	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C659	QETN1HM-106Z	E CAPACITOR	10uF 50V M	R305	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C660	QETN1EM-476Z	E CAPACITOR	47uF 25V M	R306	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C661	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R318	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J
C662	QETN1HM-106Z	E CAPACITOR	10uF 50V M	R319	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
C700	NCB31HK-102X	C CAPACITOR	1000pF 50V K	R354	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C701	QETN1HM-106Z	E CAPACITOR	10uF 50V M	R355	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C702	QETN1HM-106Z	E CAPACITOR	10uF 50V M	R356	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J
C703	QETN1HM-106Z	E CAPACITOR	10uF 50V M	R359	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
C704	QETN1CM-107Z	E CAPACITOR	100uF 16V M	R421	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J
C705	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R423	NRSA63J-393X	MG RESISTOR	39kΩ 1/16W J
C708	NDC31HJ-220X	C CAPACITOR	22pF 50V J	R424	NRSA63J-393X	MG RESISTOR	39kΩ 1/16W J
C709	NDC31HJ-220X	C CAPACITOR	22pF 50V J	R426	NRSA63J-183X	MG RESISTOR	18kΩ 1/16W J
C711	QETN1CM-107Z	E CAPACITOR	100uF 16V M	R427	QRT029J-1R5	MF RESISTOR	1.5Ω 2W J
C712	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R429	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J
C728	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R431	NRSA63J-152X	MG RESISTOR	1.5kΩ 1/16W J
C807	QETN1AM-477Z	E CAPACITOR	470uF 10V M	R432	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C815	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R433	NRSA63J-681X	MG RESISTOR	680Ω 1/16W J
C853	QETN1EM-227Z	E CAPACITOR	220uF 25V M	R434	QRL029J-181	OMF RESISTOR	180Ω 2W J
C854	QETN1CM-227Z	E CAPACITOR	220uF 16V M	R435	QRE121J-102Y	C RESISTOR	1kΩ 1/2W J
C856	QETN1CM-227Z	E CAPACITOR	220uF 16V M	R441	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C857	QETN0JM-477Z	E CAPACITOR	470uF 6.3V M	R501	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
△C901	QFZ9072-104	MM CAPACITOR	0.1uF AC250V K	R502	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J
△C902	QFZ9072-473	MM CAPACITOR	0.047uF AC250V K	R503	QRE121J-103Y	C RESISTOR	10kΩ 1/2W J
△C903	QFZ9072-104	MM CAPACITOR	0.1uF AC250V K	R504	QRL039J-222	OMF RESISTOR	2.2kΩ 3W J
△C905	QCZ9054-102	C CAPACITOR	1000pF AC250V Z	R505	QRL039J-182	OMF RESISTOR	1.8kΩ 3W J
C907	QE20644-567	E CAPACITOR	560uF 200V K	R511	QRE121J-220Y	C RESISTOR	22Ω 1/2W J
△C908	QCZ9054-102	C CAPACITOR	1000pF AC250V Z	R512	QRE121J-681Y	C RESISTOR	680Ω 1/2W J
C912	QCZ0340-222	C CAPACITOR	2200pF 2kV K	R516	QRZ0221-2R0	OMF RESISTOR	2Ω 7W K
C913	QFLC1HJ-471Z	M CAPACITOR	470pF 50V J	R524	NRSA63J-563X	MG RESISTOR	56kΩ 1/16W J
C914	QETN1HM-107Z	E CAPACITOR	100uF 50V M	R526	QRE121J-272Y	C RESISTOR	2.7kΩ 1/2W J
C916	NDC31HJ-331X	C CAPACITOR	330pF 50V J	R527	QRE121J-154Y	C RESISTOR	150kΩ 1/2W J
C917	NCB31HK-182X	C CAPACITOR	1800pF 50V K	R528	QRE121J-154Y	C RESISTOR	150kΩ 1/2W J
C918	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	R529	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J
C919	QFP32GJ-103	PP CAPACITOR	0.01uF 400V J	△R531	QRZ0230-391X	UNF C RESISTOR	390Ω 1/4W J
C931	QE20203-227	E CAPACITOR	220uF 160V M	R532	NRSA63J-273X	MG RESISTOR	27kΩ 1/16W J
C932	QETN1EM-108Z	E CAPACITOR	1000uF 25V M	R533	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J
C933	QETN1EM-108Z	E CAPACITOR	1000uF 25V M	R534	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J
C934	NDC31HJ-221X	C CAPACITOR	220pF 50V J	△R535	NRVA02D-272X	CMF RESISTOR	2.7kΩ 1/10W D
C935	QETN1VM-108Z	E CAPACITOR	1000uF 35V M	R536	QRE121J-470Y	C RESISTOR	47Ω 1/2W J
C937	QCZ0340-102	C CAPACITOR	1000pF 2kV K	△R537	NRVA02D-752X	CMF RESISTOR	7.5kΩ 1/10W D
C938	QETN1EM-477Z	E CAPACITOR	470uF 25V M	R538	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J
C939	QCB32HK-152Z	C CAPACITOR	1500pF 500V K	R543	QRE121J-122Y	C RESISTOR	1.2kΩ 1/2W J
C941	QCB32HK-102Z	C CAPACITOR	1000pF 500V K	R544	QRE121J-392Y	C RESISTOR	3.9kΩ 1/2W J
C942	QEHR1HM-105Z	E CAPACITOR	1uF 50V M	R545	QRE121J-822Y	C RESISTOR	8.2kΩ 1/2W J
C943	QETN1CM-108Z	E CAPACITOR	1000uF 16V M	R546	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J
C951	QETN1EM-477Z	E CAPACITOR	470uF 25V M	R547	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J
C952	QETN1CM-227Z	E CAPACITOR	220uF 16V M	R548	QRE121J-152Y	C RESISTOR	1.5kΩ 1/2W J
C971	QETN1CM-107Z	E CAPACITOR	100uF 16V M	R553	QRL039J-390	OMF RESISTOR	39Ω 3W J
C972	QETN1EM-476Z	E CAPACITOR	47uF 25V M	△R554	QRK126J-150X	UNF C RESISTOR	15Ω 1/2W J
△C997	QCZ9079-102	C CAPACITOR	1000pF AC250V M	R555	QRT029J-3R3	MF RESISTOR	3.3Ω 2W J
△C998	QCZ9074-103	C CAPACITOR	0.01uF AC250V M	R601	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J
△C999	QCZ9074-103	C CAPACITOR	0.01uF AC250V M	R602	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J
R001	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R603	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J
R002	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R621	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J
R003	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R623	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R004	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R624	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J
R008	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R626	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R010	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R627	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R201	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	R628	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R212	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J	R630	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J
R215	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	R631	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R216	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	R649	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J
R217	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R651	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J
R227	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	R652	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J
R231	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J	R653	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J
R237	NRSA63J-392X	MG RESISTOR	3.9kΩ 1/16W J	R654	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J
R238	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	R655	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R241	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	R657	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R243	NRSA63J-152X	MG RESISTOR	1.5kΩ 1/16W J	R659	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R281	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J	R700	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R282	NRSA63J-392X	MG RESISTOR	3.9kΩ 1/16W J	R701	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R283	NRSA63J-681X	MG RESISTOR	680Ω 1/16W J	R702	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R286	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	R704	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J
R287	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R705	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J
R288	NRSA02J-471X	MG RESISTOR	470Ω 1/10W J	R706	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J
R289	NRSA63J-154X	MG RESISTOR	150kΩ 1/16W J	R707	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R290	NRSA02J-561X	MG RESISTOR	560Ω 1/10W J	R708	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R292	NRSA63J-124X	MG RESISTOR	120kΩ 1/16W J	R709	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R293	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J	R718	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R296	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R721	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R297	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R729	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J
R298	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R731	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R301	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	R732	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R302	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	R733	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J
				R734	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J

△Ref No.	Part No.	Part Name	Description Local
R739	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J
R740	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R764	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J
R765	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J
R766	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J
R767	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J
R769	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J
R772	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R811	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R816	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R827	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R839	NRSA63J-225X	MG RESISTOR	2.2MΩ 1/16W J
R855	QRL029J-820	OMF RESISTOR	82Ω 2W J
R857	QRL029J-820	OMF RESISTOR	82Ω 2W J
R901	QRF074K-1R2	UNF WW RESISTOR	1.2Ω 7W K
R909	QRG01GJ-470	OMF RESISTOR	47Ω 1W J
R911	QRE121J-223Y	C RESISTOR	22kΩ 1/2W J
R912	QRT029J-R18	MF RESISTOR	0.18Ω 2W J
R913	QRT029J-R15	MF RESISTOR	0.15Ω 2W J
△R914	QRK126J-681X	UNF C RESISTOR	680Ω 1/2W J
△R915	QRK129J-6R8	UNF C RESISTOR	6.8Ω 1/2W J
△R917	QRK126J-332X	UNF C RESISTOR	3.3kΩ 1/2W J
R918	QRE121J-222Y	C RESISTOR	2.2kΩ 1/2W J
R919	QRE121J-684Y	C RESISTOR	680kΩ 1/2W J
R924	QRE121J-222Y	C RESISTOR	2.2kΩ 1/2W J
R930	QRE121J-223Y	C RESISTOR	22kΩ 1/2W J
R933	QRX01GJ-1R0	MF RESISTOR	1Ω 1W J
R940	QRE121J-181Y	C RESISTOR	180Ω 1/2W J
R941	QRL029J-183	OMF RESISTOR	18kΩ 2W J
R950	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R951	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
R952	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R953	QRE121J-820Y	C RESISTOR	82Ω 1/2W J
R972	NRVA02D-122X	CMF RESISTOR	1.2kΩ 1/10W D
R973	NRVA02D-332X	CMF RESISTOR	3.3kΩ 1/10W D
R975	QRE121J-223Y	C RESISTOR	22kΩ 1/2W J
R977	QRE121J-473Y	C RESISTOR	47kΩ 1/2W J
R978	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J
△R998	QRZ9041-275	C RESISTOR	2.7MΩ 1/2W K
R999	QRE121J-121Y	C RESISTOR	120Ω 1/2W J
L001	QQL244K-220Z	PEAKING COIL	22uH K
L232	QQL244K-560Z	PEAKING COIL	56uH K
L241	QQL244K-220Z	PEAKING COIL	22uH K
L391	QQL244K-220Z	PEAKING COIL	22uH K
L511	QQR1165-001	LINEARITY COIL	
L512	QQLZ036-821	COIL	820uH K
L521	QQLZ026-360	COIL	36uH ±7%
L701	QQL244K-220Z	PEAKING COIL	22uH K
L702	QQL244K-220Z	PEAKING COIL	22uH K
L703	QQL244K-220Z	PEAKING COIL	22uH K
L704	QQL244K-220Z	PEAKING COIL	22uH K
L705	QQL244K-220Z	PEAKING COIL	22uH K
L931	QQL26AK-470Z	CHOKE COIL	47uH K
L933	QQL26AK-470Z	CHOKE COIL	47uH K
L937	QQL26AK-470Z	CHOKE COIL	47uH K
L940	QQR0582-001Z	FERRITE BEADS	
T501	QQR1414-001	DRIVE TRANSF	
△T921	QQS0152-001	SW TRANSF	
△T951	QQT0355-001	POWER TRANSF	
CN001	QGB1505J1-35	CONNECTOR	B-B (1-35)
CN0E1	CE41507-001P	LV CONNECTOR	
CN0E3	CE41507-001P	LV CONNECTOR	
CN0HV	QGGZ5004C1-06	CONNECTOR	(1-6)
△CN0PW	QMPD390-200-JS	POWER CORD(US/CA)	2m BLACK
△CP936	ICP-N70-T	IC PROTECTOR	2.5A
△F901	QMF51N1-5R0-J5	FUSE	5A AC125V
△FR525	QRZ9017-4R7	FUSI RESISTOR	4.7Ω 1/4W J
J601	QNN0349-002	PIN JACK	COMPONENT IN
K401	QQR0621-002Z	FERRITE BEADS	
K912	QQR0582-001Z	FERRITE BEADS	
K916	QQR0582-001Z	FERRITE BEADS	
K917	QQR0582-001Z	FERRITE BEADS	
K918	QQR0582-001Z	FERRITE BEADS	
K920	QQR1139-001	FERRITE BEADS	
K931	QQR0582-001Z	FERRITE BEADS	
K932	QQR0582-001Z	FERRITE BEADS	
K933	QQR0582-001Z	FERRITE BEADS	
K935	QQR0582-001Z	FERRITE BEADS	
K937	QQR0582-001Z	FERRITE BEADS	
LC601	QQR1199-001	EMI FILTER	
LC602	QQR1199-001	EMI FILTER	
LC603	QQR1199-001	EMI FILTER	
△LF901	QQR0527-003	LINE FILTER	
△LF902	QQR0527-003	LINE FILTER	
△RY951	QSK0085-001	RELAY	

△Ref No.	Part No.	Part Name	Description Local
S421	QSL4A13-C02	LEVER SWITCH	V.CENTER
△TH901	QAD0132-3R0	P THERMISTOR	3Ω
△TU001	QAU0352-002	TUNER	
△VA901	ERZV10V621CS	ZNR	
X701	QAX0767-001Z	CRYSTAL	8MHz

## CRT SOCKET P.W. BOARD ASS'Y (SGJ-3523A-M2)

△Ref No.	Part No.	Part Name	Description Local
Q3103	2SC3928A/QR/-X	TRANSISTOR	
Q3107	2SA2005/DE/-	POW TRANSISTOR	
Q3108	2SC5511/DE/-	POW TRANSISTOR	
Q3109	2SC3928A/QR/-X	TRANSISTOR	
Q3304	2SC4544-LB	POW TRANSISTOR	
Q3305	2SC4544-LB	POW TRANSISTOR	
Q3306	2SC4544-LB	POW TRANSISTOR	
Q3351	2SA1530A/QR/-X	TRANSISTOR	
D3105	RH1S-T3	SI DIODE	
D3106	RH1S-T3	SI DIODE	
D3331	1SS133-T2	SI DIODE	
D3351	1SS133-T2	SI DIODE	
D3352	1SS133-T2	SI DIODE	
D3353	1SS133-T2	SI DIODE	
D3354	1SS133-T2	SI DIODE	
C3101	QETN1HM-106Z	E CAPACITOR	10uF 50V M
C3113	QETN2CM-106Z	E CAPACITOR	10uF 160V M
C3114	QCB32HK-472Z	C CAPACITOR	4700pF 500V K
C3115	QCB32HK-472Z	C CAPACITOR	4700pF 500V K
C3117	QETN2CM-106Z	E CAPACITOR	10uF 160V M
C3118	QETN0JM-107Z	E CAPACITOR	100uF 6.3V M
C3119	QETN1AM-107Z	E CAPACITOR	100uF 10V M
C3120	QETN1AM-337Z	E CAPACITOR	330uF 10V M
C3121	QCS32HJ-151Z	C CAPACITOR	150pF 500V J
C3127	NDC31HJ-471X	C CAPACITOR	470pF 50V J
C3301	NDC31HJ-561X	C CAPACITOR	560pF 50V J
C3302	NDC31HJ-391X	C CAPACITOR	390pF 50V J
C3303	NDC31HJ-561X	C CAPACITOR	560pF 50V J
C3323	QETN1CM-107Z	E CAPACITOR	100uF 16V M
C3331	NDC31HJ-181X	C CAPACITOR	180pF 50V J
C3332	NDC31HJ-181X	C CAPACITOR	180pF 50V J
C3333	NDC31HJ-181X	C CAPACITOR	180pF 50V J
C3351	QETN1CM-107Z	E CAPACITOR	100uF 16V M
C3363	QCTZ0121-102	C CAPACITOR	1000pF 3KV Z
R3115	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J
R3116	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J
R3122	QRT029J-R15	MF RESISTOR	0.15Ω 2W J
R3123	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J
R3124	NRSA63J-820X	MG RESISTOR	82Ω 1/16W J
R3125	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J
R3126	NRSA63J-563X	MG RESISTOR	56kΩ 1/16W J
R3127	NRSA63J-563X	MG RESISTOR	56kΩ 1/16W J
R3128	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J
R3129	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J
R3130	NRSA63J-820X	MG RESISTOR	82Ω 1/16W J
R3131	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J
R3132	QRL029J-391	OMF RESISTOR	390Ω 2W J
R3134	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R3136	NRSA63J-392X	MG RESISTOR	3.9kΩ 1/16W J
R3139	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J
R3142	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J
R3143	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J
R3144	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R3145	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J
R3146	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J
R3148	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R3301	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J
R3302	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J
R3303	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J
R3304	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J
R3305	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J
R3306	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J
R3307	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J
R3308	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J
R3309	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J
R3310	QRL029J-183	OMF RESISTOR	18kΩ 2W J
R3311	QRL029J-183	OMF RESISTOR	18kΩ 2W J
R3312	QRL029J-183	OMF RESISTOR	18kΩ 2W J
R3313	QRL029J-223	OMF RESISTOR	22kΩ 2W J
R3314	QRL029J-223	OMF RESISTOR	22kΩ 2W J
R3315	QRL029J-223	OMF RESISTOR	22kΩ 2W J

△Ref No.	Part No.	Part Name	Description Local
R3325	QRZ0107-102Z	C RESISTOR	1kΩ 1/2W K
R3326	QRZ0107-102Z	C RESISTOR	1kΩ 1/2W K
R3327	QRZ0107-102Z	C RESISTOR	1kΩ 1/2W K
R3331	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J
R3332	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J
R3333	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J
R3334	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J
R3335	NRSA63J-391X	MG RESISTOR	390Ω 1/16W J
R3351	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J
R3354	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
L3304	QQL244K-470Z	PEAKING COIL	47uH K
CN3004	QJB003-073226	SIN ID C-B WIRE	
CN3005	WJA0029-001A	E-SI ID WIRE	
CN30E2	QUB130-38A6AS	SIN TWIST WIRE	
CN30E4	QUB130-38A6AS	SIN TWIST WIRE	
K3104	QQR1114-001Z	FERRITE BEADS	
K3105	QQR1114-001Z	FERRITE BEADS	
△SK3001	QNZ0536-001	CRT SOCKET	

## AV SELECTOR P.W. BOARD ASS'Y (SGJ-5521A-M2)

△Ref No.	Part No.	Part Name	Description Local
IC5001	CXA2205Q-X	IC	
IC5201	TC90A49AP	IC	
IC5501	TA1218AN	IC	
Q5001	2SA1530A/QR/-X	TRANSISTOR	
Q5002	2SA1530A/QR/-X	TRANSISTOR	
Q5211	2SC3928A/QR/-X	TRANSISTOR	
Q5212	2SC3928A/QR/-X	TRANSISTOR	
Q5251	2SC3928A/QR/-X	TRANSISTOR	
Q5252	2SA1530A/QR/-X	TRANSISTOR	
Q5253	2SA1530A/QR/-X	TRANSISTOR	
Q5261	2SA1530A/QR/-X	TRANSISTOR	
Q5262	2SC3928A/QR/-X	TRANSISTOR	
Q5263	2SA1530A/QR/-X	TRANSISTOR	
Q5384	DTC323TK-X	DIGI TRANSISTOR	
Q5385	DTC323TK-X	DIGI TRANSISTOR	
Q5386	DTC323TK-X	DIGI TRANSISTOR	
Q5387	DTC323TK-X	DIGI TRANSISTOR	
Q5501	2SA1530A/QR/-X	TRANSISTOR	
D5391	MTZJ9.1C-T2	Z DIODE	
D5392	MTZJ9.1C-T2	Z DIODE	
D5501	MTZJ9.1C-T2	Z DIODE	
D5502	MTZJ9.1C-T2	Z DIODE	
D5503	MTZJ9.1C-T2	Z DIODE	
D5504	MTZJ9.1C-T2	Z DIODE	
D5505	MTZJ9.1C-T2	Z DIODE	
D5507	MTZJ9.1C-T2	Z DIODE	
D5508	MTZJ9.1C-T2	Z DIODE	
D5509	MTZJ9.1C-T2	Z DIODE	
D5510	MTZJ9.1C-T2	Z DIODE	
D5511	MTZJ9.1C-T2	Z DIODE	
D5512	MTZJ9.1C-T2	Z DIODE	
D5513	MTZJ9.1C-T2	Z DIODE	
C5001	QENC1HM-475Z	BP E CAPACITOR	4.7uF 50V M
C5002	NCB31HK-562X	C CAPACITOR	5600pF 50V K
C5003	NCB31HK-123X	C CAPACITOR	0.012uF 50V K
C5004	QETN1HM-105Z	E CAPACITOR	1uF 50V M
C5005	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M
C5006	QETN1HM-106Z	E CAPACITOR	10uF 50V M
C5007	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M
C5008	QETN1CM-107Z	E CAPACITOR	100uF 16V M
C5009	QENC1HM-475Z	BP E CAPACITOR	4.7uF 50V M
C5010	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M
C5011	QENC1HM-475Z	BP E CAPACITOR	4.7uF 50V M
C5012	NCB31HK-272X	C CAPACITOR	2700pF 50V K
C5013	NCB31HK-473X	C CAPACITOR	0.047uF 50V K
C5014	QENC1HM-475Z	BP E CAPACITOR	4.7uF 50V M
C5015	QETN1HM-106Z	E CAPACITOR	10uF 50V M
C5016	QETN1HM-105Z	E CAPACITOR	1uF 50V M
C5017	QENC1HM-475Z	BP E CAPACITOR	4.7uF 50V M
C5018	QENC1HM-475Z	BP E CAPACITOR	4.7uF 50V M
C5019	NCB31HK-223X	C CAPACITOR	0.022uF 50V K
C5020	NCB31HK-472X	C CAPACITOR	4700pF 50V K
C5021	QENC1HM-475Z	BP E CAPACITOR	4.7uF 50V M
C5022	NCB31EK-104X	C CAPACITOR	0.1uF 25V K
C5023	NCB31HK-472X	C CAPACITOR	4700pF 50V K
C5024	QENC1HM-475Z	BP E CAPACITOR	4.7uF 50V M

△Ref No.	Part No.	Part Name	Description Local
C5025	NCB31EK-104X	C CAPACITOR	0.1uF 25V K
C5026	QETN1HM-335Z	E CAPACITOR	3.3uF 50V M
C5027	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C5028	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C5029	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C5030	QETN1CM-227Z	E CAPACITOR	220uF 16V M
C5031	QETN1HM-106Z	E CAPACITOR	10uF 50V M
C5203	QETN1EM-476Z	E CAPACITOR	47uF 25V M
C5204	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C5205	QETN1EM-476Z	E CAPACITOR	47uF 25V M
C5206	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C5211	QENC1CM-106Z	BP E CAPACITOR	10uF 16V M
C5212	NDC31HJ-101X	C CAPACITOR	100pF 50V J
C5213	NDC31HJ-470X	C CAPACITOR	47pF 50V J
C5214	NDC31HJ-181X	C CAPACITOR	180pF 50V J
C5215	QETN1HM-474Z	E CAPACITOR	0.47uF 50V M
C5226	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C5231	QETN1CM-107Z	E CAPACITOR	100uF 16V M
C5232	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C5233	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C5234	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C5235	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C5236	QETN1CM-107Z	E CAPACITOR	100uF 16V M
C5237	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C5238	QETN1CM-107Z	E CAPACITOR	100uF 16V M
C5239	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C5240	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C5241	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C5242	QETN1CM-107Z	E CAPACITOR	100uF 16V M
C5243	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C5246	NDC31HJ-181X	C CAPACITOR	180pF 50V J
C5247	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C5251	QETN1EM-476Z	E CAPACITOR	47uF 25V M
C5252	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C5253	NDC31HJ-820X	C CAPACITOR	82pF 50V J
C5255	NDC31HJ-470X	C CAPACITOR	47pF 50V J
C5263	NDC31HJ-470X	C CAPACITOR	47pF 50V J
C5380	QETN1HM-106Z	E CAPACITOR	10uF 50V M
C5391	QETN1HM-474Z	E CAPACITOR	0.47uF 50V M
C5392	QETN1HM-474Z	E CAPACITOR	0.47uF 50V M
C5501	QETN1HM-225Z	E CAPACITOR	2.2uF 50V M
C5502	QETN1HM-225Z	E CAPACITOR	2.2uF 50V M
C5503	QETN1HM-106Z	E CAPACITOR	10uF 50V M
C5504	QETN1HM-106Z	E CAPACITOR	10uF 50V M
C5508	QETN1HM-106Z	E CAPACITOR	10uF 50V M
C5509	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C5520	QETN1HM-225Z	E CAPACITOR	2.2uF 50V M
C5521	QETN1HM-225Z	E CAPACITOR	2.2uF 50V M
C5531	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C5532	QETN1EM-476Z	E CAPACITOR	47uF 25V M
C5533	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C5534	QENC1CM-106Z	BP E CAPACITOR	10uF 16V M
R5001	NRSA63J-105X	MG RESISTOR	1MΩ 1/16W J
R5002	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J
R5003	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J
R5004	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R5005	NRSA63J-683X	MG RESISTOR	68kΩ 1/16W J
R5007	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J
R5008	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J
R5009	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J
R5010	NRSA63J-392X	MG RESISTOR	3.9kΩ 1/16W J
R5011	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R5012	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R5013	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R5014	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R5015	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R5016	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R5017	NRSA63J-105X	MG RESISTOR	1MΩ 1/16W J
R5031	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R5032	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R5033	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J
R5034	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J
R5210	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R5211	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J
R5212	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R5213	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R5214	NRSA63J-181X	MG RESISTOR	180Ω 1/16W J
R5215	NRSA63J-152X	MG RESISTOR	1.5kΩ 1/16W J
R5216	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J
R5217	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J
R5240	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R5241	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J
R5242	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R5243	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R5251	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J
R5253	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J

△Ref No.	Part No.	Part Name	Description Local
R5254	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R5255	NRSA63J-681X	MG RESISTOR	680Ω 1/16W J
R5258	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R5259	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J
R5261	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R5262	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J
R5263	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J
R5265	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R5269	NRSA63J-681X	MG RESISTOR	680Ω 1/16W J
R5270	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R5384	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J
R5385	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J
R5386	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J
R5387	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J
R5391	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J
R5392	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J
R5393	NRSA63J-823X	MG RESISTOR	82kΩ 1/16W J
R5394	NRSA63J-823X	MG RESISTOR	82kΩ 1/16W J
R5395	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J
R5396	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J
R5501	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R5502	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R5503	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R5504	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R5505	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R5507	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R5508	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J
R5509	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R5510	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R5511	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R5512	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R5513	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J
R5514	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R5515	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R5516	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R5517	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R5519	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J
R5520	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J
R5521	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J
R5522	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J
R5523	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J
R5524	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R5526	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R5532	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J
R5533	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J
R5541	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R5542	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R5543	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R5544	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R5545	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R5546	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R5558	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R5559	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R5560	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R5561	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
L5202	QQL244K-150Z	PEAKING COIL	15uH K
L5211	QQL244K-4R7Z	PEAKING COIL	4.7uH K
L5241	QQL244K-4R7Z	PEAKING COIL	4.7uH K
L5243	QQL244K-4R7Z	PEAKING COIL	4.7uH K
L5244	QQL244K-4R7Z	PEAKING COIL	4.7uH K
L5261	QQL244K-150Z	PEAKING COIL	15uH K
CN5001	QGB1505K1-35	CONNECTOR	B-B (1-35)
J5501	QNZ0454-001	AV JACK	S/V/L/R IN
J5502	QNN0348-001	PIN JACK	V/L/R IN
J5503	QNN0348-001	PIN JACK	AUDIO OUT

## FRONT CONTROL P.W. BOARD ASS'Y (SGJ-6521A-M2)

△Ref No.	Part No.	Part Name	Description Local
C6401	QETN1HM-106Z	E CAPACITOR	10uF 50V M
C6402	QETN1HM-225Z	E CAPACITOR	2.2uF 50V M
C6403	QETN1HM-225Z	E CAPACITOR	2.2uF 50V M
R6401	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J
R6402	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J
R6403	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J
R6702	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R6703	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R6704	NRSA63J-152X	MG RESISTOR	1.5kΩ 1/16W J
R6705	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J
R6706	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J

△Ref No.	Part No.	Part Name	Description Local
CN6006	QJB003-054610	SIN ID C-B WIRE	
CN6007	QJB003-064426	SIN ID C-B WIRE	
CN600B	QJB003-050806	SIN ID C-B WIRE	
J6401	QNN0281-003	PIN JACK	V IN
J6402	QNN0281-002	PIN JACK	L IN
J6403	QNN0282-001	PIN JACK	R IN
LC6401	QQR1459-001	EMI F. COIL	
LC6402	QQR1459-001	EMI F. COIL	
LC6403	QQR1459-001	EMI F. COIL	
S6702	QSW0619-003Z	TACT SWITCH	MENU
S6703	QSW0619-003Z	TACT SWITCH	CH-
S6704	QSW0619-003Z	TACT SWITCH	CH+
S6705	QSW0619-003Z	TACT SWITCH	VOL-
S6706	QSW0619-003Z	TACT SWITCH	VOL+

## LED & POWER SW P.W. BOARD ASS'Y (SGJ-7521A-M2)

△Ref No.	Part No.	Part Name	Description Local
IC7701	GP1UM281QK	IR DETECT UNIT	38kHz
Q7702	UN2112-X	DIGI TRANSISTOR	
D7701	LG22440	LED	POWER
C7701	QETN1EM-476Z	E CAPACITOR	47uF 25V M
R7708	NRSA63J-152X	MG RESISTOR	1.5kΩ 1/16W J
R7709	NRSA63J-561X	MG RESISTOR	560Ω 1/16W J
R7710	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R7711	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
S7701	QSW0847-001	TACT SWITCH	POWER

# PRINTED WIRING BOARD PARTS LIST [AV-27F476/s]

## MAIN P.W. BOARD ASS'Y (SGJ-1579A-M2)

△Ref No.	Part No.	Part Name	Description Local	△Ref No.	Part No.	Part Name	Description Local
IC201	TM8812CSDNG5JB4	IC	(SERVIVE)	D957	1N4002G-T2	SI DIODE	
IC421	LA78041	IC		D972	MTZJ15C-T2	Z DIODE	
IC621	TFA9843J/N1	IC		D973	1SS133-T2	SI DIODE	
IC651	NJM2150AD	IC		C001	NDC31HJ-100X	C CAPACITOR	10pF 50V J
IC702	ATE08-27F476R	IC		C002	QETN0JM-477Z	E CAPACITOR	470uF 6.3V M
IC703	S-80840CNY-G-T	IC		C202	QETN1HM-105Z	E CAPACITOR	1uF 50V M
IC704	AN78L05-T	IC		C203	NCB31HK-152X	C CAPACITOR	1500pF 50V K
IC852	L7809CP	IC		C211	QENC1CM-106Z	BP E CAPACITOR	10uF 16V M
IC853	L7805CP	IC		C212	NDC31HJ-100X	C CAPACITOR	10pF 50V J
△IC911	STR-G9626-F3	IC		C221	QETN1HM-106Z	E CAPACITOR	10uF 50V M
△IC921	SE135N	IC		C222	NCF31AZ-105X	C CAPACITOR	1uF 10V Z
				C223	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
				C233	NDC31HJ-680X	C CAPACITOR	68pF 50V J
Q003	UN2212-X	DIGI TRANSISTOR		C237	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
Q211	2SC3928A/QR/-X	TRANSISTOR		C241	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
Q232	2SC3928A/QR/-X	TRANSISTOR		C242	QETN1HM-225Z	E CAPACITOR	2.2uF 50V M
Q233	2SC3928A/QR/-X	TRANSISTOR		C243	QETN0JM-227Z	E CAPACITOR	220uF 6.3V M
Q352	2SC3928A/QR/-X	TRANSISTOR		C244	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
Q501	2SC4212/Z1/	TRANSISTOR		C281	QFVF1HJ-474Z	MF CAPACITOR	0.47uF 50V J
△Q511	2SD2645-YD	POW TRANSISTOR	H. OUT	C282	QETN1CM-107Z	E CAPACITOR	100uF 16V M
△Q531	2SC2785/JH/-T	TRANSISTOR		C283	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
Q532	2SA1530A/QR/-X	TRANSISTOR		C284	QETN1HM-225Z	E CAPACITOR	2.2uF 50V M
Q541	2SA1530A/QR/-X	TRANSISTOR		C285	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
Q542	2SA1530A/QR/-X	TRANSISTOR		C286	QETN1HM-474Z	E CAPACITOR	0.47uF 50V M
Q543	2SD1267A/QP/	POW TRANSISTOR		C287	QETN1CM-107Z	E CAPACITOR	100uF 16V M
Q621	2SD601A/QR/-X	TRANSISTOR		C288	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
Q622	2SD601A/QR/-X	TRANSISTOR		C302	NCB31EK-104X	C CAPACITOR	0.1uF 25V K
Q623	2SA1530A/QR/-X	TRANSISTOR		C352	QETN1EM-476Z	E CAPACITOR	47uF 25V M
Q625	2SD601A/QR/-X	TRANSISTOR		C354	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
Q701	2SA1530A/QR/-X	TRANSISTOR		C360	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
Q951	2SD1383K/AB/-X	SI TRANSISTOR		C391	QETN1CM-107Z	E CAPACITOR	100uF 16V M
Q971	2SA1208/ST/Z1-T	TRANSISTOR		C392	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
				C422	QFN32AK-102Z	M CAPACITOR	1000pF 100V K
D308	MTZJ5.1B-T2	Z DIODE		C424	QETN1VM-107Z	E CAPACITOR	100uF 35V M
D309	MTZJ5.1B-T2	Z DIODE		C425	QETN1VM-477Z	E CAPACITOR	470uF 35V M
D310	MTZJ4.3A-T2	Z DIODE		C427	QETN1HM-225Z	E CAPACITOR	2.2uF 50V M
D352	MTZJ9.1C-T2	Z DIODE		C428	QETM1EM-228	E CAPACITOR	2200uF 25V M
D353	1SS133-T2	SI DIODE		C431	QFLC2AK-563Z	M CAPACITOR	0.056uF 100V K
D354	MTZJ3.3A-T2	Z DIODE		C433	QETN1EM-476Z	E CAPACITOR	47uF 25V M
D421	GP10DE-5009-T2	SI DIODE		C435	NCB31HK-183X	C CAPACITOR	0.018uF 50V K
D422	MTZJ75-T2	Z DIODE		C440	QCS32HJ-100Z	C CAPACITOR	10pF 500V J
D501	RH3G-F1	SI DIODE		C501	QCB32HK-151Z	C CAPACITOR	150pF 500V K
D502	RU3AM-LFC4	SI DIODE		C502	QCB32HK-331Z	C CAPACITOR	330pF 500V K
D521	RH1S-T3	SI DIODE		C503	QEHR2CM-105Z	E CAPACITOR	1uF 160V M
D523	RGP10J-04TS-T3	SI DIODE		C504	QE20203-107	E CAPACITOR	100uF 160V M
D525	1SS81-T5	SI DIODE		C507	QEM61HK-475Z	E CAPACITOR	4.7uF 50V K
D526	1SS81-T5	SI DIODE		C508	QEM61HK-475Z	E CAPACITOR	4.7uF 50V K
D527	1SR124-400A-T2	SI DIODE		△C510	QFZ0200-482	MPP CAPACITOR	4800pF 1.5kV H
D529	MTZJ9.1C-T2	Z DIODE		△C513	QFZ0196-113	MPP CAPACITOR	0.011uF 1.5kV H
△D531	MA4068N/Z1/-T2	Z DIODE		C514	QFP32GJ-183	PP CAPACITOR	0.018uF 400V J
D535	1SS133-T2	SI DIODE		C515	QFZ0197-404	MPP CAPACITOR	0.4uF 250V J
D601	MTZJ9.1C-T2	Z DIODE		C516	QCB32HK-561Z	C CAPACITOR	560pF 500V K
D602	MTZJ9.1C-T2	Z DIODE		C521	QETN2EM-106Z	E CAPACITOR	10uF 250V M
D603	MTZJ9.1C-T2	Z DIODE		C523	QEHR1VM-477Z	E CAPACITOR	470uF 35V M
D621	1SS133-T2	SI DIODE		C525	QETN1VM-107Z	E CAPACITOR	100uF 35V M
D623	1SS133-T2	SI DIODE		C526	QFV21HJ-824Z	MF CAPACITOR	0.82uF 50V J
D626	1SS133-T2	SI DIODE		C527	QFLC2AJ-103Z	M CAPACITOR	0.01uF 100V J
D705	1SS133-T2	SI DIODE		C531	QCB32HK-471Z	C CAPACITOR	470pF 500V K
D706	MTZJ5.6B-T2	Z DIODE		C533	QETN1HM-106Z	E CAPACITOR	10uF 50V M
D707	MTZJ5.6B-T2	Z DIODE		C601	NCB31CK-224X	C CAPACITOR	0.22uF 16V K
D708	MTZJ5.6B-T2	Z DIODE		C602	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
D709	MTZJ5.6B-T2	Z DIODE		C603	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
△D901	GSIB460	BRIDGE DIODE		C604	QETN1HM-106Z	E CAPACITOR	10uF 50V M
D910	MA700A-T2	SB DIODE		C621	QETN1HM-106Z	E CAPACITOR	10uF 50V M
D911	RGP10J-04TS-T3	SI DIODE		C622	QETN1HM-106Z	E CAPACITOR	10uF 50V M
D912	RGP10J-04TS-T3	SI DIODE		C624	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M
D913	1SS133-T2	SI DIODE		C626	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M
D914	1SS133-T2	SI DIODE		C627	NCF21CZ-105X	C CAPACITOR	1uF 16V Z
D915	SARS01-T2	SI DIODE		C628	QETN1HM-226Z	E CAPACITOR	22uF 50V M
D917	MTZJ30A-T2	Z DIODE		C629	NCF21CZ-105X	C CAPACITOR	1uF 16V Z
D918	MTZJ5.1C-T2	Z DIODE		C630	QETN1EM-227Z	E CAPACITOR	220uF 25V M
D920	1SS133-T2	SI DIODE		C632	QETN1EM-477Z	E CAPACITOR	470uF 25V M
D931	RU4AM-LFT2	SI DIODE		C633	QETN1EM-227Z	E CAPACITOR	220uF 25V M
D933	RU3YX-LFC4	SI DIODE		C634	QETN1HM-106Z	E CAPACITOR	10uF 50V M
D935	RU3YX-LFC4	SI DIODE		C635	QETN1HM-105Z	E CAPACITOR	1uF 50V M
D937	RU3YX-LFC4	SI DIODE		C637	QETN1EM-108Z	E CAPACITOR	1000uF 25V M
D941	MTZJ33A-T2	Z DIODE		C638	QETN1EM-108Z	E CAPACITOR	1000uF 25V M
D945	MTZJ9.1B-T2	Z DIODE		C651	NCF31AZ-105X	C CAPACITOR	1uF 10V Z
D952	1SS133-T2	SI DIODE		C652	NCF31AZ-105X	C CAPACITOR	1uF 10V Z
D953	1SS133-T2	SI DIODE		C655	NCB31HK-332X	C CAPACITOR	3300pF 50V K
D954	1N4002G-T2	SI DIODE		C656	NCB31HK-332X	C CAPACITOR	3300pF 50V K
D955	1N4002G-T2	SI DIODE		C657	NCB31HK-333X	C CAPACITOR	0.033uF 50V K
D956	1N4002G-T2	SI DIODE		C658	NCB31HK-333X	C CAPACITOR	0.033uF 50V K

△Ref No.	Part No.	Part Name	Description Local	△Ref No.	Part No.	Part Name	Description Local
C659	QETN1HM-106Z	E CAPACITOR	10uF 50V M	R305	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C660	QETN1EM-476Z	E CAPACITOR	47uF 25V M	R306	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C661	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R318	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J
C662	QETN1HM-106Z	E CAPACITOR	10uF 50V M	R319	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
C700	NCB31HK-102X	C CAPACITOR	1000pF 50V K	R354	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C701	QETN1HM-106Z	E CAPACITOR	10uF 50V M	R355	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C702	QETN1HM-106Z	E CAPACITOR	10uF 50V M	R356	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J
C703	QETN1HM-106Z	E CAPACITOR	10uF 50V M	R359	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
C704	QETN1CM-107Z	E CAPACITOR	100uF 16V M	R421	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J
C705	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R423	NRSA63J-393X	MG RESISTOR	39kΩ 1/16W J
C708	NDC31HJ-220X	C CAPACITOR	22pF 50V J	R424	NRSA63J-393X	MG RESISTOR	39kΩ 1/16W J
C709	NDC31HJ-220X	C CAPACITOR	22pF 50V J	R426	NRSA63J-183X	MG RESISTOR	18kΩ 1/16W J
C711	QETN1CM-107Z	E CAPACITOR	100uF 16V M	R427	QRT029J-1R5	MF RESISTOR	1.5Ω 2W J
C712	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R429	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J
C728	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R431	NRSA63J-152X	MG RESISTOR	1.5kΩ 1/16W J
C807	QETN1AM-477Z	E CAPACITOR	470uF 10V M	R432	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C815	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R433	NRSA63J-681X	MG RESISTOR	680Ω 1/16W J
C853	QETN1EM-227Z	E CAPACITOR	220uF 25V M	R434	QRL029J-181	OMF RESISTOR	180Ω 2W J
C854	QETN1CM-227Z	E CAPACITOR	220uF 16V M	R435	QRE121J-102Y	C RESISTOR	1kΩ 1/2W J
C856	QETN1CM-227Z	E CAPACITOR	220uF 16V M	R441	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C857	QETN0JM-477Z	E CAPACITOR	470uF 6.3V M	R501	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
△C901	QFZ9072-104	MM CAPACITOR	0.1uF AC250V K	R502	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J
△C902	QFZ9072-473	MM CAPACITOR	0.047uF AC250V K	R503	QRE121J-103Y	C RESISTOR	10kΩ 1/2W J
△C903	QFZ9072-104	MM CAPACITOR	0.1uF AC250V K	R504	QRL039J-222	OMF RESISTOR	2.2kΩ 3W J
△C905	QCZ9054-102	C CAPACITOR	1000pF AC250V Z	R505	QRL039J-182	OMF RESISTOR	1.8kΩ 3W J
C907	QEZ0644-567	E CAPACITOR	560uF 200V J	R511	QRE121J-220Y	C RESISTOR	22Ω 1/2W J
△C908	QCZ9054-102	C CAPACITOR	1000pF AC250V Z	R512	QRE121J-681Y	C RESISTOR	680Ω 1/2W J
C912	QCZ0340-222	C CAPACITOR	220pF 2KV K	R516	QRZ0221-2R0	OMF RESISTOR	2Ω 7W K
C913	QFLC1HJ-471Z	M CAPACITOR	470pF 50V J	R524	NRSA63J-563X	MG RESISTOR	56kΩ 1/16W J
C914	QETN1HM-107Z	E CAPACITOR	100uF 50V M	R526	QRE121J-272Y	C RESISTOR	2.7kΩ 1/2W J
C916	NDC31HJ-331X	C CAPACITOR	330pF 50V J	R527	QRE121J-154Y	C RESISTOR	150kΩ 1/2W J
C917	NCB31HK-182X	C CAPACITOR	1800pF 50V K	R528	QRE121J-154Y	C RESISTOR	150kΩ 1/2W J
C918	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	R529	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J
C919	QFP32GJ-103	PP CAPACITOR	0.01uF 400V J	△R531	QRZ0230-391X	UNF C RESISTOR	390Ω 1/4W J
C931	QEZ0203-227	E CAPACITOR	220uF 160V M	R532	NRSA63J-273X	MG RESISTOR	27kΩ 1/16W J
C932	QETN1EM-108Z	E CAPACITOR	1000uF 25V M	R533	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J
C933	QETN1EM-108Z	E CAPACITOR	1000uF 25V M	R534	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J
C934	NDC31HJ-221X	C CAPACITOR	220pF 50V J	△R535	NRVA02D-272X	CMF RESISTOR	2.7kΩ 1/10W D
C935	QETN1VM-108Z	E CAPACITOR	1000uF 35V M	R536	QRE121J-470Y	C RESISTOR	47Ω 1/2W J
C937	QCZ0340-102	C CAPACITOR	1000pF 2KV K	△R537	NRVA02D-752X	CMF RESISTOR	7.5kΩ 1/10W D
C938	QETN1EM-477Z	E CAPACITOR	470uF 25V M	R538	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J
C939	QCB32HK-152Z	C CAPACITOR	1500pF 500V K	R543	QRE121J-122Y	C RESISTOR	1.2kΩ 1/2W J
C941	QCB32HK-102Z	C CAPACITOR	1000pF 500V K	R544	QRE121J-392Y	C RESISTOR	3.9kΩ 1/2W J
C942	QEHR1HM-105Z	E CAPACITOR	1uF 50V M	R545	QRE121J-822Y	C RESISTOR	8.2kΩ 1/2W J
C943	QETN1CM-108Z	E CAPACITOR	1000uF 16V M	R546	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J
C945	QETN1EM-477Z	E CAPACITOR	470uF 25V M	R547	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J
C952	QETN1CM-227Z	E CAPACITOR	220uF 16V M	R548	QRE121J-152Y	C RESISTOR	1.5kΩ 1/2W J
C971	QETN1CM-107Z	E CAPACITOR	100uF 16V M	R553	QRL039J-390	OMF RESISTOR	39Ω 3W J
C972	QETN1EM-476Z	E CAPACITOR	47uF 25V M	△R554	QRK126J-150X	UNF C RESISTOR	15Ω 1/2W J
△C997	QCZ9079-102	C CAPACITOR	1000pF AC250V M	R555	QRT029J-3R3	MF RESISTOR	3.3Ω 2W J
△C998	QCZ9074-103	C CAPACITOR	0.01uF AC250V M	R601	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J
△C999	QCZ9074-103	C CAPACITOR	0.01uF AC250V M	R602	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J
				R603	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J
R001	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R621	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J
R002	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R623	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R003	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R624	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J
R004	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R626	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R008	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R627	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R010	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R628	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R201	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	R630	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J
R212	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J	R631	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R215	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	R649	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J
R216	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	R651	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J
R217	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R652	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J
R227	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	R653	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J
R231	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J	R654	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J
R237	NRSA63J-392X	MG RESISTOR	3.9kΩ 1/16W J	R655	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R238	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	R657	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R241	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	R659	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R243	NRSA63J-152X	MG RESISTOR	1.5kΩ 1/16W J	R700	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R281	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J	R701	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R282	NRSA63J-392X	MG RESISTOR	3.9kΩ 1/16W J	R702	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R283	NRSA63J-681X	MG RESISTOR	680Ω 1/16W J	R704	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J
R286	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	R705	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J
R287	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R706	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J
R288	NRSA02J-471X	MG RESISTOR	470Ω 1/10W J	R707	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R289	NRSA63J-154X	MG RESISTOR	150kΩ 1/16W J	R708	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R290	NRSA02J-561X	MG RESISTOR	560Ω 1/10W J	R709	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R292	NRSA63J-124X	MG RESISTOR	120kΩ 1/16W J	R718	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R293	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J	R721	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R296	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R729	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J
R297	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R731	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R298	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R732	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R301	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	R733	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J
R302	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	R734	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J
R303	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	R739	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J
R304	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R740	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J



△Ref No.	Part No.	Part Name	Description Local
R764	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J
R765	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J
R766	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J
R767	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J
R769	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J
R772	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R811	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R816	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R827	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R839	NRSA63J-225X	MG RESISTOR	2.2MΩ 1/16W J
R855	QRL029J-820	OMF RESISTOR	82Ω 2W J
R857	QRL029J-820	OMF RESISTOR	82Ω 2W J
R901	QRF074K-1R2	UNF WW RESISTOR	1.2Ω 7W K
R909	QRG01GJ-470	OMF RESISTOR	47Ω 1W J
R911	QRE121J-223Y	C RESISTOR	22kΩ 1/2W J
R912	QRT029J-R18	MF RESISTOR	0.18Ω 2W J
R913	QRT029J-R15	MF RESISTOR	0.15Ω 2W J
△R914	QRK126J-681X	UNF C RESISTOR	680Ω 1/2W J
△R915	QRK129J-6R8	UNF C RESISTOR	6.8Ω 1/2W J
△R917	QRK126J-332X	UNF C RESISTOR	3.3kΩ 1/2W J
R918	QRE121J-222Y	C RESISTOR	2.2kΩ 1/2W J
R919	QRE121J-684Y	C RESISTOR	680kΩ 1/2W J
R924	QRE121J-222Y	C RESISTOR	2.2kΩ 1/2W J
R930	QRE121J-223Y	C RESISTOR	22kΩ 1/2W J
R933	QRX01GJ-1R0	MF RESISTOR	1Ω 1W J
R940	QRE121J-181Y	C RESISTOR	180Ω 1/2W J
R941	QRL029J-183	OMF RESISTOR	18kΩ 2W J
R950	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R951	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
R952	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R953	QRE121J-820Y	C RESISTOR	82Ω 1/2W J
R972	NRVA02D-122X	CMF RESISTOR	1.2kΩ 1/10W D
R973	NRVA02D-332X	CMF RESISTOR	3.3kΩ 1/10W D
R975	QRE121J-223Y	C RESISTOR	22kΩ 1/2W J
R977	QRE121J-473Y	C RESISTOR	47kΩ 1/2W J
R978	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J
△R998	QRZ9041-275	C RESISTOR	2.7MΩ 1/2W K
R999	QRE121J-121Y	C RESISTOR	120Ω 1/2W J
L001	QQL244K-220Z	PEAKING COIL	22uH K
L232	QQL244K-560Z	PEAKING COIL	56uH K
L241	QQL244K-220Z	PEAKING COIL	22uH K
L391	QQL244K-220Z	PEAKING COIL	22uH K
L511	QQR1165-001	LINEARITY COIL	
L512	QQLZ036-821	COIL	820uH K
L521	QQLZ026-760	COIL	76uH ±7%
L701	QQL244K-220Z	PEAKING COIL	22uH K
L702	QQL244K-220Z	PEAKING COIL	22uH K
L703	QQL244K-220Z	PEAKING COIL	22uH K
L704	QQL244K-220Z	PEAKING COIL	22uH K
L705	QQL244K-220Z	PEAKING COIL	22uH K
L931	QQL26AK-470Z	CHOKE COIL	47uH K
L933	QQL26AK-470Z	CHOKE COIL	47uH K
L937	QQL26AK-470Z	CHOKE COIL	47uH K
L940	QQR0582-001Z	FERRITE BEADS	
T501	QQR1414-001	DRIVE TRANSF	
△T921	QQS0152-001	SW TRANSF	
△T951	QQT0355-001	POWER TRANSF	
CN001	QGB1505J1-35	CONNECTOR	B-B (1-35)
CN0E1	CE41507-001P	LV CONNECTOR	
CN0E3	CE41507-001P	LV CONNECTOR	
CN0HV	QGZ5004C1-06	CONNECTOR	(1-6)
△CN0PV	QMPD390-200-JS	POWER CORD(US/CA)	2m BLACK
△CP936	ICP-N70-T	IC PROTECTOR	2.5A
△F901	QMF51N1-5R0-J5	FUSE	5A AC125V
△FR525	QRZ9017-4R7	FUSI RESISTOR	4.7Ω 1/4W J
J601	QNN0349-002	PIN JACK	COMPONENT IN
K401	QQR0621-002Z	FERRITE BEADS	
K912	QQR0582-001Z	FERRITE BEADS	
K916	QQR0582-001Z	FERRITE BEADS	
K917	QQR0582-001Z	FERRITE BEADS	
K918	QQR0582-001Z	FERRITE BEADS	
K920	QQR1139-001	FERRITE BEADS	
K931	QQR0582-001Z	FERRITE BEADS	
K932	QQR0582-001Z	FERRITE BEADS	
K933	QQR0582-001Z	FERRITE BEADS	
K935	QQR0582-001Z	FERRITE BEADS	
K937	QQR0582-001Z	FERRITE BEADS	
LC601	QQR1653-001	C MODE CHOKE CO	
LC602	QQR1653-001	C MODE CHOKE CO	
LC603	QQR1653-001	C MODE CHOKE CO	
△LF901	QQR0527-003	LINE FILTER	
△LF902	QQR0527-003	LINE FILTER	
△PC921	PC123Y22	PHOTO COUPLER	
△RY951	QSK0085-001	RELAY	
S421	QSL4A13-C02	LEVER SWITCH	V.CENTER

△Ref No.	Part No.	Part Name	Description Local
△TH901	QAD0132-3R0	P THERMISTOR	3Ω
△TU001	QAU0352-002	TUNER	
△VA901	ERZV10V621CS	ZNR	
X701	QAX0767-001Z	CRYSTAL	8MHz

## CRT SOCKET P.W. BOARD ASS'Y (SGJ-3523A-M2)

REFER TO PARTS LIST IN PAGE 3-8 FOR THIS P.W. BOARD.

## AV SELECTOR P.W. BOARD ASS'Y (SGJ-5521A-M2)

REFER TO PARTS LIST IN PAGE 3-9 FOR THIS P.W. BOARD.

## FRONT CONTROL P.W. BOARD ASS'Y (SGJ-6521A-M2)

REFER TO PARTS LIST IN PAGE 3-10 FOR THIS P.W. BOARD.

## LED & POWER SW P.W. BOARD ASS'Y (SGJ-7521A-M2)

REFER TO PARTS LIST IN PAGE 3-10 FOR THIS P.W. BOARD.

# PRINTED WIRING BOARD PARTS LIST [AV-32F476M]

## MAIN P.W. BOARD ASS'Y (SGJ-1572A-M2)

△Ref No.	Part No.	Part Name	Description Local
IC201	TM8812CSDNG5JB4	IC	(SERVICE)
IC421	LA78041	IC	
IC621	TFA9843J/N1	IC	
IC651	NJM2150AD	IC	
IC702	ATE08-27F476R	IC	
IC703	S-80840CNY-G-T	IC	
IC704	AN78L05-T	IC	
IC852	L7809CP	IC	
IC853	L7805CP	IC	
△IC911	STR-G9626-F3	IC	
△IC921	SE135N	IC	
Q003	UN2212-X	DIGI TRANSISTOR	H. OUT
Q211	2SC3928A/QR/-X	TRANSISTOR	
Q232	2SC3928A/QR/-X	TRANSISTOR	
Q233	2SC3928A/QR/-X	TRANSISTOR	
Q352	2SC3928A/QR/-X	TRANSISTOR	
Q501	2SC4212/Z1/	TRANSISTOR	
△Q511	2SD2645-YD	POW TRANSISTOR	
△Q531	2SC2785/JH/-T	TRANSISTOR	
Q532	2SA1530A/QR/-X	TRANSISTOR	
Q541	2SA1530A/QR/-X	TRANSISTOR	
Q542	2SA1530A/QR/-X	TRANSISTOR	
Q543	2SD1267A/QP/	POW TRANSISTOR	
Q621	2SD601A/QR/-X	TRANSISTOR	
Q622	2SD601A/QR/-X	TRANSISTOR	
Q623	2SA1530A/QR/-X	TRANSISTOR	
Q625	2SD601A/QR/-X	TRANSISTOR	
Q701	2SA1530A/QR/-X	TRANSISTOR	
Q951	2SD1383K/AB/-X	SI TRANSISTOR	
Q971	2SA1208/ST/Z1-T	TRANSISTOR	
D308	MTZJ4.3A-T2	Z DIODE	
D309	MTZJ5.1B-T2	Z DIODE	
D310	MTZJ4.3A-T2	Z DIODE	
D352	MTZJ9.1C-T2	Z DIODE	
D353	1SS133-T2	SI DIODE	
D354	MTZJ3.3A-T2	Z DIODE	
D421	1N4003-T2	SI DIODE	
D422	MTZJ75-T2	Z DIODE	
D501	RH3G-F1	SI DIODE	
D502	RU3AM-LFC4	SI DIODE	
D521	RH1S-T3	SI DIODE	
D523	RGP10J-04TS-T3	SI DIODE	
D525	1SS81-T5	SI DIODE	
D526	1SS81-T5	SI DIODE	
D527	1SR124-400A-T2	SI DIODE	
D529	MTZJ9.1C-T2	Z DIODE	
△D531	MA4068N/Z1-T2	Z DIODE	
D535	1SS133-T2	SI DIODE	
D601	MTZJ9.1C-T2	Z DIODE	
D602	MTZJ9.1C-T2	Z DIODE	
D603	MTZJ9.1C-T2	Z DIODE	
D621	1SS133-T2	SI DIODE	
D623	1SS133-T2	SI DIODE	
D626	1SS133-T2	SI DIODE	
D705	1SS133-T2	SI DIODE	
D706	MTZJ5.6B-T2	Z DIODE	
D707	MTZJ5.6B-T2	Z DIODE	
D708	MTZJ5.6B-T2	Z DIODE	
D709	MTZJ5.6B-T2	Z DIODE	
△D901	GSIB460	BRIDGE DIODE	
D910	MA700A-T2	SB DIODE	
D911	RGP10J-04TS-T3	SI DIODE	
D912	RGP10J-04TS-T3	SI DIODE	
D913	1SS133-T2	SI DIODE	
D914	1SS133-T2	SI DIODE	
D915	SARS01-T2	SI DIODE	
D917	MTZJ30A-T2	Z DIODE	
D918	MTZJ5.1C-T2	Z DIODE	
D920	1SS133-T2	SI DIODE	
D931	RU4AM-LFT2	SI DIODE	
D933	RU3YX-LFC4	SI DIODE	
D935	RU3YX-LFC4	SI DIODE	
D937	RU3YX-LFC4	SI DIODE	
D941	MTZJ33A-T2	Z DIODE	
D945	MTZJ9.1B-T2	Z DIODE	
D952	1SS133-T2	SI DIODE	
D953	1SS133-T2	SI DIODE	
D954	1N4002G-T2	SI DIODE	
D955	1N4002G-T2	SI DIODE	
D956	1N4002G-T2	SI DIODE	

△Ref No.	Part No.	Part Name	Description Local
D957	1N4002G-T2	SI DIODE	
D972	MTZJ15C-T2	Z DIODE	
D973	1SS133-T2	SI DIODE	
C001	NDC31HJ-100X	C CAPACITOR	10pF 50V J
C002	QETN0JM-477Z	E CAPACITOR	470uF 6.3V M
C202	QETN1HM-105Z	E CAPACITOR	1uF 50V M
C203	NCB31HK-152X	C CAPACITOR	1500pF 50V K
C211	QENC1CM-106Z	BP E CAPACITOR	10uF 16V M
C212	NDC31HJ-100X	C CAPACITOR	10pF 50V J
C221	QETN1HM-106Z	E CAPACITOR	10uF 50V M
C222	NCF31AZ-105X	C CAPACITOR	1uF 10V Z
C223	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C233	NDC31HJ-680X	C CAPACITOR	68pF 50V J
C237	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C241	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C242	QETN1HM-225Z	E CAPACITOR	2.2uF 50V M
C243	QETN0JM-227Z	E CAPACITOR	220uF 6.3V M
C244	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C281	QFVF1HJ-474Z	MF CAPACITOR	0.47uF 50V J
C282	QETN1CM-107Z	E CAPACITOR	100uF 16V M
C283	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C284	QETN1HM-225Z	E CAPACITOR	2.2uF 50V M
C285	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C286	QETN1HM-474Z	E CAPACITOR	0.47uF 50V M
C287	QETN1CM-107Z	E CAPACITOR	100uF 16V M
C288	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C302	NCB31EK-104X	C CAPACITOR	0.1uF 25V K
C352	QETN1EM-476Z	E CAPACITOR	47uF 25V M
C354	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C360	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C391	QETN1CM-107Z	E CAPACITOR	100uF 16V M
C392	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C422	QFN32AK-102Z	M CAPACITOR	1000pF 100V K
C424	QETN1VM-107Z	E CAPACITOR	100uF 35V M
C425	QETN1VM-477Z	E CAPACITOR	470uF 35V M
C427	QETN1HM-225Z	E CAPACITOR	2.2uF 50V M
C428	QETM1EM-228	E CAPACITOR	2200uF 25V M
C431	QFLC2AK-563Z	M CAPACITOR	0.056uF 100V K
C433	QETN1EM-476Z	E CAPACITOR	47uF 25V M
C435	NCB31HK-183X	C CAPACITOR	0.018uF 50V K
C440	QCS32HJ-100Z	C CAPACITOR	10pF 500V J
C501	QCB32HK-151Z	C CAPACITOR	150pF 500V K
C502	QCB32HK-331Z	C CAPACITOR	330pF 500V K
C503	QEHR2CM-105Z	E CAPACITOR	1uF 160V M
C504	QEZ0203-107	E CAPACITOR	100uF 160V M
C507	QEZ0195-475Z	BP E CAPACITOR	4.7uF 50V M
△C510	QFZ0200-422	MPP CAPACITOR	4200pF 1.5kV H
△C513	QFZ0198-133	MPP CAPACITOR	0.013uF 1.5kV H
C514	QFP32JJ-183	PP CAPACITOR	0.018uF 630V J
C515	QFZ0197-474	MPP CAPACITOR	0.47uF 250V J
C516	QCB32HK-561Z	C CAPACITOR	560pF 500V K
C521	QETN2EM-106Z	E CAPACITOR	10uF 250V M
C523	QEHR1VM-108Z	E CAPACITOR	1000uF 35V M
C525	QETN1VM-107Z	E CAPACITOR	100uF 35V M
C526	QFV21HJ-824Z	MF CAPACITOR	0.82uF 50V J
C527	QFLC2AJ-103Z	M CAPACITOR	0.01uF 100V J
C533	QETN1HM-106Z	E CAPACITOR	10uF 50V M
C601	NCB31CK-224X	C CAPACITOR	0.22uF 16V K
C602	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C603	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C604	QETN1HM-106Z	E CAPACITOR	10uF 50V M
C621	QETN1HM-106Z	E CAPACITOR	10uF 50V M
C622	QETN1HM-106Z	E CAPACITOR	10uF 50V M
C624	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M
C626	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M
C627	NCF21CZ-105X	C CAPACITOR	1uF 16V Z
C628	QETN1HM-226Z	E CAPACITOR	22uF 50V M
C629	NCF21CZ-105X	C CAPACITOR	1uF 16V Z
C630	QETN1EM-227Z	E CAPACITOR	220uF 25V M
C632	QETN1EM-477Z	E CAPACITOR	470uF 25V M
C633	QETN1EM-227Z	E CAPACITOR	220uF 25V M
C634	QETN1HM-106Z	E CAPACITOR	10uF 50V M
C635	QETN1HM-105Z	E CAPACITOR	1uF 50V M
C637	QETN1EM-108Z	E CAPACITOR	1000uF 25V M
C638	QETN1EM-108Z	E CAPACITOR	1000uF 25V M
C651	NCF31AZ-105X	C CAPACITOR	1uF 10V Z
C652	NCF31AZ-105X	C CAPACITOR	1uF 10V Z
C655	NCB31HK-332X	C CAPACITOR	3300pF 50V K
C656	NCB31HK-332X	C CAPACITOR	3300pF 50V K
C657	NCB31HK-333X	C CAPACITOR	0.033uF 50V K
C658	NCB31HK-333X	C CAPACITOR	0.033uF 50V K
C659	QETN1HM-106Z	E CAPACITOR	10uF 50V M
C660	QETN1EM-476Z	E CAPACITOR	47uF 25V M

△Ref No.	Part No.	Part Name	Description Local	△Ref No.	Part No.	Part Name	Description Local
C661	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R318	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J
C662	QETN1HM-106Z	E CAPACITOR	10uF 50V M	R319	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
C700	NCB31HK-102X	C CAPACITOR	1000pF 50V K	R354	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C701	QETN1HM-106Z	E CAPACITOR	10uF 50V M	R355	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C702	QETN1HM-106Z	E CAPACITOR	10uF 50V M	R356	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J
C703	QETN1HM-106Z	E CAPACITOR	10uF 50V M	R359	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
C704	QETN1CM-107Z	E CAPACITOR	100uF 16V M	R421	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J
C705	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R423	NRSA63J-393X	MG RESISTOR	39kΩ 1/16W J
C708	NDC31HJ-220X	C CAPACITOR	22pF 50V J	R424	NRSA63J-393X	MG RESISTOR	39kΩ 1/16W J
C709	NDC31HJ-220X	C CAPACITOR	22pF 50V J	R426	NRSA63J-183X	MG RESISTOR	18kΩ 1/16W J
C711	QETN1CM-107Z	E CAPACITOR	100uF 16V M	R427	QRT029J-1R2	MF RESISTOR	1.2Ω 2W J
C712	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R428	QRE121J-120Y	C RESISTOR	12Ω 1/2W J
C728	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R429	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J
C807	QETN1AM-477Z	E CAPACITOR	470uF 10V M	R431	NRSA63J-152X	MG RESISTOR	1.5kΩ 1/16W J
C815	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R432	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C853	QETN1EM-227Z	E CAPACITOR	220uF 25V M	R433	NRSA63J-681X	MG RESISTOR	680Ω 1/16W J
C854	QETN1CM-227Z	E CAPACITOR	220uF 16V M	R434	QRL029J-221	OMF RESISTOR	220Ω 2W J
C856	QETN1CM-227Z	E CAPACITOR	220uF 16V M	R435	QRE121J-102Y	C RESISTOR	1kΩ 1/2W J
C857	QETN0JM-477Z	E CAPACITOR	470uF 6.3V M	R441	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
△C901	QFZ9072-104	MM CAPACITOR	0.1uF AC250V K	R501	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
△C902	QFZ9072-473	MM CAPACITOR	0.047uF AC250V K	R502	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J
△C903	QFZ9072-104	MM CAPACITOR	0.1uF AC250V K	R503	QRE121J-103Y	C RESISTOR	10kΩ 1/2W J
△C905	QCZ9054-102	C CAPACITOR	1000pF AC250V Z	R504	QRL039J-152	OMF RESISTOR	1.5kΩ 3W J
C907	QE20644-567	E CAPACITOR	560uF 200V K	R505	QRL039J-152	OMF RESISTOR	1.5kΩ 3W J
△C908	QCZ9054-102	C CAPACITOR	1000pF AC250V Z	R511	QRE121J-220Y	C RESISTOR	22Ω 1/2W J
C912	QCZ0340-222	C CAPACITOR	2200pF 2kV K	R512	QRE121J-681Y	C RESISTOR	680Ω 1/2W J
C913	QFLC1HJ-471Z	M CAPACITOR	470pF 50V J	R516	QRZ0221-2R0	OMF RESISTOR	2Ω 7W K
C914	QETN1HM-107Z	E CAPACITOR	100uF 50V M	R524	NRSA63J-563X	MG RESISTOR	56kΩ 1/16W J
C916	NDC31HJ-331X	C CAPACITOR	330pF 50V J	R526	QRE121J-272Y	C RESISTOR	2.7kΩ 1/2W J
C917	NCB31HK-182X	C CAPACITOR	1800pF 50V K	R527	QRE121J-154Y	C RESISTOR	150kΩ 1/2W J
C918	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	R528	QRE121J-154Y	C RESISTOR	150kΩ 1/2W J
C919	QFP32GJ-103	PP CAPACITOR	0.01uF 400V J	R529	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J
C931	QE20203-227	E CAPACITOR	220uF 160V M	△R531	QRZ0230-391X	UNF C RESISTOR	390Ω 1/4W J
C932	QETN1EM-108Z	E CAPACITOR	1000uF 25V M	R532	NRSA63J-273X	MG RESISTOR	27kΩ 1/16W J
C933	QETN1EM-108Z	E CAPACITOR	1000uF 25V M	R533	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J
C934	NDC31HJ-221X	C CAPACITOR	220pF 50V J	R534	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J
C935	QETN1VM-108Z	E CAPACITOR	1000uF 35V M	△R535	NRVA02D-272X	CMF RESISTOR	2.7kΩ 1/10W D
C937	QCZ0340-102	C CAPACITOR	1000pF 2kV K	R536	QRE121J-470Y	C RESISTOR	47Ω 1/2W J
C938	QETN1EM-477Z	E CAPACITOR	470uF 25V M	△R537	NRVA02D-752X	CMF RESISTOR	7.5kΩ 1/10W D
C939	QCB32HK-152Z	C CAPACITOR	1500pF 500V K	R538	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J
C941	QCB32HK-102Z	C CAPACITOR	1000pF 500V K	R543	QRE121J-122Y	C RESISTOR	1.2kΩ 1/2W J
C942	QEH1HM-105Z	E CAPACITOR	1uF 50V M	R544	QRE121J-392Y	C RESISTOR	3.9kΩ 1/2W J
C943	QETN1CM-108Z	E CAPACITOR	1000uF 16V M	R545	QRE121J-822Y	C RESISTOR	8.2kΩ 1/2W J
C951	QETN1EM-477Z	E CAPACITOR	470uF 25V M	R546	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J
C952	QETN1CM-227Z	E CAPACITOR	220uF 16V M	R547	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J
C971	QETN1CM-107Z	E CAPACITOR	100uF 16V M	R548	QRE121J-152Y	C RESISTOR	1.5kΩ 1/2W J
C972	QETN1EM-476Z	E CAPACITOR	47uF 25V M	R553	QRL039J-330	OMF RESISTOR	33Ω 3W J
△C997	QCZ9079-102	C CAPACITOR	1000pF AC250V M	△R554	QRK126J-220X	UNF C RESISTOR	22Ω 1/2W J
△C998	QCZ9074-103	C CAPACITOR	0.01uF AC250V M	R555	QRT029J-2R2	MF RESISTOR	2.2Ω 2W J
△C999	QCZ9074-103	C CAPACITOR	0.01uF AC250V M	R601	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J
R001	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R602	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J
R002	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R603	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J
R003	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R621	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J
R004	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R623	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R008	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R624	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J
R010	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R626	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R201	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	R627	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R212	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J	R628	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R215	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	R630	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J
R216	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	R631	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R217	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R649	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J
R227	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	R651	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J
R231	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J	R652	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J
R237	NRSA63J-392X	MG RESISTOR	3.9kΩ 1/16W J	R653	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J
R238	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	R654	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J
R241	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	R655	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R243	NRSA63J-152X	MG RESISTOR	1.5kΩ 1/16W J	R657	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R281	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J	R659	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R282	NRSA63J-392X	MG RESISTOR	3.9kΩ 1/16W J	R700	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R283	NRSA63J-681X	MG RESISTOR	680Ω 1/16W J	R701	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R286	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	R702	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R287	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R704	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J
R288	NRSA02J-471X	MG RESISTOR	470Ω 1/10W J	R705	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J
R289	NRSA63J-154X	MG RESISTOR	150kΩ 1/16W J	R706	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J
R290	NRSA02J-561X	MG RESISTOR	560Ω 1/10W J	R707	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R292	NRSA63J-124X	MG RESISTOR	120kΩ 1/16W J	R708	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R293	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J	R709	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R296	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R718	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R297	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R721	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R298	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R729	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J
R301	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	R731	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R302	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	R732	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R303	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	R733	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J
R304	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R734	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J
R305	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R739	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J
R306	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R740	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
				R764	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J

△Ref No.	Part No.	Part Name	Description Local
R765	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J
R766	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J
R767	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J
R769	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J
R772	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R811	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R816	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R827	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R839	NRSA63J-225X	MG RESISTOR	2.2MΩ 1/16W J
R855	QRL029J-820	OMF RESISTOR	82Ω 2W J
R857	QRL029J-820	OMF RESISTOR	82Ω 2W J
R901	QRF074K-1R2	UNF WW RESISTOR	1.2Ω 7W K
R909	QRG01GJ-470	OMF RESISTOR	47Ω 1W J
R911	QRE121J-223Y	C RESISTOR	22kΩ 1/2W J
R912	QRT029J-R18	MF RESISTOR	0.18Ω 2W J
R913	QRT029J-R15	MF RESISTOR	0.15Ω 2W J
△R914	QRK126J-681X	UNF C RESISTOR	680Ω 1/2W J
△R915	QRK129J-6R8	UNF C RESISTOR	6.8Ω 1/2W J
△R917	QRK126J-332X	UNF C RESISTOR	3.3kΩ 1/2W J
R918	QRE121J-222Y	C RESISTOR	2.2kΩ 1/2W J
R919	QRE121J-684Y	C RESISTOR	680kΩ 1/2W J
R924	QRE121J-222Y	C RESISTOR	2.2kΩ 1/2W J
R930	QRE121J-223Y	C RESISTOR	22kΩ 1/2W J
R933	QRX01GJ-1R0	MF RESISTOR	1Ω 1W J
R940	QRE121J-181Y	C RESISTOR	180Ω 1/2W J
R941	QRL029J-183	OMF RESISTOR	18kΩ 2W J
R950	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R951	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
R952	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R953	QRE121J-820Y	C RESISTOR	82Ω 1/2W J
R972	NRVA02D-102X	CMF RESISTOR	1kΩ 1/10W D
R973	NRVA02D-332X	CMF RESISTOR	3.3kΩ 1/10W D
R975	QRE121J-223Y	C RESISTOR	22kΩ 1/2W J
R977	QRE121J-473Y	C RESISTOR	47kΩ 1/2W J
R978	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J
△R998	QRZ9041-275	C RESISTOR	2.7MΩ 1/2W K
R999	QRE121J-121Y	C RESISTOR	120Ω 1/2W J
L001	QQL244K-220Z	PEAKING COIL	22uH K
L232	QQL244K-560Z	PEAKING COIL	56uH K
L241	QQL244K-220Z	PEAKING COIL	22uH K
L391	QQL244K-220Z	PEAKING COIL	22uH K
L511	QQR1027-005	LINEARITY COIL	
L512	QQLZ036-821	COIL	820uH K
L521	QQLZ018-800	COIL	80uH
L701	QQL244K-220Z	PEAKING COIL	22uH K
L702	QQL244K-220Z	PEAKING COIL	22uH K
L703	QQL244K-220Z	PEAKING COIL	22uH K
L704	QQL244K-220Z	PEAKING COIL	22uH K
L705	QQL244K-220Z	PEAKING COIL	22uH K
L931	QQL26AK-470Z	CHOKE COIL	47uH K
L933	QQL26AK-470Z	CHOKE COIL	47uH K
L937	QQL26AK-470Z	CHOKE COIL	47uH K
L940	QQR0582-001Z	FERRITE BEADS	
T501	QQR1414-001	DRIVE TRANSF	
△T921	QQS0152-001	SW TRANSF	
△T951	QQT0355-001	POWER TRANSF	
CN001	QGB1505J1-35	CONNECTOR	B-B (1-35)
CN0E1	CE41507-001P	LV CONNECTOR	
CN0E3	CE41507-001P	LV CONNECTOR	
CN0HV	QGGZ5004C1-06	CONNECTOR	(1-6)
△CN0PW	QMPD390-200-JS	POWER CORD(US/CA)	2m BLACK
△CP936	ICP-N70-T	IC PROTECTOR	2.5A
△F901	QMF51N1-5R0-J5	FUSE	5A AC125V
△FR525	QRZ9017-4R7	FUSI RESISTOR	4.7Ω 1/4W J
J601	QNN0349-002	PIN JACK	COMPONENT IN
K401	QQR0621-002Z	FERRITE BEADS	
K912	QQR0582-001Z	FERRITE BEADS	
K916	QQR0582-001Z	FERRITE BEADS	
K917	QQR0582-001Z	FERRITE BEADS	
K918	QQR0582-001Z	FERRITE BEADS	
K920	QQR1139-001	FERRITE BEADS	
K931	QQR0582-001Z	FERRITE BEADS	
K932	QQR0582-001Z	FERRITE BEADS	
K933	QQR0582-001Z	FERRITE BEADS	
K935	QQR0582-001Z	FERRITE BEADS	
K937	QQR0582-001Z	FERRITE BEADS	
LC601	QQR1199-001	EMI FILTER	
LC602	QQR1199-001	EMI FILTER	
LC603	QQR1199-001	EMI FILTER	
△LF901	QQR0527-003	LINE FILTER	
△LF902	QQR0527-003	LINE FILTER	
△PC921	PC123Y22	PHOTO COUPLER	
△RY951	QSK0085-001	RELAY	
S421	QSL4A13-C02	LEVER SWITCH	V.CENTER
△TH901	QAD0132-3R0	P THERMISTOR	3Ω

△Ref No.	Part No.	Part Name	Description Local
△TU001	QAU0352-002	TUNER	
△VA901	ERZV10V621CS	ZNR	
X701	QAX0767-001Z	CRYSTAL	8MHz

## CRT SOCKET P.W. BOARD ASS'Y (SGJ-3521A-M2)

△Ref No.	Part No.	Part Name	Description Local
Q3103	2SC3928A/QR/-X	TRANSISTOR	
Q3107	2SA2005/DE/-	POW TRANSISTOR	
Q3108	2SC5511/DE/-	POW TRANSISTOR	
Q3109	2SC3928A/QR/-X	TRANSISTOR	
Q3304	2SC4544-LB	POW TRANSISTOR	
Q3305	2SC4544-LB	POW TRANSISTOR	
Q3306	2SC4544-LB	POW TRANSISTOR	
Q3351	2SA1530A/QR/-X	TRANSISTOR	
D3105	RH1S-T3	SI DIODE	
D3106	RH1S-T3	SI DIODE	
D3331	1SS133-T2	SI DIODE	
D3351	1SS133-T2	SI DIODE	
D3352	1SS133-T2	SI DIODE	
D3353	1SS133-T2	SI DIODE	
D3354	1SS133-T2	SI DIODE	
C3101	QETN1HM-106Z	E CAPACITOR	10uF 50V M
C3113	QETN2CM-106Z	E CAPACITOR	10uF 160V M
C3114	QCB32HK-472Z	C CAPACITOR	4700pF 500V K
C3115	QCB32HK-472Z	C CAPACITOR	4700pF 500V K
C3117	QETN2CM-106Z	E CAPACITOR	10uF 160V M
C3118	QETN0JM-107Z	E CAPACITOR	100uF 6.3V M
C3119	QETN1AM-107Z	E CAPACITOR	100uF 10V M
C3120	QETN1AM-337Z	E CAPACITOR	330uF 10V M
C3121	QCS32HJ-151Z	C CAPACITOR	150pF 500V J
C3127	NDC31HJ-471X	C CAPACITOR	470pF 50V J
C3301	NDC31HJ-561X	C CAPACITOR	560pF 50V J
C3302	NDC31HJ-391X	C CAPACITOR	390pF 50V J
C3303	NDC31HJ-561X	C CAPACITOR	560pF 50V J
C3323	QETN1CM-477Z	E CAPACITOR	470uF 16V M
C3331	NDC31HJ-181X	C CAPACITOR	180pF 50V J
C3332	NDC31HJ-181X	C CAPACITOR	180pF 50V J
C3333	NDC31HJ-181X	C CAPACITOR	180pF 50V J
C3351	QETN1CM-227Z	E CAPACITOR	220uF 16V M
C3363	QCZ0121-102	C CAPACITOR	1000pF 3KV Z
R3115	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J
R3116	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J
R3122	QRT029J-R15	MF RESISTOR	0.15Ω 2W J
R3123	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J
R3124	NRSA63J-820X	MG RESISTOR	82Ω 1/16W J
R3125	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J
R3126	NRSA63J-563X	MG RESISTOR	56kΩ 1/16W J
R3127	NRSA63J-563X	MG RESISTOR	56kΩ 1/16W J
R3128	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J
R3129	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J
R3130	NRSA63J-820X	MG RESISTOR	82Ω 1/16W J
R3131	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J
R3132	QRL029J-391	OMF RESISTOR	390Ω 2W J
R3134	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R3136	NRSA63J-392X	MG RESISTOR	3.9kΩ 1/16W J
R3139	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J
R3142	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J
R3143	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J
R3144	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R3145	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J
R3146	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J
R3148	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R3301	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J
R3302	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J
R3303	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J
R3304	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J
R3305	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J
R3306	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J
R3307	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J
R3308	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J
R3309	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J
R3310	QRL029J-183	OMF RESISTOR	18kΩ 2W J
R3311	QRL029J-183	OMF RESISTOR	18kΩ 2W J
R3312	QRL029J-183	OMF RESISTOR	18kΩ 2W J
R3313	QRL029J-223	OMF RESISTOR	22kΩ 2W J
R3314	QRL029J-223	OMF RESISTOR	22kΩ 2W J
R3315	QRL029J-223	OMF RESISTOR	22kΩ 2W J
R3325	QRZ0107-102Z	C RESISTOR	1kΩ 1/2W K

△Ref No.	Part No.	Part Name	Description Local
R3326	QRZ0107-102Z	C RESISTOR	1kΩ 1/2W K
R3327	QRZ0107-102Z	C RESISTOR	1kΩ 1/2W K
R3331	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J
R3332	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J
R3333	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J
R3334	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J
R3335	NRSA63J-391X	MG RESISTOR	390Ω 1/16W J
R3351	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J
R3354	NRSA63J-561X	MG RESISTOR	560Ω 1/16W J
R3355	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
L3304	QQL244K-470Z	PEAKING COIL	47uH K
CN3004	QJB003-074022	SIN ID C-B WIRE	
CN3005	WJA0029-002A	E-SI ID WIRE	
CN30E2	QUB130-46A6AS	SIN TWIST WIRE	
CN30E4	QUB130-46A6AS	SIN TWIST WIRE	
K3104	QQR1114-001Z	FERRITE BEADS	
K3105	QQR1114-001Z	FERRITE BEADS	
△SK3001	QNZ0536-001	CRT SOCKET	

### AV SELECTOR P.W. BOARD ASS'Y (SGJ-5521A-M2)

REFER TO PARTS LIST IN PAGE 3-9 FOR THIS P.W. BOARD.

### FRONT CONTROL P.W. BOARD ASS'Y (SGJ-6521A-M2)

REFER TO PARTS LIST IN PAGE 3-10 FOR THIS P.W. BOARD.

### LED & POWER SW P.W. BOARD ASS'Y (SGJ-7521A-M2)

REFER TO PARTS LIST IN PAGE 3-10 FOR THIS P.W. BOARD.

# PRINTED WIRING BOARD PARTS LIST [AV-32F476/z]

## MAIN P.W. BOARD ASS'Y (SGJ-1575A-M2)

△Ref No.	Part No.	Part Name	Description Local
IC201	TM8812CSDNG5JB4	IC	(SERVICE)
IC421	LA78041	IC	
IC621	TFA9843J/N1	IC	
IC651	NJM2150AD	IC	
IC702	ATE08-27F476R	IC	
IC703	S-80840CNY-G-T	IC	
IC704	AN78L05-T	IC	
IC852	L7809CP	IC	
IC853	L7805CP	IC	
△IC911	STR-G9626-F3	IC	
△IC921	SE135N	IC	H. OUT
Q003	UN2212-X	DIGI TRANSISTOR	
Q211	2SC3928A/QR/-X	TRANSISTOR	
Q232	2SC3928A/QR/-X	TRANSISTOR	
Q233	2SC3928A/QR/-X	TRANSISTOR	
Q352	2SC3928A/QR/-X	TRANSISTOR	
Q501	2SC4212/Z1/	TRANSISTOR	
△Q511	2SD2645-YD	POW TRANSISTOR	
△Q531	2SC2785/JH/-T	TRANSISTOR	
Q532	2SA1530A/QR/-X	TRANSISTOR	
Q541	2SA1530A/QR/-X	TRANSISTOR	
Q542	2SA1530A/QR/-X	TRANSISTOR	
Q543	2SD1267A/QP/	POW TRANSISTOR	
Q621	2SD601A/QR/-X	TRANSISTOR	
Q622	2SD601A/QR/-X	TRANSISTOR	
Q623	2SA1530A/QR/-X	TRANSISTOR	
Q625	2SD601A/QR/-X	TRANSISTOR	
Q701	2SA1530A/QR/-X	TRANSISTOR	
Q951	2SD1383K/AB/-X	SI TRANSISTOR	
Q971	2SA1208/ST/Z1-T	TRANSISTOR	
D308	MTZJ4.3A-T2	Z DIODE	
D309	MTZJ5.1B-T2	Z DIODE	
D310	MTZJ4.3A-T2	Z DIODE	
D352	MTZJ9.1C-T2	Z DIODE	
D353	1SS133-T2	SI DIODE	
D354	MTZJ3.3A-T2	Z DIODE	
D421	1N4003-T2	SI DIODE	
D422	MTZJ75-T2	Z DIODE	
D501	RH3G-F1	SI DIODE	
D502	RU3AM-LFC4	SI DIODE	
D521	RH1S-T3	SI DIODE	
D523	RGP10J-04TS-T3	SI DIODE	
D525	1SS81-T5	SI DIODE	
D526	1SS81-T5	SI DIODE	
D527	1SR124-400A-T2	SI DIODE	
D529	MTZJ9.1C-T2	Z DIODE	
△D531	MA4068N/Z1-T2	Z DIODE	
D535	1SS133-T2	SI DIODE	
D601	MTZJ9.1C-T2	Z DIODE	
D602	MTZJ9.1C-T2	Z DIODE	
D603	MTZJ9.1C-T2	Z DIODE	
D621	1SS133-T2	SI DIODE	
D623	1SS133-T2	SI DIODE	
D626	1SS133-T2	SI DIODE	
D705	1SS133-T2	SI DIODE	
D706	MTZJ5.6B-T2	Z DIODE	
D707	MTZJ5.6B-T2	Z DIODE	
D708	MTZJ5.6B-T2	Z DIODE	
D709	MTZJ5.6B-T2	Z DIODE	
△D901	GSIB460	BRIDGE DIODE	
D910	MA700A-T2	SB DIODE	
D911	RGP10J-04TS-T3	SI DIODE	
D912	RGP10J-04TS-T3	SI DIODE	
D913	1SS133-T2	SI DIODE	
D914	1SS133-T2	SI DIODE	
D915	SARS01-T2	SI DIODE	
D917	MTZJ30A-T2	Z DIODE	
D918	MTZJ5.1C-T2	Z DIODE	
D920	1SS133-T2	SI DIODE	
D931	RU4AM-LFT2	SI DIODE	
D933	RU3YX-LFC4	SI DIODE	
D935	RU3YX-LFC4	SI DIODE	
D937	RU3YX-LFC4	SI DIODE	
D941	MTZJ33A-T2	Z DIODE	
D945	MTZJ9.1B-T2	Z DIODE	
D952	1SS133-T2	SI DIODE	
D953	1SS133-T2	SI DIODE	
D954	1N4002G-T2	SI DIODE	
D955	1N4002G-T2	SI DIODE	
D956	1N4002G-T2	SI DIODE	

△Ref No.	Part No.	Part Name	Description Local
D957	1N4002G-T2	SI DIODE	
D972	MTZJ15C-T2	Z DIODE	
D973	1SS133-T2	SI DIODE	
△PC921	PC123Y22	PHOTO COUPLER	
C001	NDC31HJ-100X	C CAPACITOR	10pF 50V J
C002	QETN0JM-477Z	E CAPACITOR	470uF 6.3V M
C202	QETN1HM-105Z	E CAPACITOR	1uF 50V M
C203	NCB31HK-152X	C CAPACITOR	1500pF 50V K
C211	QENC1CM-106Z	BP E CAPACITOR	10uF 16V M
C212	NDC31HJ-100X	C CAPACITOR	10pF 50V J
C221	QETN1HM-106Z	E CAPACITOR	10uF 50V M
C222	NCF31AZ-105X	C CAPACITOR	1uF 10V Z
C223	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C233	NDC31HJ-680X	C CAPACITOR	68pF 50V J
C237	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C241	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C242	QETN1HM-225Z	E CAPACITOR	2.2uF 50V M
C243	QETN0JM-227Z	E CAPACITOR	220uF 6.3V M
C244	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C281	QFVF1HJ-474Z	MF CAPACITOR	0.47uF 50V J
C282	QETN1CM-107Z	E CAPACITOR	100uF 16V M
C283	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C284	QETN1HM-225Z	E CAPACITOR	2.2uF 50V M
C285	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C286	QETN1HM-474Z	E CAPACITOR	0.47uF 50V M
C287	QETN1CM-107Z	E CAPACITOR	100uF 16V M
C288	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C302	NCB31EK-104X	C CAPACITOR	0.1uF 25V K
C352	QETN1EM-476Z	E CAPACITOR	47uF 25V M
C354	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C360	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C391	QETN1CM-107Z	E CAPACITOR	100uF 16V M
C392	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C422	QFN32AK-102Z	M CAPACITOR	1000pF 100V K
C424	QETN1VM-107Z	E CAPACITOR	100uF 35V M
C425	QETN1VM-477Z	E CAPACITOR	470uF 35V M
C427	QETN1HM-225Z	E CAPACITOR	2.2uF 50V M
C428	QETM1EM-228	E CAPACITOR	2200uF 25V M
C431	QFLC2AK-563Z	M CAPACITOR	0.056uF 100V K
C433	QETN1EM-476Z	E CAPACITOR	47uF 25V M
C435	NCB31HK-183X	C CAPACITOR	0.018uF 50V K
C440	QCS32HJ-100Z	C CAPACITOR	10pF 500V J
C501	QCB32HK-151Z	C CAPACITOR	150pF 500V K
C502	QCB32HK-331Z	C CAPACITOR	330pF 500V K
C503	QEHR2CM-105Z	E CAPACITOR	1uF 160V M
C504	QEZ0203-107	E CAPACITOR	100uF 160V M
C507	QEZ0195-475Z	BP E CAPACITOR	4.7uF 50V M
△C510	QFZ0200-382	MPP CAPACITOR	3800pF 1.5kV H
△C513	QFZ0196-103	MPP CAPACITOR	0.01uF 1.5kV H
C514	QFP32JJ-183	PP CAPACITOR	0.018uF 630V J
C515	QFZ0197-334	MPP CAPACITOR	0.33uF 250V J
C516	QCB32HK-561Z	C CAPACITOR	560pF 500V K
C521	QETN2EM-106Z	E CAPACITOR	10uF 250V M
C523	QEHR1VM-108Z	E CAPACITOR	1000uF 35V M
C525	QETN1VM-107Z	E CAPACITOR	100uF 35V M
C526	QFV21HJ-824Z	MF CAPACITOR	0.82uF 50V J
C527	QFLC2AJ-103Z	M CAPACITOR	0.01uF 100V J
C533	QETN1HM-106Z	E CAPACITOR	10uF 50V M
C601	NCB31CK-224X	C CAPACITOR	0.22uF 16V K
C602	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C603	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C604	QETN1HM-106Z	E CAPACITOR	10uF 50V M
C621	QETN1HM-106Z	E CAPACITOR	10uF 50V M
C622	QETN1HM-106Z	E CAPACITOR	10uF 50V M
C624	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M
C626	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M
C627	NCF21CZ-105X	C CAPACITOR	1uF 16V Z
C628	QETN1HM-226Z	E CAPACITOR	22uF 50V M
C629	NCF21CZ-105X	C CAPACITOR	1uF 16V Z
C630	QETN1EM-227Z	E CAPACITOR	220uF 25V M
C632	QETN1EM-477Z	E CAPACITOR	470uF 25V M
C633	QETN1EM-227Z	E CAPACITOR	220uF 25V M
C634	QETN1HM-106Z	E CAPACITOR	10uF 50V M
C635	QETN1HM-105Z	E CAPACITOR	1uF 50V M
C637	QETN1EM-108Z	E CAPACITOR	1000uF 25V M
C638	QETN1EM-108Z	E CAPACITOR	1000uF 25V M
C651	NCF31AZ-105X	C CAPACITOR	1uF 10V Z
C652	NCF31AZ-105X	C CAPACITOR	1uF 10V Z
C655	NCB31HK-332X	C CAPACITOR	3300pF 50V K
C656	NCB31HK-332X	C CAPACITOR	3300pF 50V K
C657	NCB31HK-333X	C CAPACITOR	0.033uF 50V K
C658	NCB31HK-333X	C CAPACITOR	0.033uF 50V K

△Ref No.	Part No.	Part Name	Description Local	△Ref No.	Part No.	Part Name	Description Local
C659	QETN1HM-106Z	E CAPACITOR	10uF 50V M	R305	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C660	QETN1EM-476Z	E CAPACITOR	47uF 25V M	R306	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C661	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R318	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J
C662	QETN1HM-106Z	E CAPACITOR	10uF 50V M	R319	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
C700	NCB31HK-102X	C CAPACITOR	1000pF 50V K	R354	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C701	QETN1HM-106Z	E CAPACITOR	10uF 50V M	R355	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C702	QETN1HM-106Z	E CAPACITOR	10uF 50V M	R356	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J
C703	QETN1HM-106Z	E CAPACITOR	10uF 50V M	R359	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
C704	QETN1CM-107Z	E CAPACITOR	100uF 16V M	R421	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J
C705	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R423	NRSA63J-393X	MG RESISTOR	39kΩ 1/16W J
C708	NDC31HJ-220X	C CAPACITOR	22pF 50V J	R424	NRSA63J-393X	MG RESISTOR	39kΩ 1/16W J
C709	NDC31HJ-220X	C CAPACITOR	22pF 50V J	R426	NRSA63J-183X	MG RESISTOR	18kΩ 1/16W J
C711	QETN1CM-107Z	E CAPACITOR	100uF 16V M	R427	QRT029J-1R2	MF RESISTOR	1.2Ω 2W J
C712	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R428	QRE121J-120Y	C RESISTOR	12Ω 1/2W J
C728	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R429	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J
C807	QETN1AM-477Z	E CAPACITOR	470uF 10V M	R431	NRSA63J-152X	MG RESISTOR	1.5kΩ 1/16W J
C815	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R432	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C853	QETN1EM-227Z	E CAPACITOR	220uF 50V M	R433	NRSA63J-681X	MG RESISTOR	680Ω 1/16W J
C854	QETN1CM-227Z	E CAPACITOR	220uF 16V M	R434	QRL029J-221	OMF RESISTOR	220Ω 2W J
C856	QETN1CM-227Z	E CAPACITOR	220uF 16V M	R435	QRE121J-821Y	C RESISTOR	820Ω 1/2W J
C857	QETN0JM-477Z	E CAPACITOR	470uF 6.3V M	R441	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
△C901	QFZ9072-104	MM CAPACITOR	0.1uF AC250V K	R501	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
△C902	QFZ9072-473	MM CAPACITOR	0.047uF AC250V K	R502	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J
△C903	QFZ9072-104	MM CAPACITOR	0.1uF AC250V K	R503	QRE121J-103Y	C RESISTOR	10kΩ 1/2W J
△C905	QCZ9054-102	C CAPACITOR	1000pF AC250V Z	R504	QRL039J-152	OMF RESISTOR	1.5kΩ 3W J
C907	QEZ0644-567	E CAPACITOR	560uF 200V K	R505	QRL039J-152	OMF RESISTOR	1.5kΩ 3W J
△C908	QCZ9054-102	C CAPACITOR	1000pF AC250V Z	R511	QRE121J-220Y	C RESISTOR	22Ω 1/2W J
C912	QCZ0340-222	C CAPACITOR	2200pF 2kV K	R512	QRE121J-681Y	C RESISTOR	680Ω 1/2W J
C913	QFLC1HJ-471Z	M CAPACITOR	470pF 50V J	R516	QRZ0221-2R0	OMF RESISTOR	2Ω 7W K
C914	QETN1HM-107Z	E CAPACITOR	100uF 50V M	R524	NRSA63J-563X	MG RESISTOR	56kΩ 1/16W J
C916	NDC31HJ-331X	C CAPACITOR	330pF 50V J	R526	QRE121J-272Y	C RESISTOR	2.7kΩ 1/2W J
C917	NCB31HK-182X	C CAPACITOR	1800pF 50V K	R527	QRE121J-154Y	C RESISTOR	150kΩ 1/2W J
C918	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	R528	QRE121J-154Y	C RESISTOR	150kΩ 1/2W J
C919	QFP32GJ-103	PP CAPACITOR	0.01uF 400V J	R529	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J
C931	QEZ0203-227	E CAPACITOR	220uF 160V M	△R531	QRZ0230-391X	UNF C RESISTOR	390Ω 1/4W J
C932	QETN1EM-108Z	E CAPACITOR	1000uF 25V M	R532	NRSA63J-273X	MG RESISTOR	27kΩ 1/16W J
C933	QETN1EM-108Z	E CAPACITOR	1000uF 25V M	R533	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J
C934	NDC31HJ-221X	C CAPACITOR	220pF 50V J	R534	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J
C935	QETN1VM-108Z	E CAPACITOR	1000uF 35V M	△R535	NRVA02D-242X	CMF RESISTOR	2.4kΩ 1/10W D
C937	QCZ0340-102	C CAPACITOR	1000pF 2kV K	R536	QRE121J-470Y	C RESISTOR	47Ω 1/2W J
C938	QETN1EM-477Z	E CAPACITOR	470uF 25V M	△R537	NRVA02D-752X	CMF RESISTOR	7.5kΩ 1/10W D
C939	QCB32HK-152Z	C CAPACITOR	1500pF 500V K	R538	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J
C941	QCB32HK-102Z	C CAPACITOR	1000pF 500V K	R543	QRE121J-122Y	C RESISTOR	1.2kΩ 1/2W J
C942	QHR1HM-105Z	E CAPACITOR	1uF 50V M	R544	QRE121J-392Y	C RESISTOR	3.9kΩ 1/2W J
C943	QETN1CM-108Z	E CAPACITOR	1000uF 16V M	R545	QRE121J-153Y	C RESISTOR	15kΩ 1/2W J
C951	QETN1EM-477Z	E CAPACITOR	470uF 25V M	R546	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J
C952	QETN1CM-227Z	E CAPACITOR	220uF 16V M	R547	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J
C971	QETN1CM-107Z	E CAPACITOR	100uF 16V M	R548	QRE121J-152Y	C RESISTOR	1.5kΩ 1/2W J
C972	QETN1EM-476Z	E CAPACITOR	47uF 25V M	R553	QRL039J-330	OMF RESISTOR	33Ω 3W J
△C997	QCZ9079-102	C CAPACITOR	1000pF AC250V M	△R554	QRK126J-220X	UNF C RESISTOR	22Ω 1/2W J
△C998	QCZ9074-103	C CAPACITOR	0.01uF AC250V M	R555	QRT029J-2R2	MF RESISTOR	2.2Ω 2W J
△C999	QCZ9074-103	C CAPACITOR	0.01uF AC250V M	R601	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J
R001	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R602	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J
R002	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R603	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J
R003	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R621	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J
R004	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R623	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R008	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R624	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J
R010	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R626	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R201	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	R627	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R212	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J	R628	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R215	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	R630	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J
R216	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	R631	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R217	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R649	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J
R227	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	R651	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J
R231	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J	R652	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J
R237	NRSA63J-392X	MG RESISTOR	3.9kΩ 1/16W J	R653	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J
R238	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	R654	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J
R241	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	R655	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R243	NRSA63J-152X	MG RESISTOR	1.5kΩ 1/16W J	R657	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R281	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J	R659	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R282	NRSA63J-392X	MG RESISTOR	3.9kΩ 1/16W J	R700	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R283	NRSA63J-681X	MG RESISTOR	680Ω 1/16W J	R701	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R286	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	R702	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R287	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R704	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J
R288	NRSA02J-471X	MG RESISTOR	470Ω 1/10W J	R705	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J
R289	NRSA63J-154X	MG RESISTOR	150kΩ 1/16W J	R706	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J
R290	NRSA02J-561X	MG RESISTOR	560Ω 1/10W J	R707	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R292	NRSA63J-124X	MG RESISTOR	120kΩ 1/16W J	R708	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R293	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J	R709	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R296	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R718	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R297	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R721	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R298	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R729	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J
R301	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	R731	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R302	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	R732	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R303	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	R733	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J
R304	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R734	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J
				R739	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J

△Ref No.	Part No.	Part Name	Description Local
R740	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R764	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J
R765	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J
R766	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J
R767	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J
R769	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J
R772	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R811	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R816	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R827	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R839	NRSA63J-225X	MG RESISTOR	2.2MΩ 1/16W J
R855	QRL029J-820	OMF RESISTOR	82Ω 2W J
R857	QRL029J-820	OMF RESISTOR	82Ω 2W J
R901	QRF074K-1R2	UNF WW RESISTOR	1.2Ω 7W K
R909	QRG01GJ-470	OMF RESISTOR	47Ω 1W J
R911	QRE121J-223Y	C RESISTOR	22kΩ 1/2W J
R912	QRT029J-R18	MF RESISTOR	0.18Ω 2W J
R913	QRT029J-R15	MF RESISTOR	0.15Ω 2W J
△R914	QRK126J-681X	UNF C RESISTOR	680Ω 1/2W J
△R915	QRK129J-6R8	UNF C RESISTOR	6.8Ω 1/2W J
△R917	QRK126J-332X	UNF C RESISTOR	3.3kΩ 1/2W J
R918	QRE121J-222Y	C RESISTOR	2.2kΩ 1/2W J
R919	QRE121J-684Y	C RESISTOR	680kΩ 1/2W J
R924	QRE121J-222Y	C RESISTOR	2.2kΩ 1/2W J
R930	QRE121J-223Y	C RESISTOR	22kΩ 1/2W J
R933	QRX01GJ-1R0	MF RESISTOR	1Ω 1W J
R940	QRE121J-181Y	C RESISTOR	180Ω 1/2W J
R941	QRL029J-183	OMF RESISTOR	18kΩ 2W J
R950	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R951	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
R952	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R953	QRE121J-820Y	C RESISTOR	82Ω 1/2W J
R972	NRVA02D-102X	CMF RESISTOR	1kΩ 1/10W D
R973	NRVA02D-332X	CMF RESISTOR	3.3kΩ 1/10W D
R975	QRE121J-223Y	C RESISTOR	22kΩ 1/2W J
R977	QRE121J-473Y	C RESISTOR	47kΩ 1/2W J
R978	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J
△R998	QRZ904I-275	C RESISTOR	2.7MΩ 1/2W K
R999	QRE121J-121Y	C RESISTOR	120Ω 1/2W J
L001	QQL244K-220Z	PEAKING COIL	22uH K
L232	QQL244K-560Z	PEAKING COIL	56uH K
L241	QQL244K-220Z	PEAKING COIL	22uH K
L391	QQL244K-220Z	PEAKING COIL	22uH K
L511	QQR1165-001	LINEARITY COIL	
L512	QQLZ036-821	COIL	820uH K
L521	QQLZ026-860	COIL	86uH ±7%
L701	QQL244K-220Z	PEAKING COIL	22uH K
L702	QQL244K-220Z	PEAKING COIL	22uH K
L703	QQL244K-220Z	PEAKING COIL	22uH K
L704	QQL244K-220Z	PEAKING COIL	22uH K
L705	QQL244K-220Z	PEAKING COIL	22uH K
L931	QQL26AK-470Z	CHOKE COIL	47uH K
L933	QQL26AK-470Z	CHOKE COIL	47uH K
L937	QQL26AK-470Z	CHOKE COIL	47uH K
L940	QQR0582-001Z	FERRITE BEADS	
T501	QQR1414-001	DRIVE TRANSF	
△T921	QQS0152-001	SW TRANSF	
△T951	QQT0355-001	POWER TRANSF	
CN001	QGB1505J1-35	CONNECTOR	B-B (1-35)
CN0E1	CE41507-001P	LV CONNECTOR	
CN0E3	CE41507-001P	LV CONNECTOR	
CN0HV	GGZ5004C1-06	CONNECTOR	(1-6)
△CN0PW	QMPD390-200-JS	POWER CORD(US/CA)	2m BLACK
△CP936	ICP-N70-T	IC PROTECTOR	2.5A
△F901	QMF51N1-5R0-J5	FUSE	5A AC125V
△FR525	QRZ9017-4R7	FUSI RESISTOR	4.7Ω 1/4W J
J601	QNN0349-002	PIN JACK	COMPONENT IN
K401	QQR0621-002Z	FERRITE BEADS	
K912	QQR0582-001Z	FERRITE BEADS	
K916	QQR0582-001Z	FERRITE BEADS	
K917	QQR0582-001Z	FERRITE BEADS	
K918	QQR0582-001Z	FERRITE BEADS	
K920	QQR1139-001	FERRITE BEADS	
K931	QQR0582-001Z	FERRITE BEADS	
K932	QQR0582-001Z	FERRITE BEADS	
K933	QQR0582-001Z	FERRITE BEADS	
K935	QQR0582-001Z	FERRITE BEADS	
K937	QQR0582-001Z	FERRITE BEADS	
LC601	QQR1199-001	EMI FILTER	
LC602	QQR1199-001	EMI FILTER	
LC603	QQR1199-001	EMI FILTER	
△LF901	QQR0527-003	LINE FILTER	
△LF902	QQR0527-003	LINE FILTER	
△RY951	QSK0085-001	RELAY	
S421	QSL4A13-C02	LEVER SWITCH	V.CENTER

△Ref No.	Part No.	Part Name	Description Local
△TH901	QAD0132-3R0	P THERMISTOR	3Ω
△TU001	QAU0352-002	TUNER	
△VA901	ERZV10V621CS	ZNR	
X701	QAX0767-001Z	CRYSTAL	8MHz

## CRT SOCKET P.W. BOARD ASS'Y (SGJ-3522A-M2)

△Ref No.	Part No.	Part Name	Description Local
Q3103	2SC3928A/QR/-X	TRANSISTOR	
Q3107	2SA2005/DE/-	POW TRANSISTOR	
Q3108	2SC5511/DE/-	POW TRANSISTOR	
Q3109	2SC3928A/QR/-X	TRANSISTOR	
Q3304	2SC4544-LB	POW TRANSISTOR	
Q3305	2SC4544-LB	POW TRANSISTOR	
Q3306	2SC4544-LB	POW TRANSISTOR	
Q3351	2SA1530A/QR/-X	TRANSISTOR	
D3105	RH1S-T3	SI DIODE	
D3106	RH1S-T3	SI DIODE	
D3331	1SS133-T2	SI DIODE	
D3351	1SS133-T2	SI DIODE	
D3352	1SS133-T2	SI DIODE	
D3353	1SS133-T2	SI DIODE	
D3354	1SS133-T2	SI DIODE	
C3101	QETN1HM-106Z	E CAPACITOR	10uF 50V M
C3113	QETN2CM-106Z	E CAPACITOR	10uF 160V M
C3114	QCB32HK-472Z	C CAPACITOR	4700pF 500V K
C3115	QCB32HK-472Z	C CAPACITOR	4700pF 500V K
C3117	QETN2CM-106Z	E CAPACITOR	10uF 160V M
C3118	QETN0JM-107Z	E CAPACITOR	100uF 6.3V M
C3119	QETN1AM-107Z	E CAPACITOR	100uF 10V M
C3120	QETN1AM-337Z	E CAPACITOR	330uF 10V M
C3121	QCS32HJ-151Z	C CAPACITOR	150pF 500V J
C3127	NDC31HJ-471X	C CAPACITOR	470pF 50V J
C3301	NDC31HJ-561X	C CAPACITOR	560pF 50V J
C3302	NDC31HJ-391X	C CAPACITOR	390pF 50V J
C3303	NDC31HJ-561X	C CAPACITOR	560pF 50V J
C3323	QETN1CM-477Z	E CAPACITOR	470uF 16V M
C3331	NDC31HJ-181X	C CAPACITOR	180pF 50V J
C3332	NDC31HJ-181X	C CAPACITOR	180pF 50V J
C3333	NDC31HJ-181X	C CAPACITOR	180pF 50V J
C3351	QETN1CM-227Z	E CAPACITOR	220uF 16V M
C3363	QCZ0121-102	C CAPACITOR	1000pF 3KV Z
R3115	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J
R3116	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J
R3122	QRT029J-R15	MF RESISTOR	0.15Ω 2W J
R3123	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J
R3124	NRSA63J-820X	MG RESISTOR	82Ω 1/16W J
R3125	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J
R3126	NRSA63J-563X	MG RESISTOR	56kΩ 1/16W J
R3127	NRSA63J-563X	MG RESISTOR	56kΩ 1/16W J
R3128	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J
R3129	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J
R3130	NRSA63J-820X	MG RESISTOR	82Ω 1/16W J
R3131	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J
R3132	QRL029J-391	OMF RESISTOR	390Ω 2W J
R3134	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J
R3136	NRSA63J-392X	MG RESISTOR	3.9kΩ 1/16W J
R3139	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J
R3142	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J
R3143	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J
R3144	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R3145	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J
R3146	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J
R3148	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R3301	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J
R3302	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J
R3303	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J
R3304	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J
R3305	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J
R3306	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J
R3307	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J
R3308	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J
R3309	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J
R3310	QRL029J-183	OMF RESISTOR	18kΩ 2W J
R3311	QRL029J-183	OMF RESISTOR	18kΩ 2W J
R3312	QRL029J-183	OMF RESISTOR	18kΩ 2W J
R3313	QRL029J-223	OMF RESISTOR	22kΩ 2W J
R3314	QRL029J-223	OMF RESISTOR	22kΩ 2W J
R3315	QRL029J-223	OMF RESISTOR	22kΩ 2W J



△Ref No.	Part No.	Part Name	Description Local
R3325	QRZ0107-102Z	C RESISTOR	1kΩ 1/2W K
R3326	QRZ0107-102Z	C RESISTOR	1kΩ 1/2W K
R3327	QRZ0107-102Z	C RESISTOR	1kΩ 1/2W K
R3331	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J
R3332	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J
R3333	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J
R3334	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J
R3335	NRSA63J-391X	MG RESISTOR	390Ω 1/16W J
R3351	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J
R3354	NRSA63J-561X	MG RESISTOR	560Ω 1/16W J
R3355	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
L3304	QQL244K-470Z	PEAKING COIL	47uH K
CN3004	QJB003-074022	SIN ID C-B WIRE	
CN3005	WJA0029-002A	E-SI ID WIRE	
CN30E2	QUB130-46A6AS	SIN TWIST WIRE	
CN30E4	QUB130-46A6AS	SIN TWIST WIRE	
K3104	QQR1114-001Z	FERRITE BEADS	
K3105	QQR1114-001Z	FERRITE BEADS	
△SK3001	QNZ0536-001	CRT SOCKET	

### AV SELECTOR P.W. BOARD ASS'Y (SGJ-5521A-M2)

REFER TO PARTS LIST IN PAGE 3-9 FOR THIS P.W. BOARD.


### FRONT CONTROL P.W. BOARD ASS'Y (SGJ-6521A-M2)

REFER TO PARTS LIST IN PAGE 3-10 FOR THIS P.W. BOARD.


### LED & POWER SW P.W. BOARD ASS'Y (SGJ-7521A-M2)

REFER TO PARTS LIST IN PAGE 3-10 FOR THIS P.W. BOARD.



# REMOTE CONTROL UNIT PARTS LIST (RM-C1258G-1H)

 Ref No.	Part No.	Part Name	Description	Local
	UR77EC0603B	BATTERY COVER		
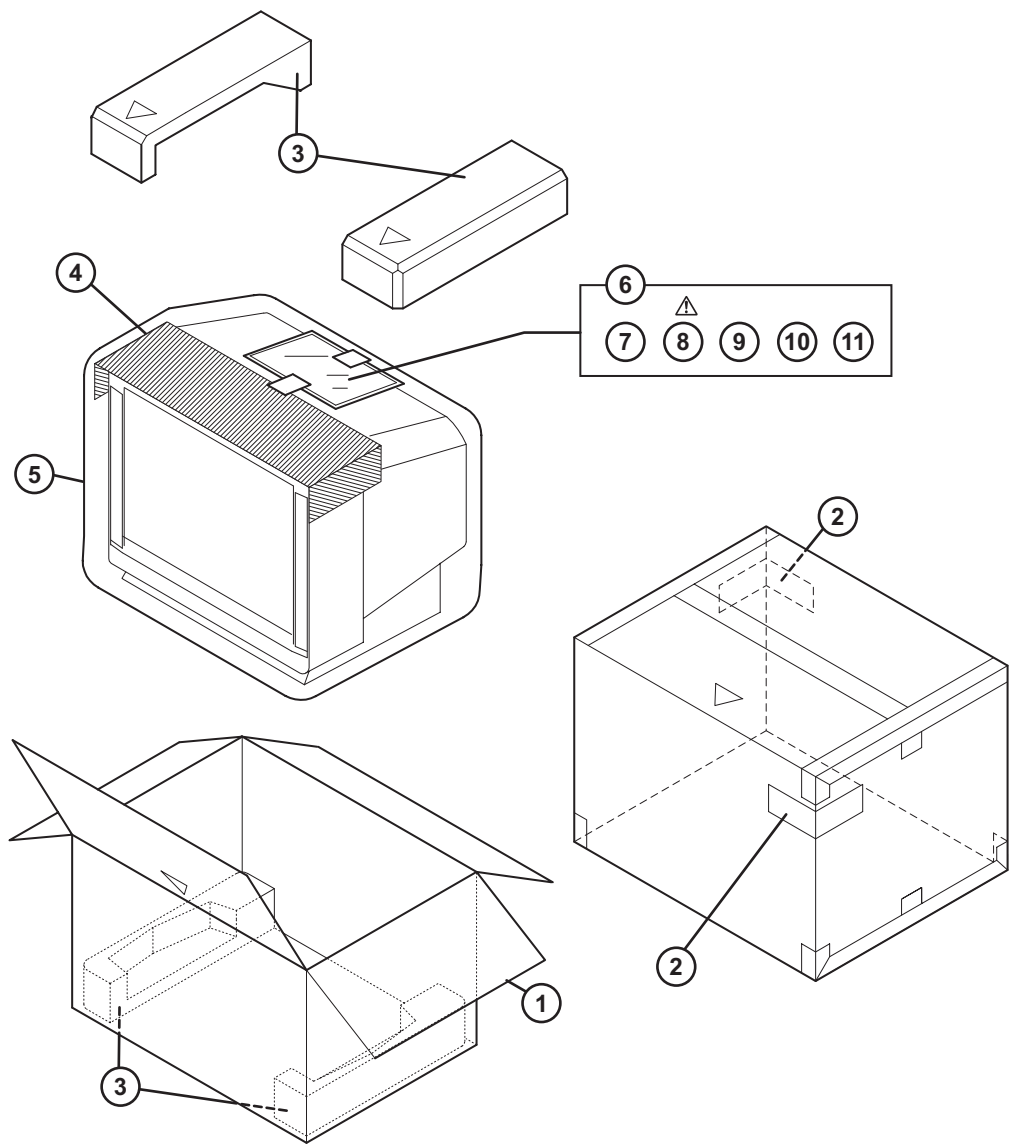
## PACKING



## PACKING PARTS LIST

 Ref.No.	Part No.	Part Name	Description	Local
1	LC10181-032A-A	PACKING CASE		AV-27F476/R,AV-27F476/S
1	LC10181-033B-A	PACKING CASE		AV-32F476/Y,AV-32F476/Z
2	CM36616-001-A	CORNER LABEL	2pcs in 1set	
3	LC11575-002C-A	CUSHION	4pcs in 1set	AV-27F476/R,AV-27F476/S
3	LC11560-002F-A	CUSHION	4pcs in 1set	AV-32F476/Y,AV-32F476/Z
4	CP30055-A02-A	TOP COVER		
5	CP30056-A04-A	POLY BAG		
6	QPA02503505	POLY BAG	25cm x 35cm	
7	RM-C1258G-1H	REMOCON		
 8	LCT1785-001A-A	INST BOOK	English/French	
9	BT-51034-2Q	REGIST. CARD		
10	-----	WARRANTY CARD	BT-52006-2Q	
11	-----	BATTERY	R6P/AA(x2)	

# JVC

## SCHEMATIC DIAGRAMS

COLOUR TELEVISION

**AV-27F476/R, AV-27F476/S,  
AV-32F476/Y, AV-32F476/Z**

CD-ROM No.SML200502

BASIC CHASSIS
GJ5

*I'Art*™  
**BBE**



# AV-27F476/R, AV-27F476/S, AV-32F476/Y, AV-32F476/Z

## STANDARD CIRCUIT DIAGRAM

### ■ NOTE ON USING CIRCUIT DIAGRAMS

#### 1.SAFETY

The components identified by the  $\triangle$  symbol and shading are critical for safety. For continued safety replace safety critical components only with manufactures recommended parts.

#### 2.SPECIFIED VOLTAGE AND WAVEFORM VALUES

The voltage and waveform values have been measured under the following conditions.

- (1)Input signal : Colour bar signal
- (2)Setting positions of each knob/button and variable resistor : Original setting position when shipped
- (3)Internal resistance of tester : DC 20k $\Omega$ /V
- (4)Oscilloscope sweeping time : H  $\Rightarrow$  20 $\mu$ s / div  
: V  $\Rightarrow$  5ms / div  
: Others  $\Rightarrow$  Sweeping time is specified
- (5)Voltage values : All DC voltage values

\* Since the voltage values of signal circuit vary to some extent according to adjustments, use them as reference values.

#### 3.INDICATION OF PARTS SYMBOL [EXAMPLE]

- In the PW board : R1209  $\rightarrow$  R209

#### 4.INDICATIONS ON THE CIRCUIT DIAGRAM

##### (1)Resistors

###### ● Resistance value

- No unit : [ $\Omega$ ]
- K : [k $\Omega$ ]
- M : [M $\Omega$ ]

###### ● Rated allowable power

- No indication : 1/16 [W]
- Others : As specified

###### ● Type

- No indication : Carbon resistor
- OMR : Oxide metal film resistor
- MFR : Metal film resistor
- MPR : Metal plate resistor
- UNFR : Uninflamable resistor
- FR : Fusible resistor

\* Composition resistor 1/2 [W] is specified as 1/2S or Comp.

##### (2)Capacitors

###### ● Capacitance value

- 1 or higher : [pF]
- less than 1 : [ $\mu$ F]

###### ● Withstand voltage

- No indication : DC50[V]
- Others : DC withstand voltage [V]
- AC indicated : AC withstand voltage [V]

\* Electrolytic Capacitors

47/50[Example]: Capacitance value [ $\mu$ F]/withstand voltage[V]

###### ●Type

- No indication : Ceramic capacitor
- MM : Metalized mylar capacitor
- PP : Polypropylene capacitor
- MPP : Metalized polypropylene capacitor
- MF : Metalized film capacitor
- TF : Thin film capacitor
- BP : Bipolar electrolytic capacitor
- TAN : Tantalum capacitor

##### (3)Coils

- No unit : [ $\mu$ H]
- Others : As specified

##### (4)Power Supply




-  : B1
-  : B2 (12V)
-  : 9V
-  : 5V

\* Respective voltage values are indicated





##### (5)Test point

-  : Test point
-  : Only test point display



##### (6)Connecting method

-  : Connector
-  : Wrapping or soldering
-  : Receptacle

##### (7)Ground symbol

-  : LIVE side ground
-  : ISOLATED(NEUTRAL) side ground
-  : EARTH ground
-  : DIGITAL ground

#### 5.NOTE FOR REPAIRING SERVICE

This model's power circuit is partly different in the GND. The difference of the GND is shown by the LIVE : () side GND and the ISOLATED(NEUTRAL) : () side GND. Therefore, care must be taken for the following points.

- (1)Do not touch the LIVE side GND or the LIVE side GND and the ISOLATED(NEUTRAL) side GND simultaneously. if the above caution is not respected, an electric shock may be caused. Therefore, make sure that the power cord is surely removed from the receptacle when, for example, the chassis is pulled out.
- (2)Do not short between the LIVE side GND and ISOLATED(NEUTRAL) side GND or never measure with a measuring apparatus measure with a measuring apparatus ( oscilloscope, etc.) the LIVE side GND and ISOLATED(NEUTRAL) side GND at the same time. If the above precaution is not respected, a fuse or any parts will be broken.

◆ Since the circuit diagram is a standard one, the circuit and circuit constants may be subject to change for improvement without any notice.

##### NOTE

◆ Due improvement in performance, some part numbers show in the circuit diagram may not agree with those indicated in the part list.

When ordering parts, please use the numbers that appear in the Parts List.

# CONTENTS







SEMICONDUCTOR SHAPES .....	2-2
BLOCK DIAGRAM .....	2-3
CIRCUIT DIAGRAMS .....	2-5
MAIN PWB CIRCUIT DIAGRAM .....	2-5
AV SELECTOR PWB CIRCUIT DIAGRAM .....	2-9
FRONT CONTROL PWB CIRCUIT DIAGRAM .....	2-9
LED & POWER SWITCH PWB CIRCUIT DIAGRAM .....	2-9
CRT SOCKET PWB CIRCUIT DIAGRAM .....	2-11
PATTERN DIAGRAMS .....	2-13
MAIN PWB PATTERN .....	2-13
AV SELECTOR PWB PATTERN .....	2-15
FRONT CONTROL PWB PATTERN .....	2-16
LED & POWER SWITCH PWB PATTERN .....	2-16
CRT SOCKET PWB PATTERN .....	2-15

## USING P.W. BOARD






PWB ASS'Y name	AV-27F476/R	AV-27F476/S	AV-32F476/Y	AV-32F476/Z
MAIN P.W. BOARD	SGJ-1580A-M2	SGJ-1579A-M2	SGJ-1572A-M2	SGJ-1575A-M2
CRT SOCKET P.W. BOARD	SGJ-3523A-M2	←	SGJ-3521A-M2	SGJ-3522A-M2
AV SELECTOR P.W. BOARD	SGJ-5521A-M2	←	←	←
FRONT CONTROL P.W. BOARD	SGJ-6521A-M2	←	←	←
LED & POWER SWITCH P.W. BOARD	SGJ-7521A-M2	←	←	←

## SEMICONDUCTOR SHAPES



### TRANSISTOR

BOTTOM VIEW	FRONT VIEW				TOP VIEW
					


### IC


BOTTOM VIEW	FRONT VIEW			TOP VIEW
				

### CHIP IC

TOP VIEW		
		

# BLOCK DIAGRAM


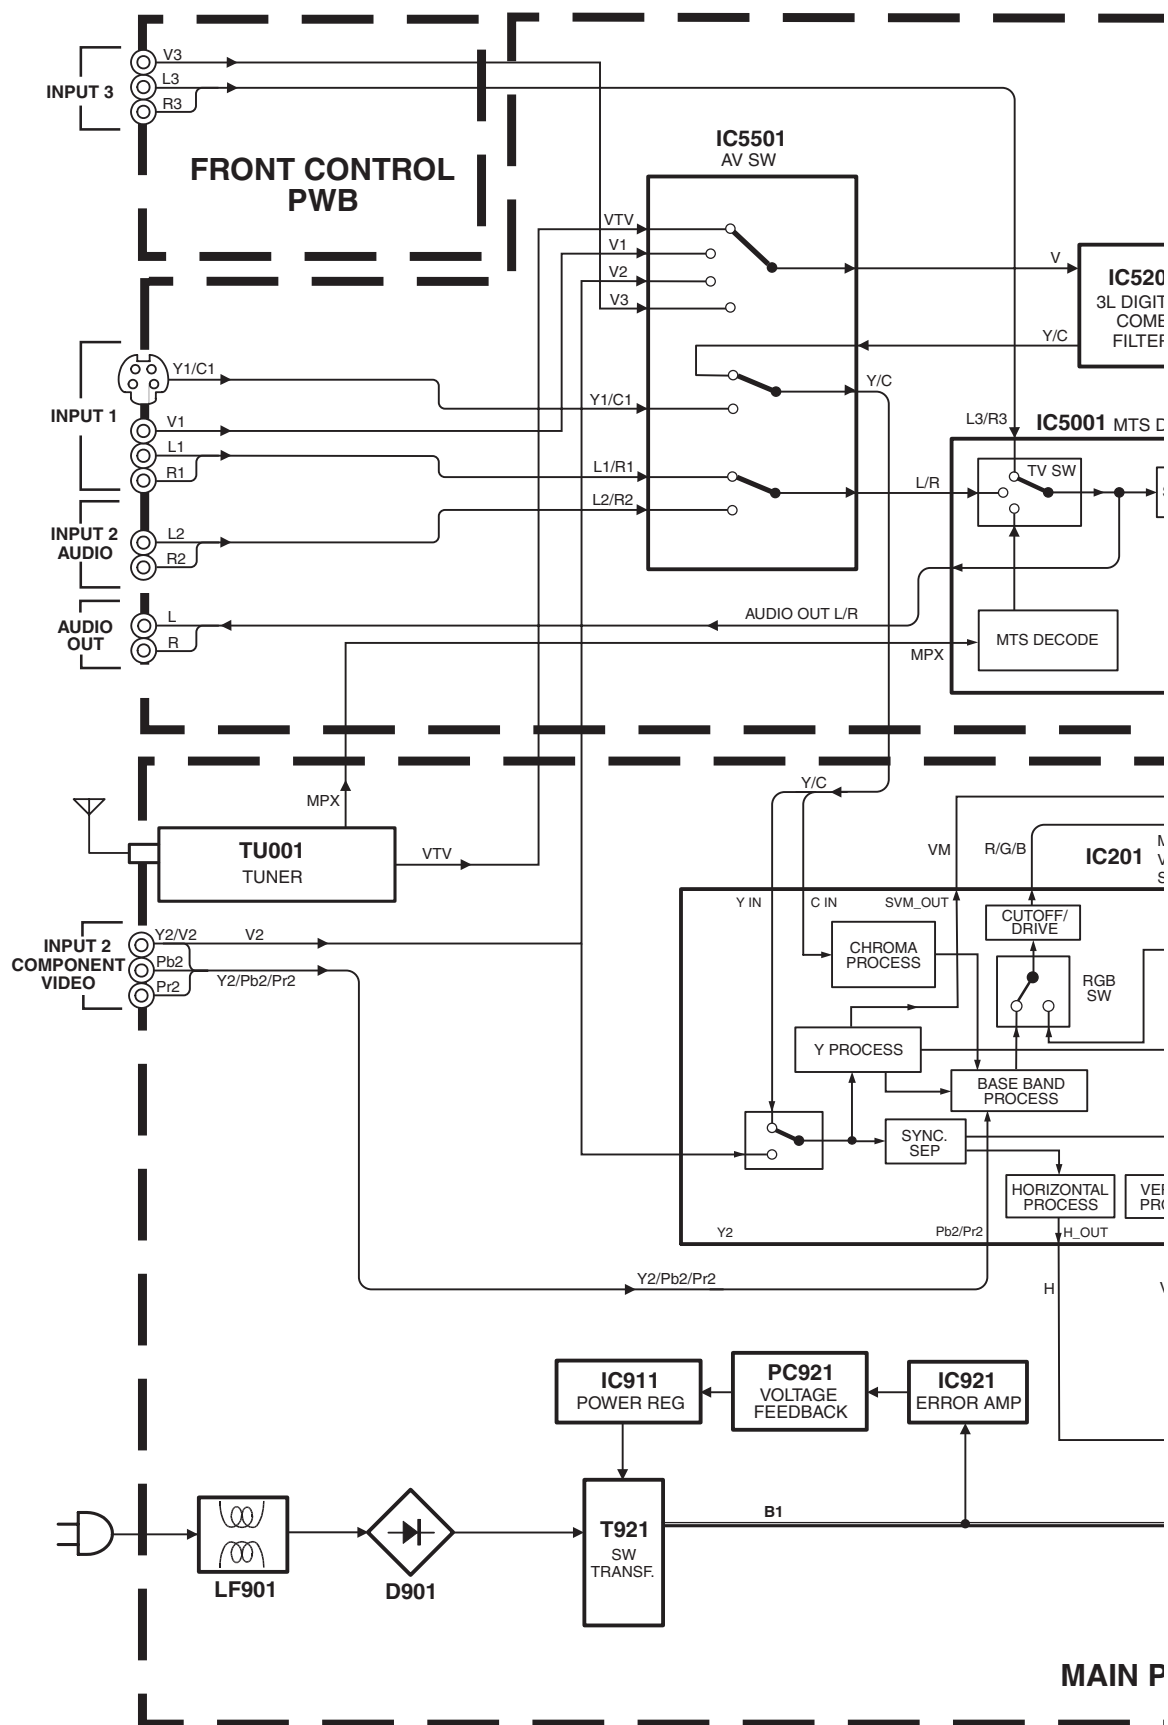


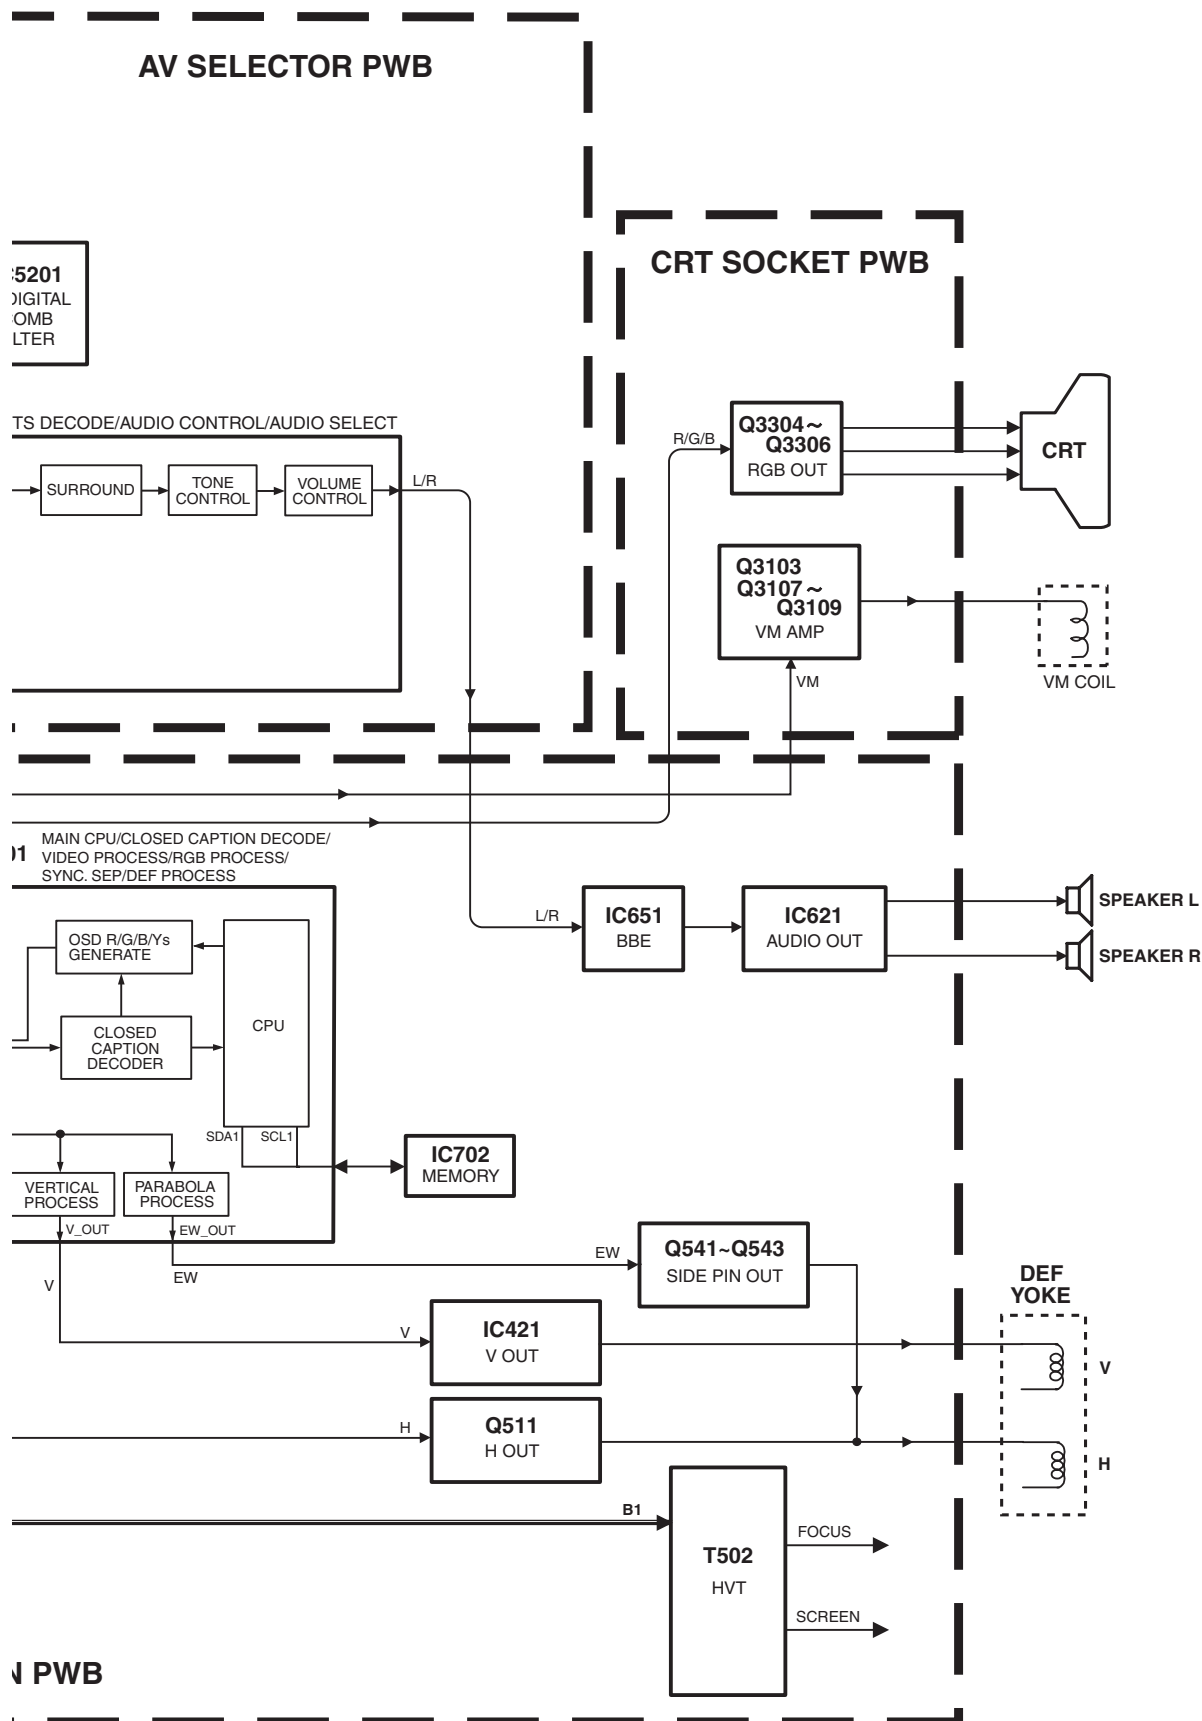

MAIN PWB CIRCUIT DIAGRAM (1/2) SHEET1







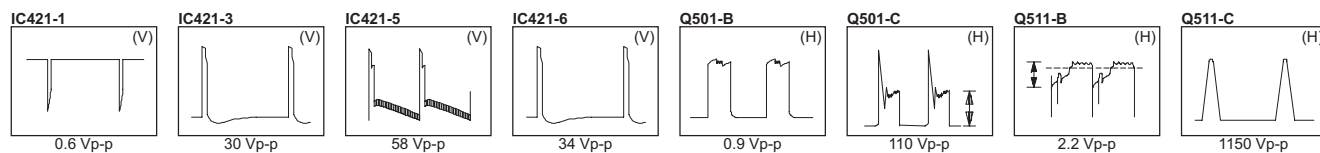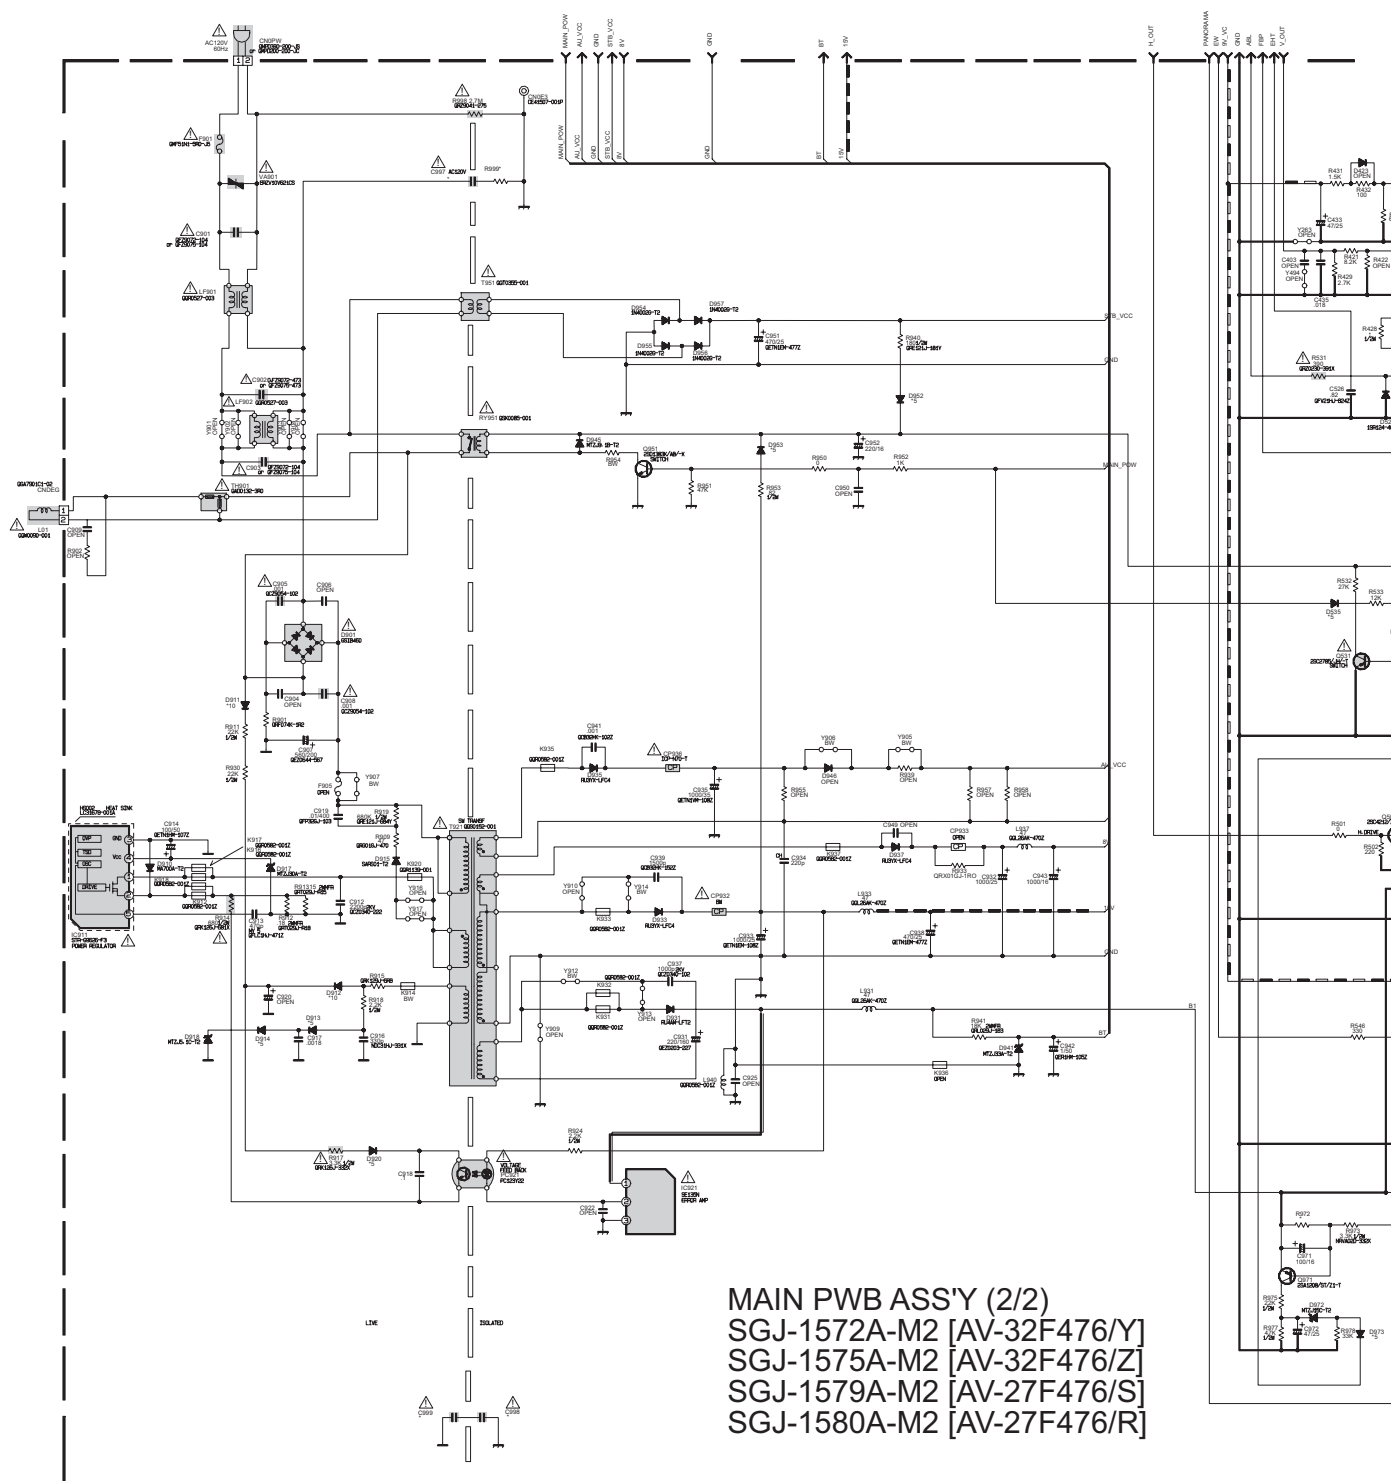



# AV SELECTOR, FRONT CONTROL AND LED & POWER SWITCH PWB CIRCUIT DIAGRAM SHEET 3

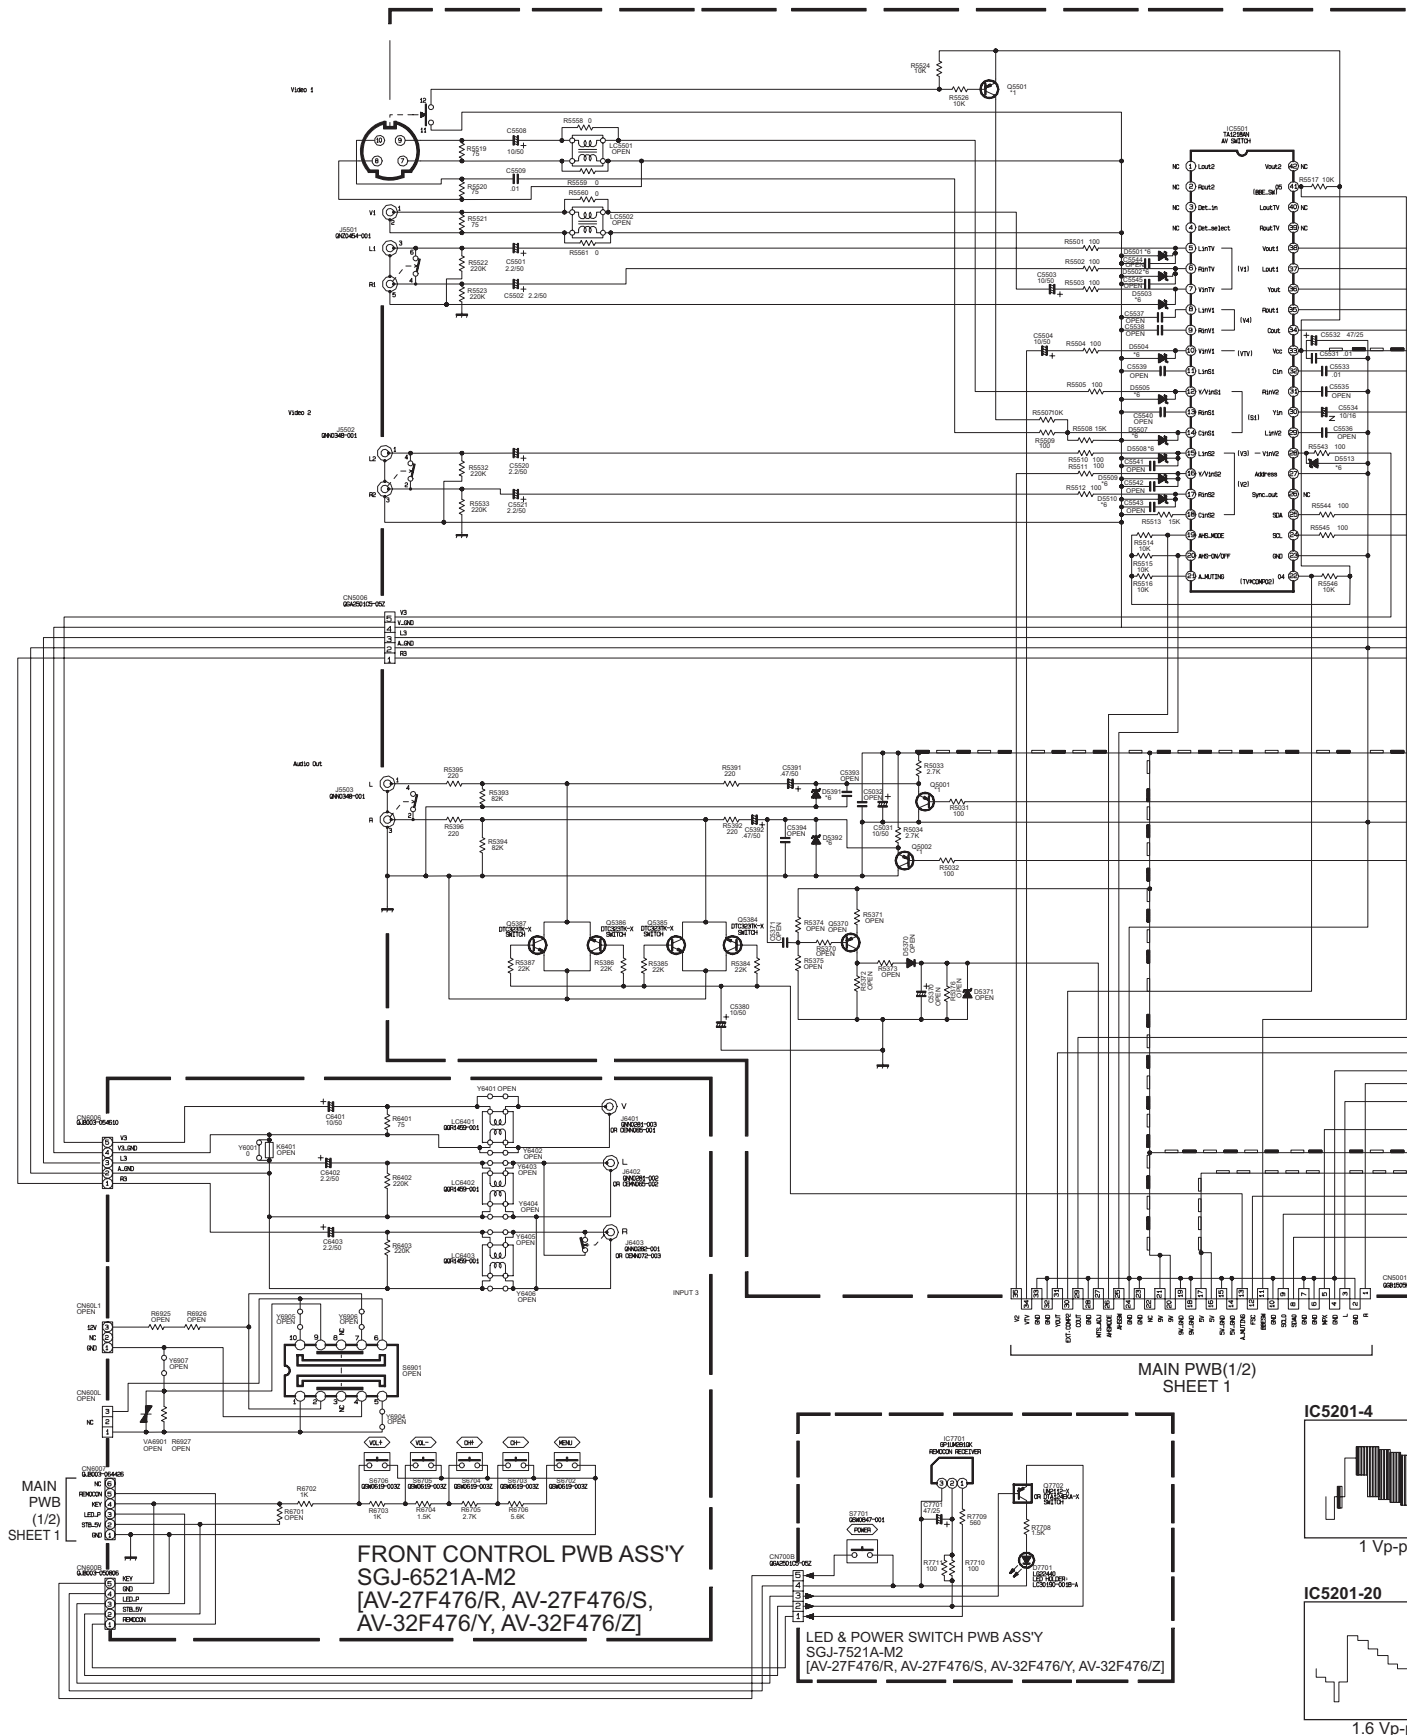

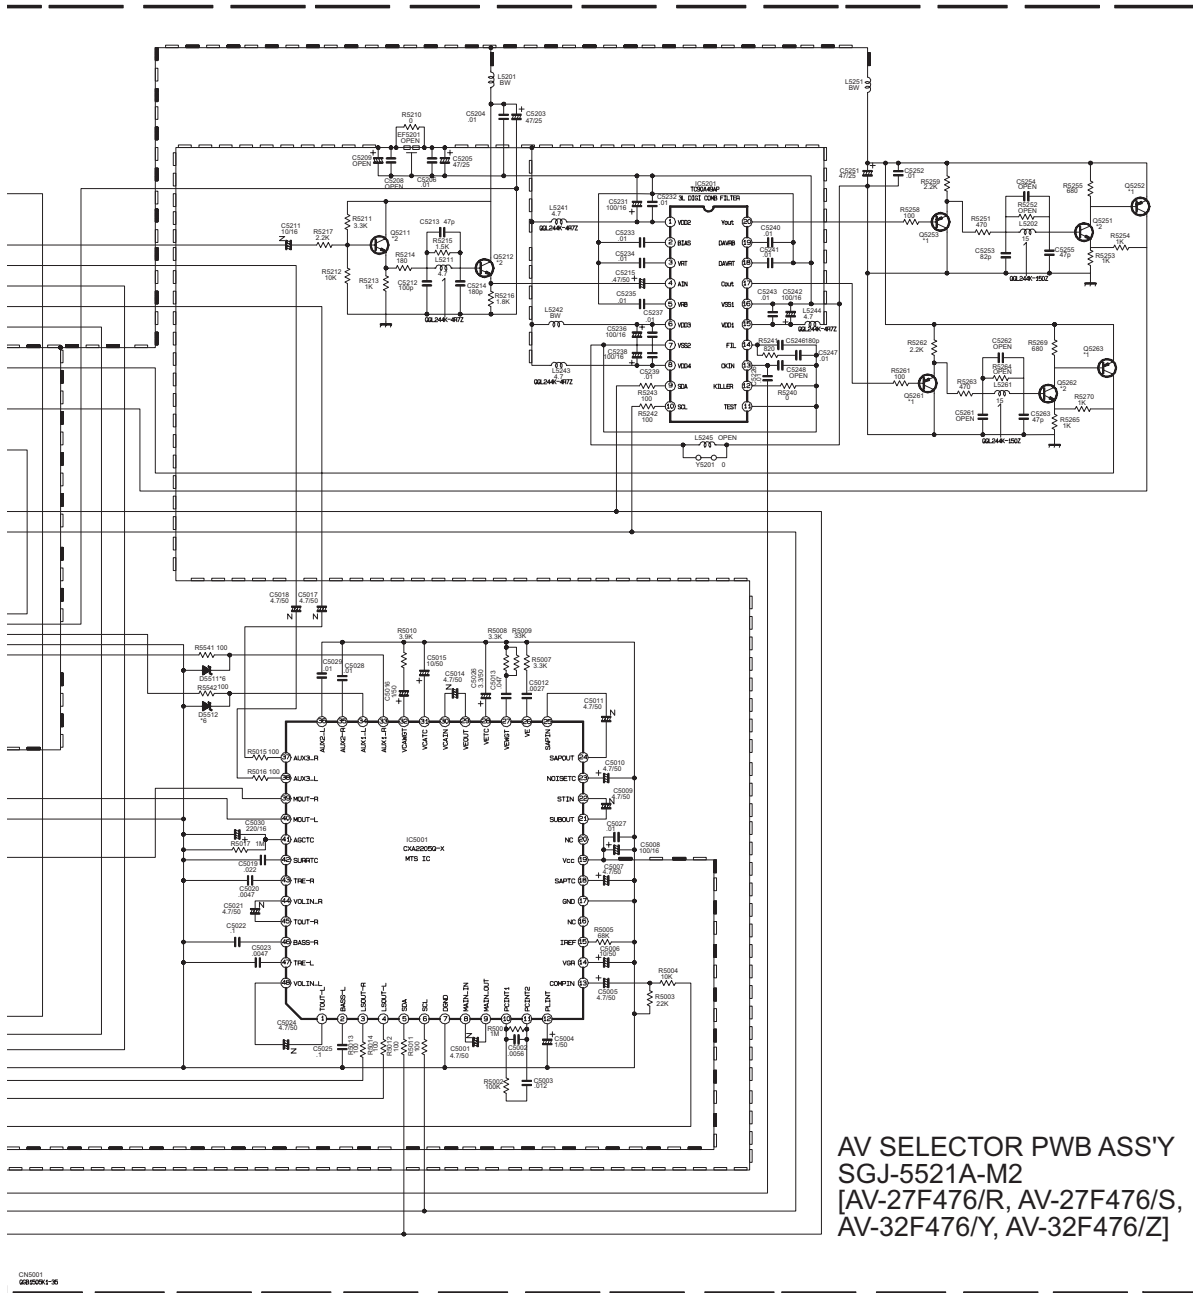


AV SELECTOR PWB ASS'Y  
SGJ-5521A-M2  
[AV-27F476/R, AV-27F476/S,  
AV-32F476/Y, AV-32F476/Z]


MODE	PIN NO.	DC (V)	MODE	PIN NO.	DC (V)
IC5001	1	4	Q5001	E	4.7
	2	4.1		C	0
	3	4		B	4
	4	4		Q5002	
	5	3.9		E	4.7
	6	3.7		C	0
	7	0		B	4
	8	4		Q5211	
	9	4		E	5.9
	10	4		C	8.8
	11	3.9		B	6.6
	12	5.1		Q5212	
	13	4		E	5.2
	14	1.2		C	8.8
	15	0		B	5.9
	16	0		Q5251	
	17	0		E	2.4
	18	3		C	8.1
	19	8.8		B	3
	20	0		Q5252	
IC5201	21	0		E	8.8
	22	4		C	3.9
	23	4.1		B	8.1
	24	3.8		Q5253	
	25	4		E	3
	26	3.9		C	0
	27	4		B	2.3
	28	1.7		Q5261	
	29	4		E	3
	30	4		C	0
	31	1.6		B	2.3
	32	4		Q5262	
	33	4		E	2.4
	34	4		C	8.1
	35	4		B	3
	36	4		Q5263	
	37	4		E	8.8
	38	4		C	3.9
	39	4		B	8.1
	40	4		Q5384	
IC5501	41	0.6		E	0
	42	4		C	0
	43	0		B	0
	44	4		Q5385	
	45	4		E	0
	46	0		C	0
	47	4		B	0
	48	4		Q5386	
	1	4.5		E	0
	2	1.3		C	0
	3	3.1		B	0
	4	2.3		Q5387	
	5	1.8		E	0
	6	4.9		B	0
	7	0		Q5501	
	8	4.9		E	8.8
	9	3.9		C	1.7
	10	3.7		B	8.8
	11	0		IC7701	
	12	0		1	4.9
	13	2.5		2	5
	14	1.8		3	0
	15	4.9		Q7702	
	16	0		E	5.6
	17	2.3		C	5
	18	3.1		B	0
	19	1.8			
	20	2.3			
IC5501	1	3.8			
	2	3.8			
	3	6.4			
	4	3.6			
	5	5.1			
	6	5.1			
	7	5.1			
	8	5.1			
	9	5.1			
	10	5.1			
	11	5.1			
	12	5.1			
	13	5.1			
	14	1.7			
	15	5.1			
	16	5.1			
	17	5.1			
	18	1.7			
	19	0.1			
	20	0.1			
	21	0			
	22	0.1			
	23	0			
	24	3.7			
	25	3.9			
	26	0.7			
	27	0			
	28	5.1			
	29	5.1			
	30	5.1			
	31	5.1			
	32	5			
	33	8.8			
	34	3.6			
	35	3.8			
	36	3.6			
	37	3.8			
	38	4.3			
	39	3.8			
	40	3.8			
	41	8.2			
	42	4.3			

NOTE

- \*1 : CHIP PNP T<sub>1</sub> 2SA1530A/GR/-X OR 2SB709A/GR/-X BW : BUS WIRE
- \*2 : CHIP NPN T<sub>1</sub> 2SC3928A/GR/-X OR 2SC601A/GR/-X X : NON-MOUNT (OPEN)
- \*3 : CHIP PNP D-T<sub>1</sub> DTA1246KA-X OR UN2112-X Δ : SAFETY PARTS
- \*4 : CHIP NPN D-T<sub>1</sub> DTC1246KA-X OR UN2212-X ○ : 0 Ω RESISTOR
- \*5 : SI DIODE 1S9133-T2
- \*6 : ZENER DIODE MTZJ9-10-T2
- \*7 : ZENER DIODE MTZJ5-BA-T2
- \*8 : SI DIODE RGP10J-04T5-T3 OR RGP10J-5025-T3
- \*9 : SI DIODE 1SR35-400A-T2 OR GP100E-5009-T2
- \* : DIFFERENCE PARTS

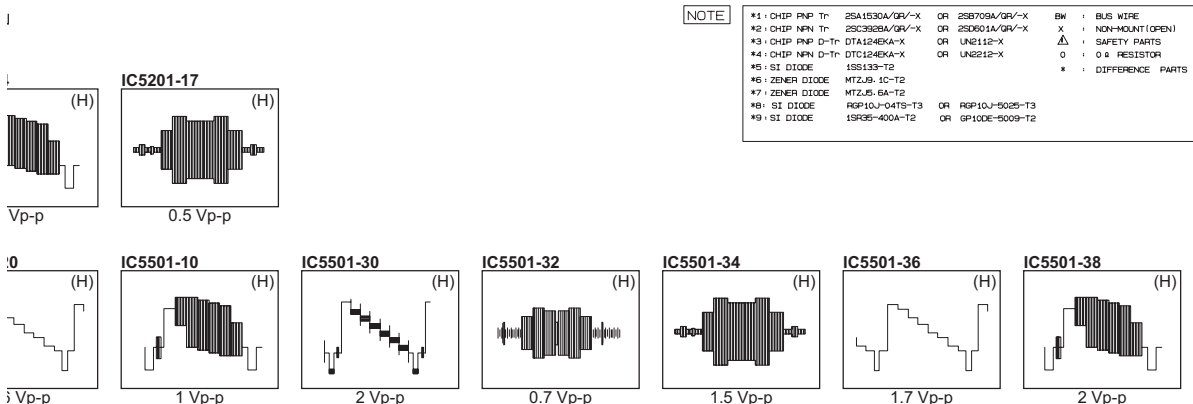

CRT SOCKET PWB CIRCUIT DIAGRAM SHEET 4

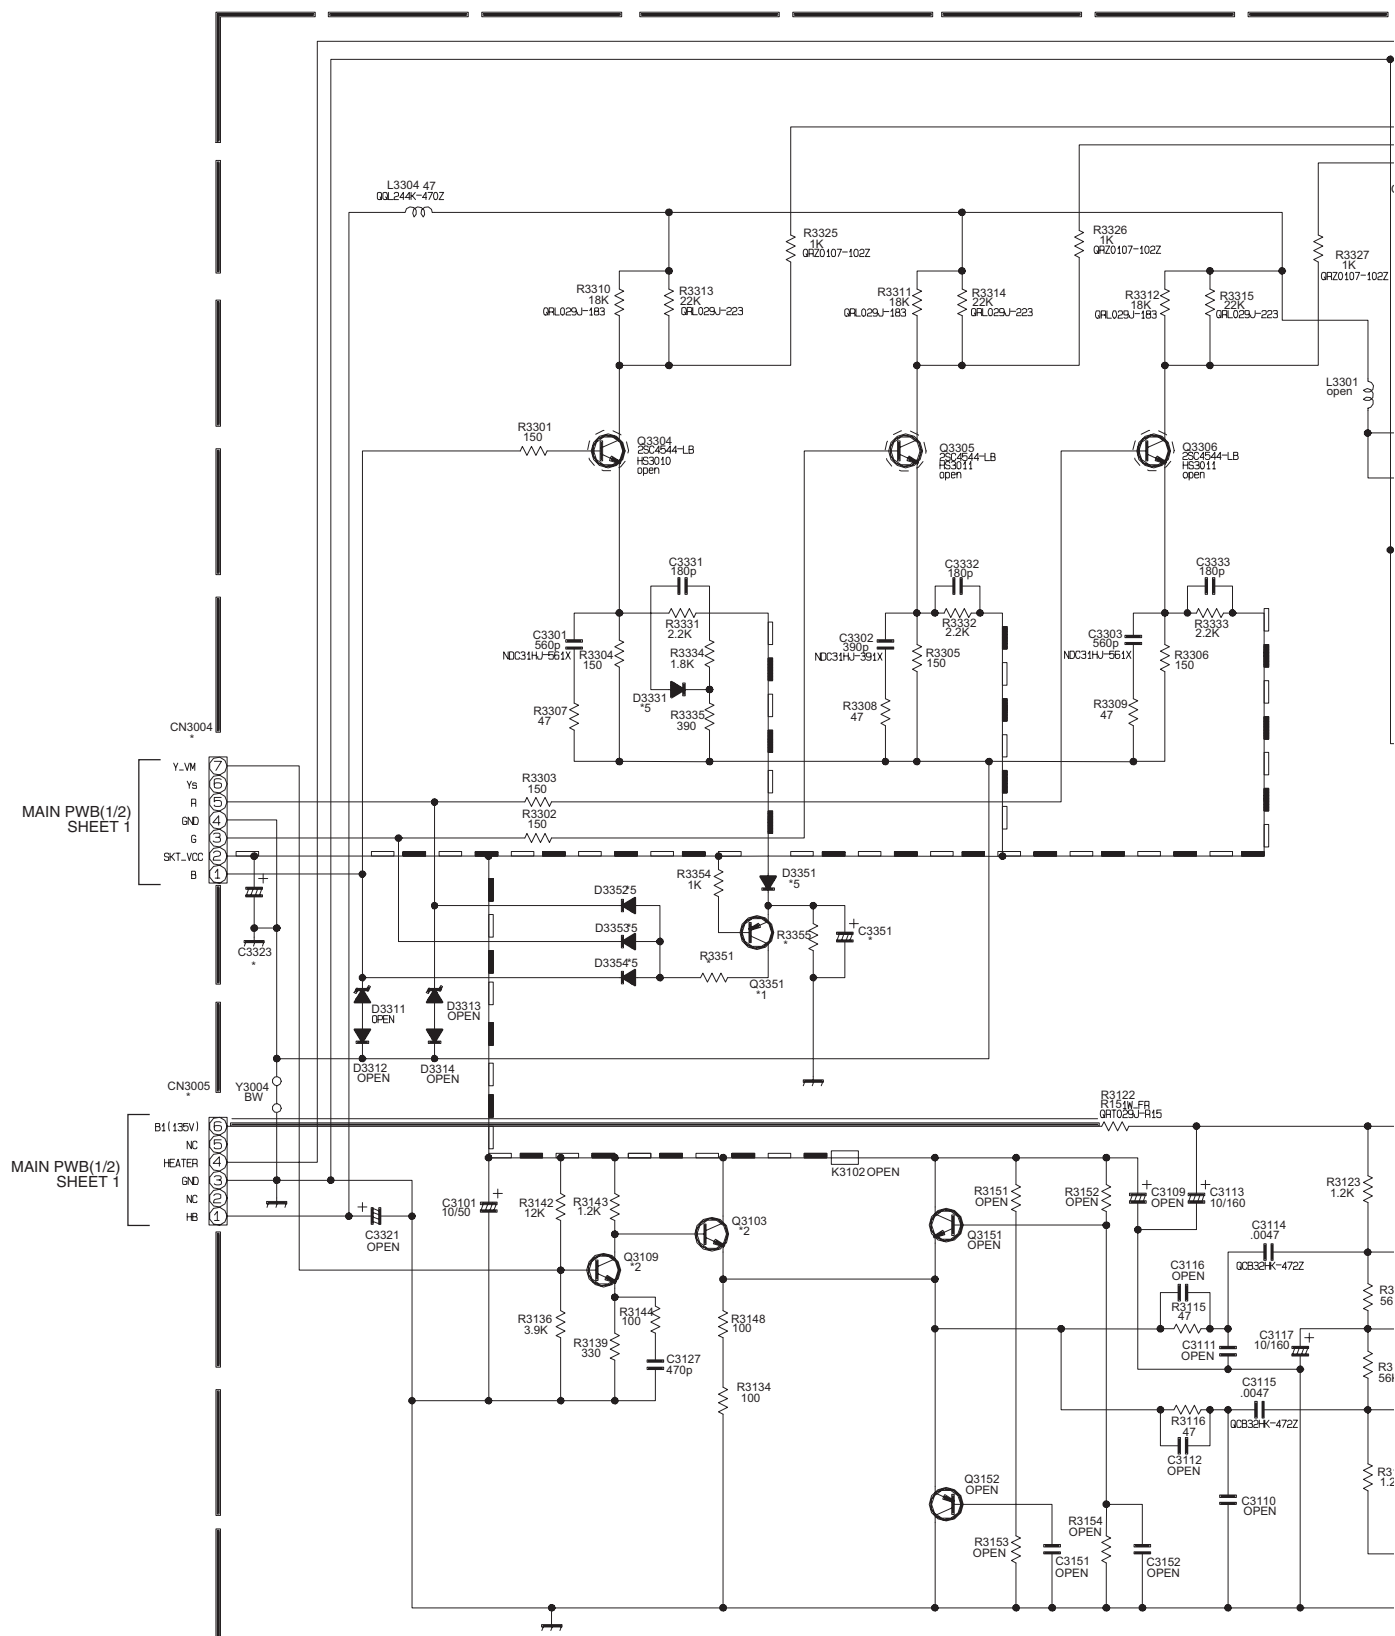







# PATTERN DIAGRAMS

## MAIN PWB PATTERN


FRONT

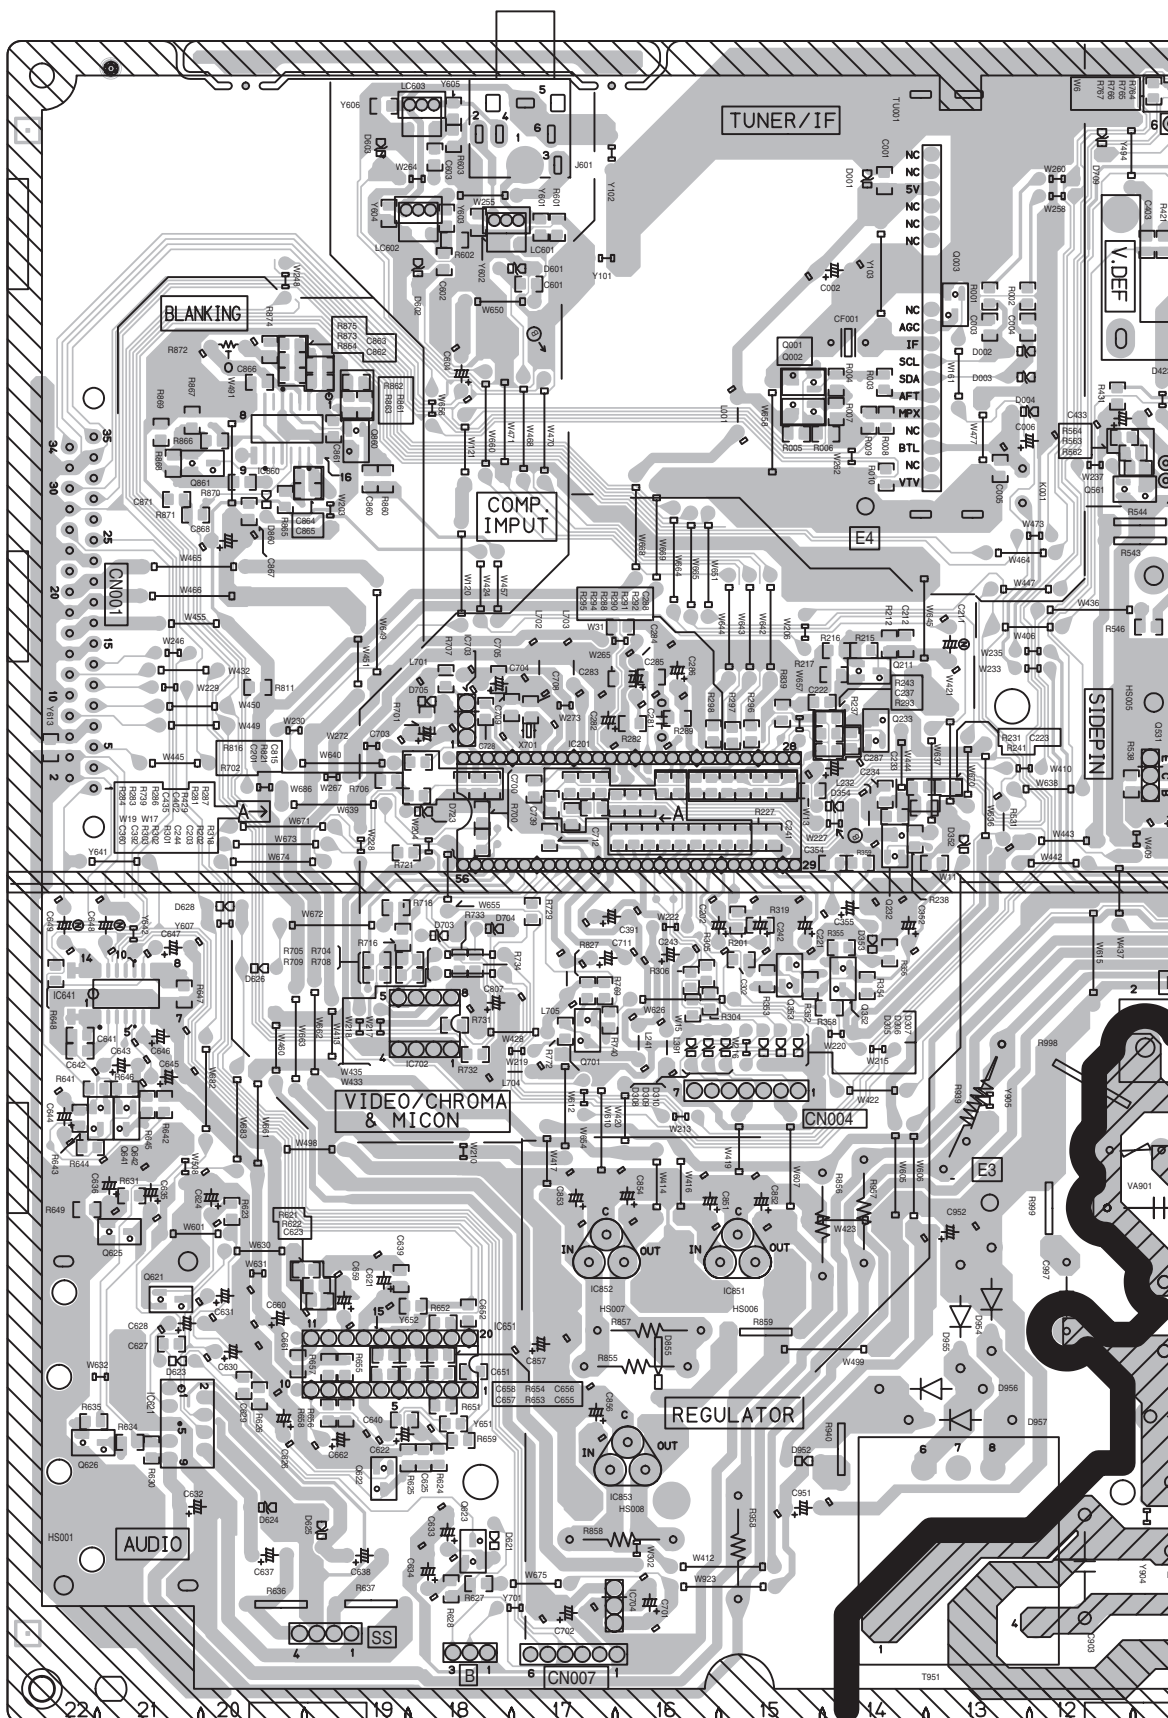




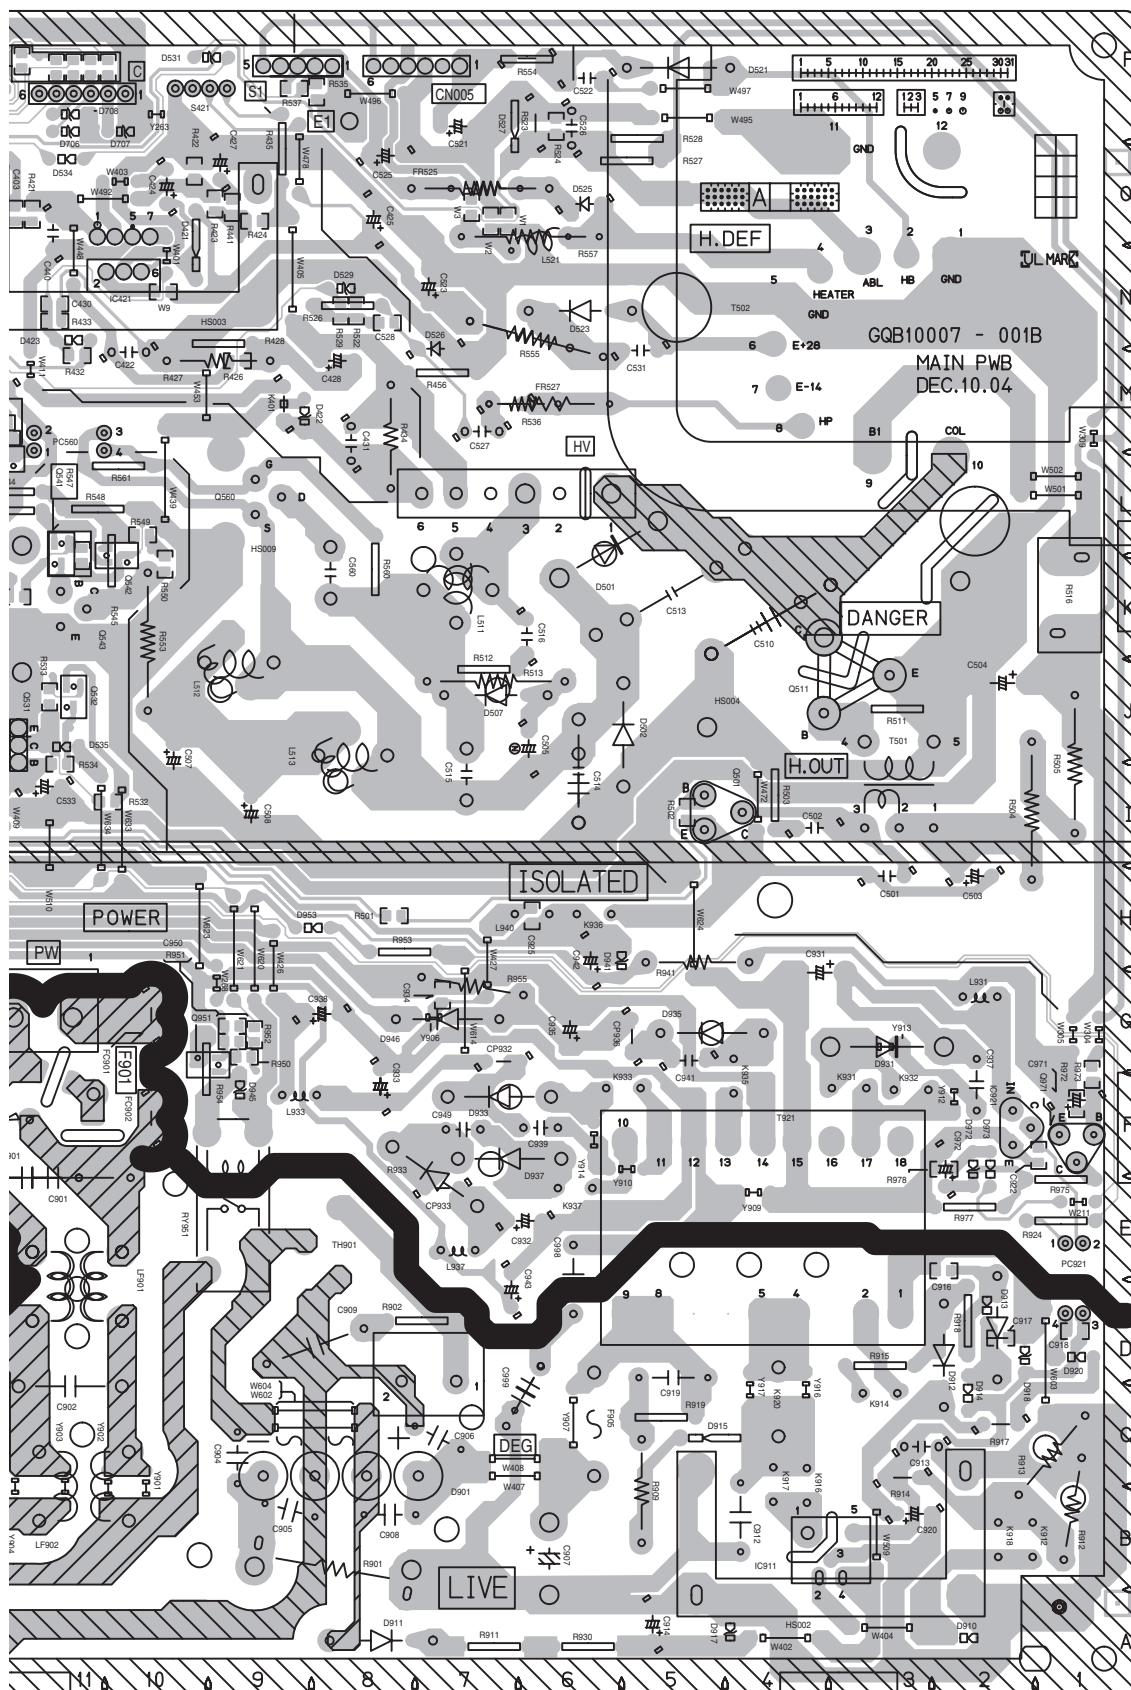

## AV SELECTOR PWB PATTERN

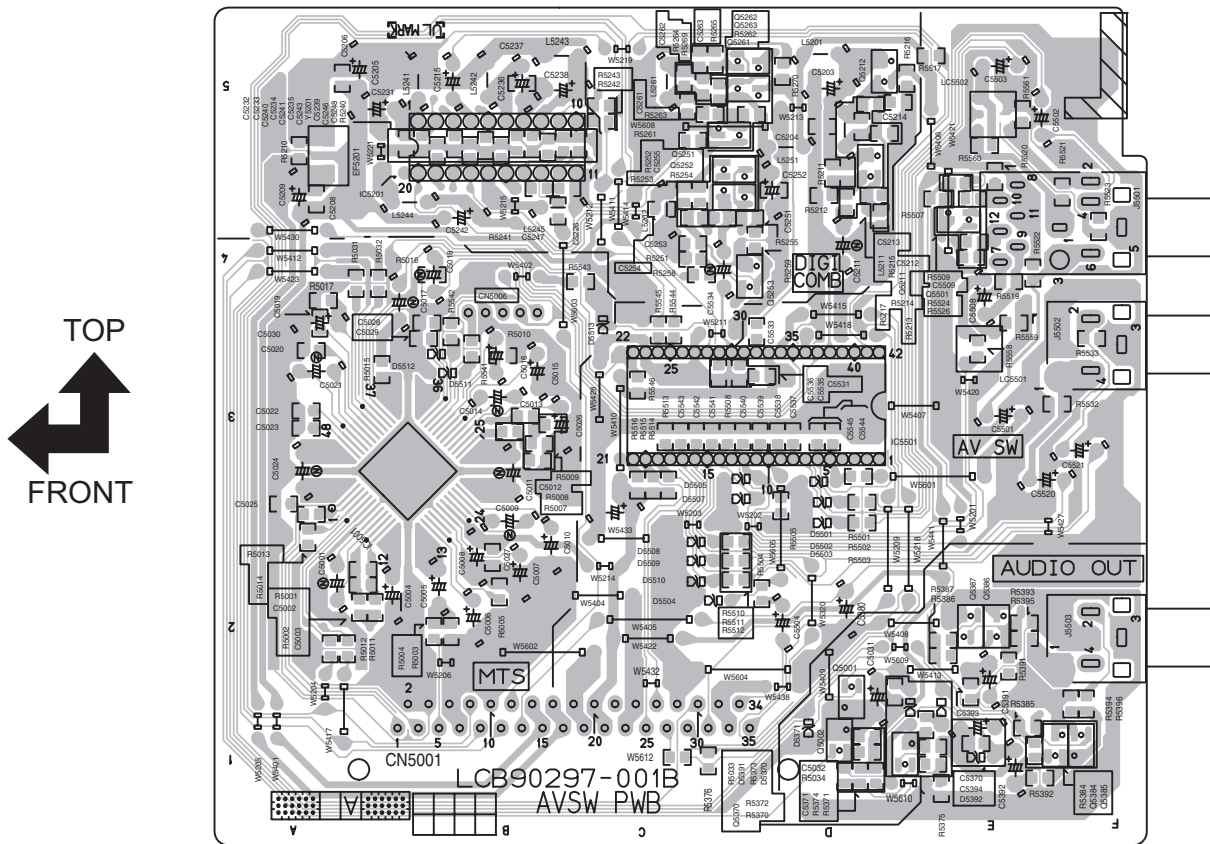

## CRT SOCKET PWB PATTERN

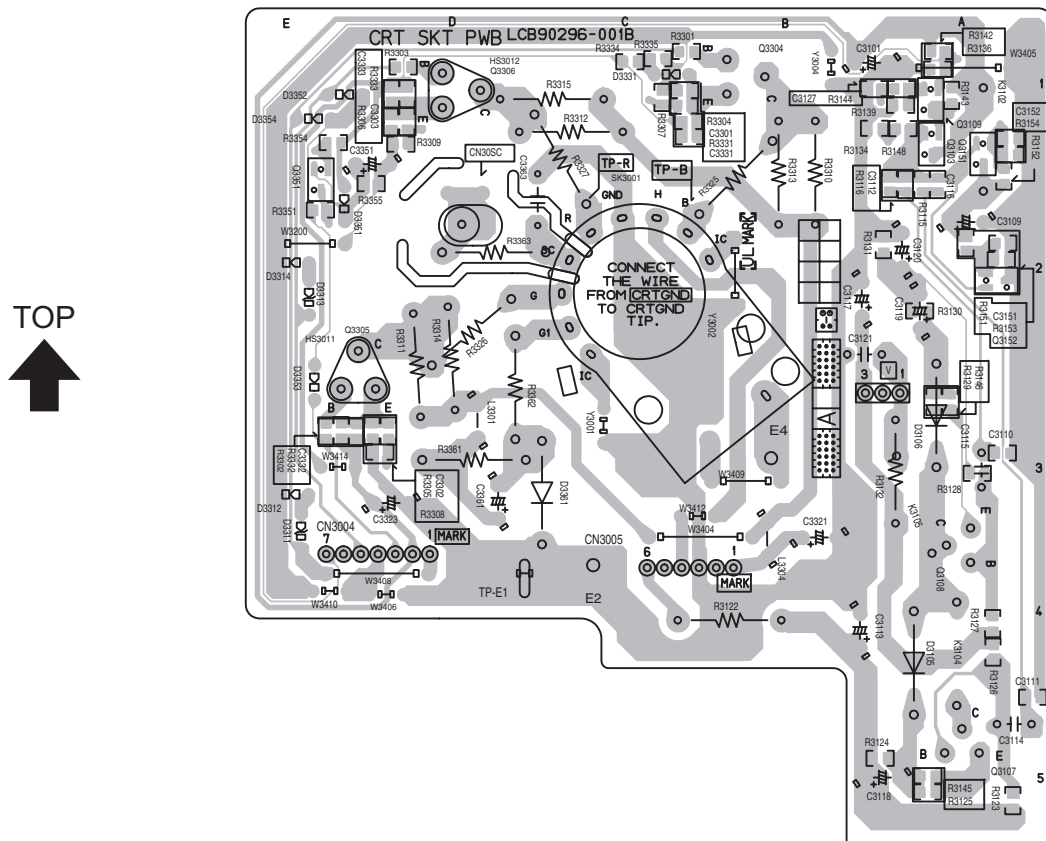

FRONT



FRONT  
←





Victor Company of Japan, Limited  
AV & MULTIMEDIA COMPANY VIDEO DISPLAY CATEGORY 12, 3-chome, Moriya-cho, kanagawa-ku, Yokohama, kanagawa-prefecture, 221-8528, Japan

(No.YA243)



Printed in Japan  
VPT